



Shellby 176 Trimless LED GE

121810XX_121811XX

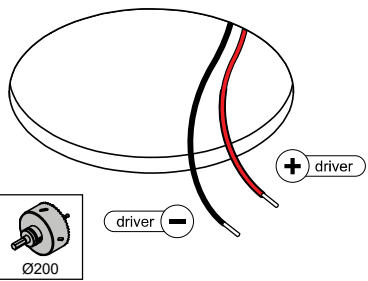



Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,8	18,0	5,7
500	15,2	18,6	8,5
700	15,9	19,5	12,4


For serial connection, respect polarity!
⊕ RED ⊖ BLACK

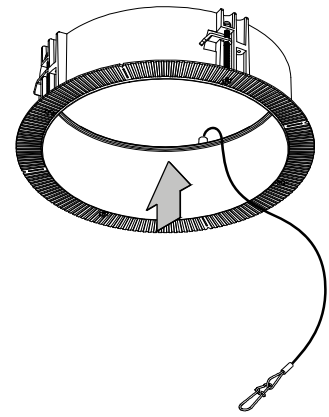



Accessory not included.
For detailed information check
corresponding installation instruction.

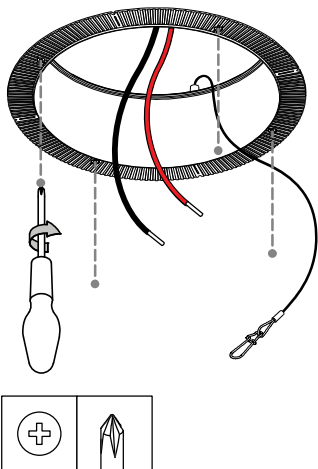


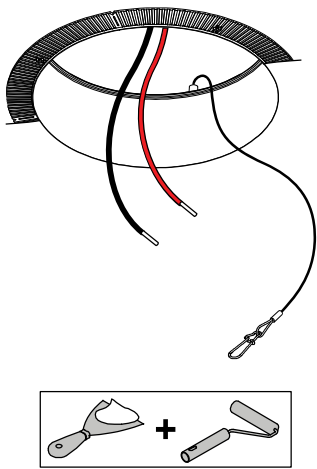

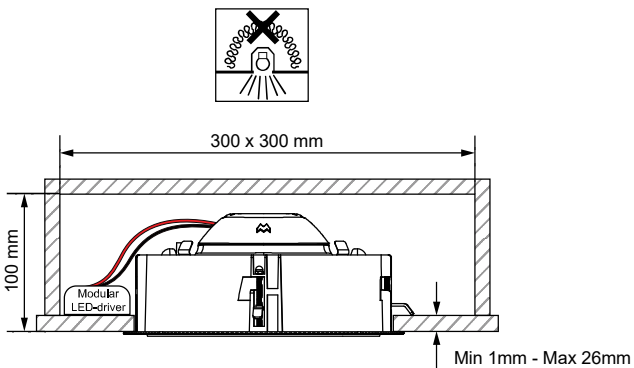


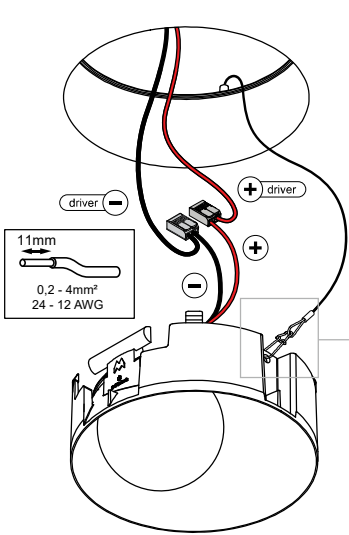


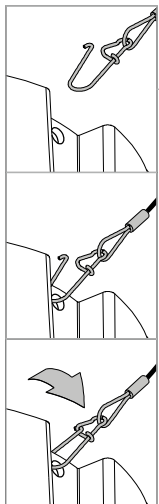
















Shellby 176 Trimless LED Warm Dim GE

121812XX

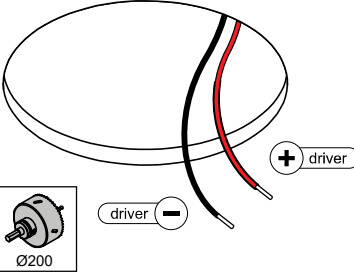

Ø200


driver +

driver -


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	30,6	37	11,8

For serial connection, respect polarity!


⊕ RED ⊖ BLACK

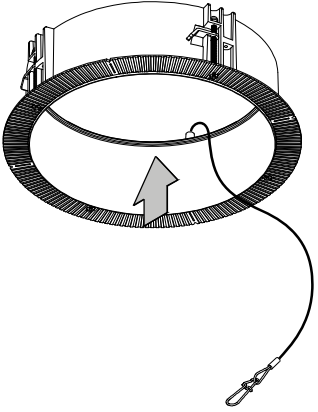


Accessory not included.
For detailed information check
corresponding installation instruction.

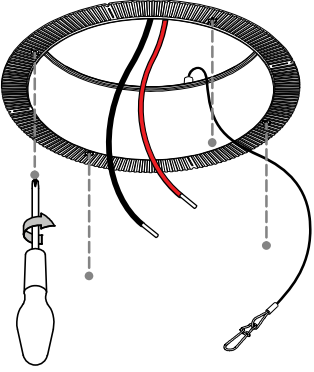

⊕

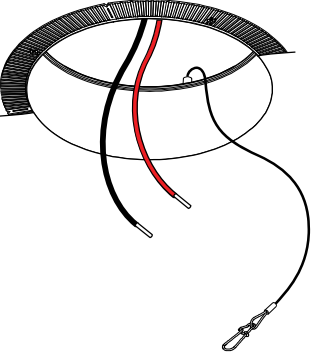

+

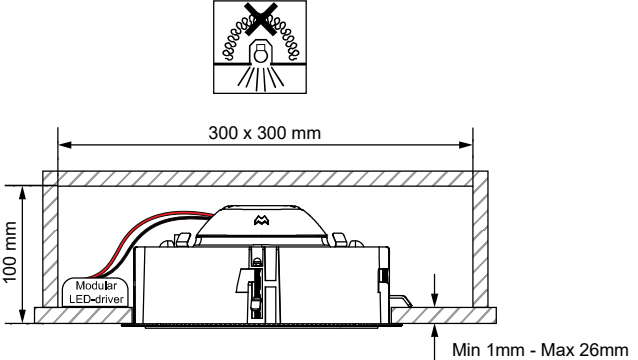


300 x 300 mm

100 mm

Modular LED-driver

Min 1mm - Max 26mm

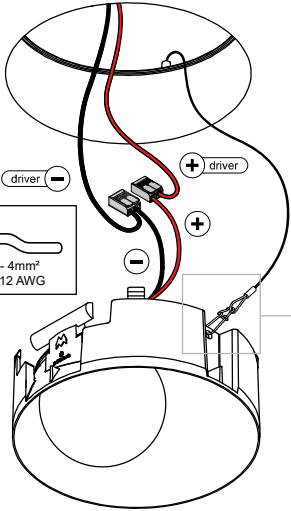


driver -


driver +

11mm

0.2 - 4mm²
24 - 12 AWG



click

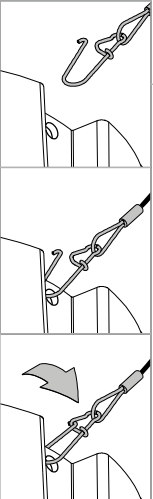

	Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number repair kit: 80000626
	LIGHT SOURCE - DO NOT TOUCH LED Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
	PREVENTING ELECTROSTATIC DAMAGE A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.
DRIVERS & ACCESSORIES For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.	



IP 55

CE