
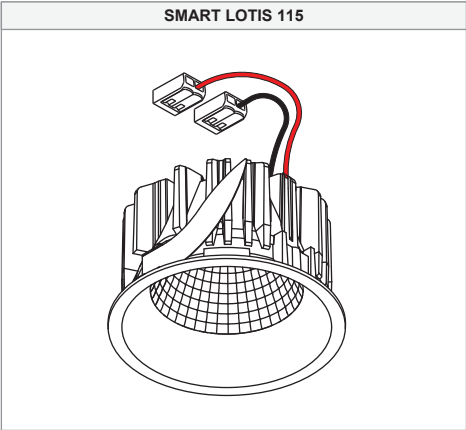
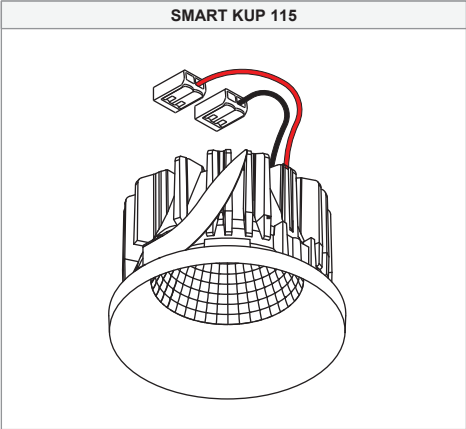


Smart Cake/Kup/Lotis 115 LED DE

127400XX_127401XX_127402XX_127410XX_127411XX_127412XX_127413XX_127414XX_127415XX_127416XX_127417XX_127418XX_127500XX_127501XX_127502XX_127510XX_127511XX_127512XX_127513XX_127514XX_127515XX_127516XX_127517XX_127518XX_127600XX_127601XX_127602XX_127610XX_127611XX_127612XX_127613XX_127614XX_127615XX_127616XX_127617XX_127618XX

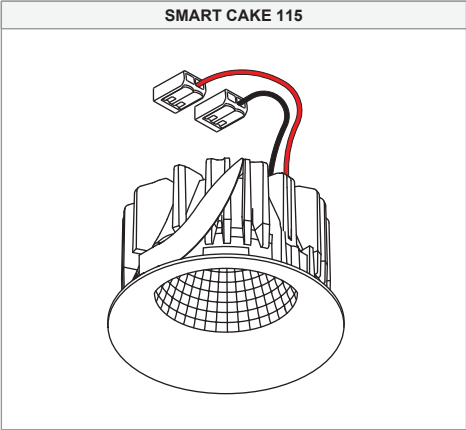

1


Ø108

ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	29,1	33,7	11,0
500	29,9	34,7	16,2
700	31,0	35,8	23,4

+ RED **- BLACK**

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

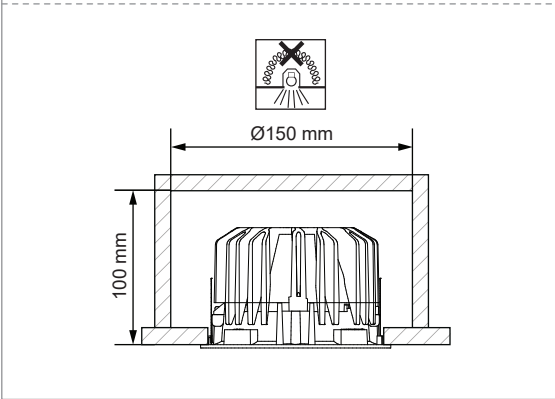

2

INSTALL **UNINSTALL**

3

SERIAL CONNECTION:

Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

3

ON

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.