Installation Instructions

ONIR LINEAR & FIBRE OPTIC LIGHTING

Side Bend Elite Low Glare 16x17

NF-ELT-SB- LG-1617-24V-9.6W-XXK-IP67

1. The most suitable operation temperature shall be -40℃ to 65℃.

2. Please make sure that even during installation, the predetermined bending direction will never change.
Side Bend Elite Low Glare 16x17 is SIDE bending only, and it can not be twisted or top bending.

3. Side Bend Elite Low Glare 16x17 shall not be bent sharply and it may cause product damage.


4.The maximum bending diameter is 300mm, over bending will damage and void any warranty.

5.During the installation, the Side Bend Elite Low Glare 16x17 can not be:
-Twisted
-Dropped
-Bent at a 90°angle or bent at all
-Sagging/Hanging down


6. Please make sure the product does not stick with any paper related material directly.


7. For installation, 2 ways for your selection.
-Mounting clips
-Profile

8. Install the product into profile carefully and correctly, taking out and re-assembling will most likely cause the product damaged.

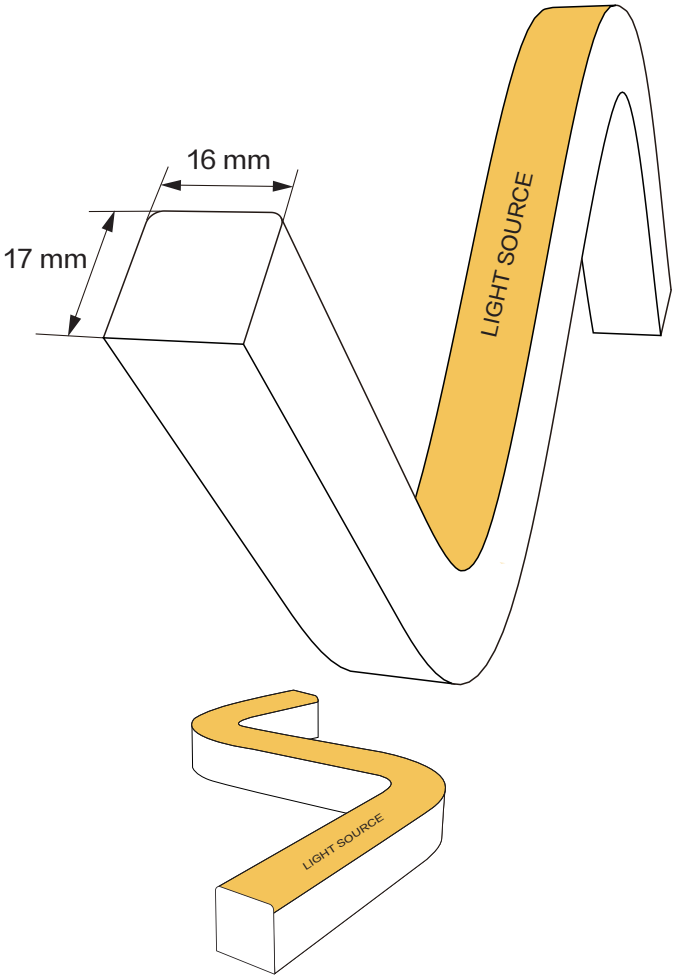


Side Bend Elite Low Glare 16x17
(SIDE BEND)



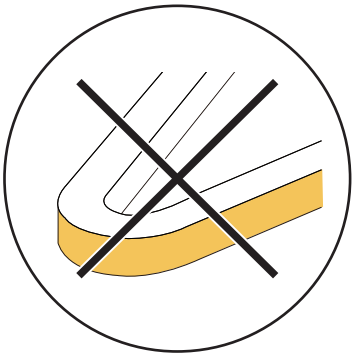


Bend too tight

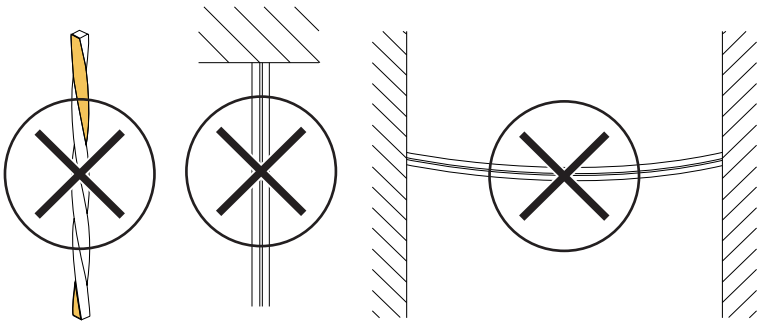


Do not twist Do not hang Do not droop


Warranty: All LED light are warranted to be free from defects in product itself from the date of purchase.
Within this period, we, at its sole option, repair or replace any components which fail from correct use. Such repairs or replacement will be made at no charge to the customer for parts only, provided that the customer shall be responsible for transportation cost of the goods.
This warranty does not cover failures due to abuse, misuse, improper handling, act of nature, negligence, normal wear, accidental damage, modifications or repairs made by the purchaser or incorrect voltage conditions.


2x 2x 2x 1Mtr/pcs





Clips

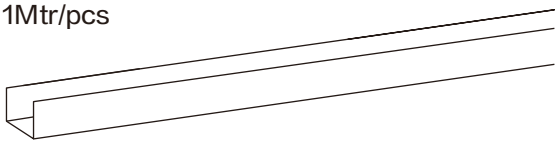
Profile

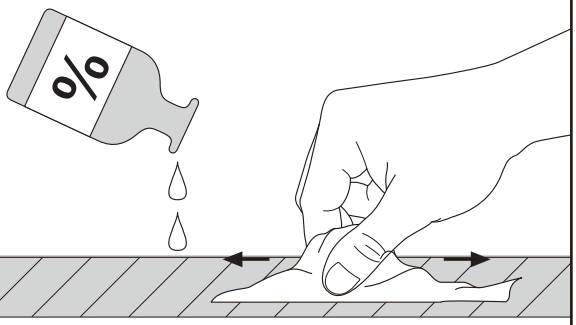
Ensure the mounting surface is clean and dry.





Clips

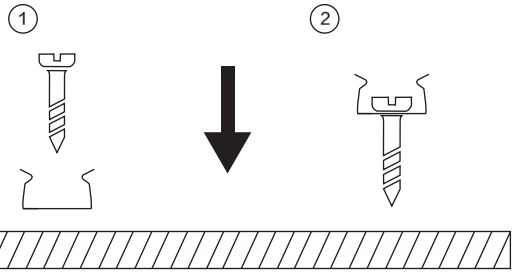


Press in gently with palm instead of fingers.

Profile

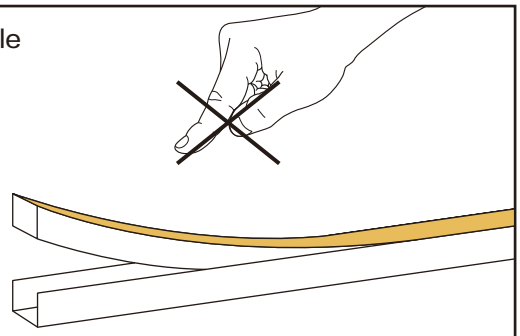
Press in gently with palm instead of fingers.

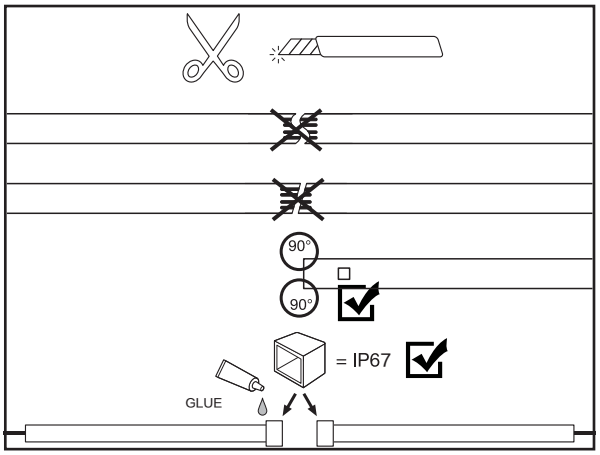

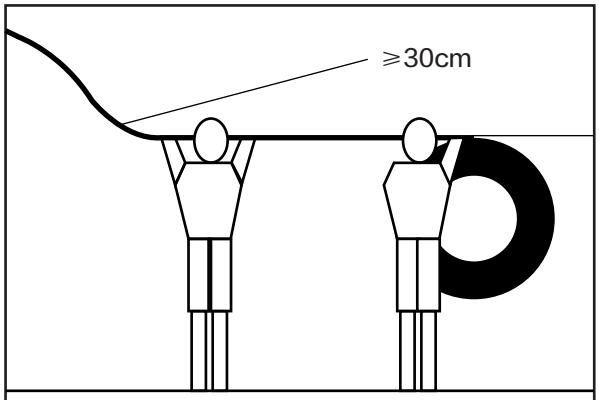

Two Person Installation

CAUTION: During removal, maintain a tilt angle of ≤ 15° when lifting the strip from the profile; excessive prying will damage the inside FPCB.

