

belux



kido

belux



reddot winner 2022
lighting design

kido

Art Director Kristof Pycke and engineer Bruno Aeberli

With the new belux kido family, belux has reached a new milestone in its product range of high-quality office and object lighting. The Swiss luminaire manufacturer turned to Kristof Pycke, the Belgian Art Director of kreon, for the design of the new luminaire family. Working closely with engineer Bruno Aeberli from belux and experts for office lighting, he was responsible for the design process and managed to make a statement with the timelessly elegant lines of belux kido. The belux kido family reflects the typical stylistic idiom of the belux office range.

belux



4


kido

5

belux

Available as standing light, pendant light and desk-mounted luminaire, belux kido is the functional and aesthetic answer to every requirement of modern office concepts, and gives architects and interior designers a maximum of flexibility in their designs.

STANDING LIGHTS

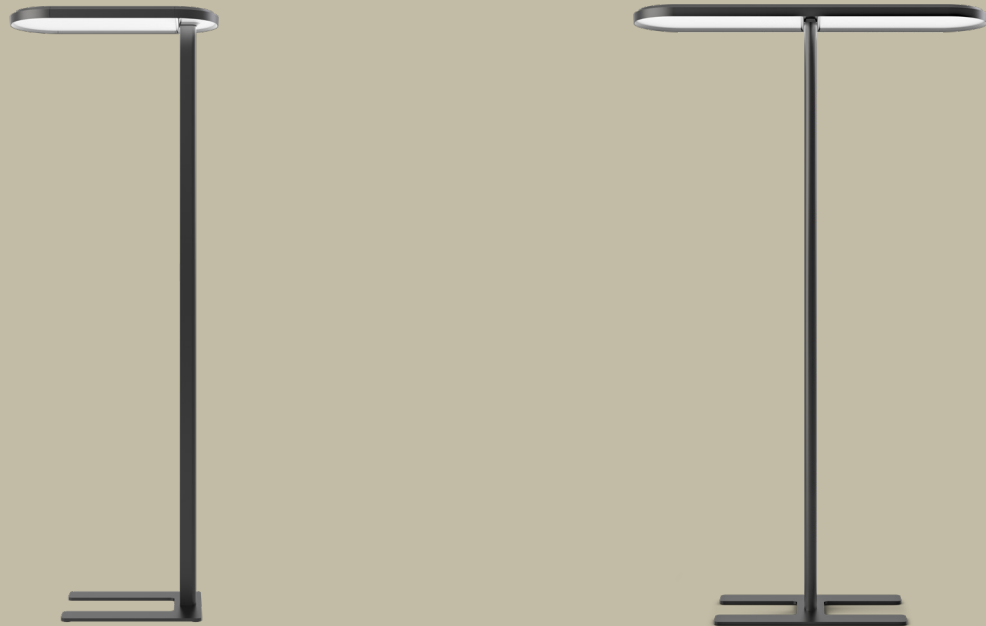

kido

PENDANT LIGHTS



DESK-MOUNTED LUMINAIRES



belux

kido



belux

kido

ASYMMETRIC

SYMMETRIC





single

double



20% direct, 80% indirect

20% direct, 80% indirect

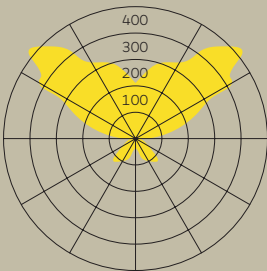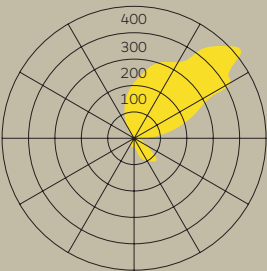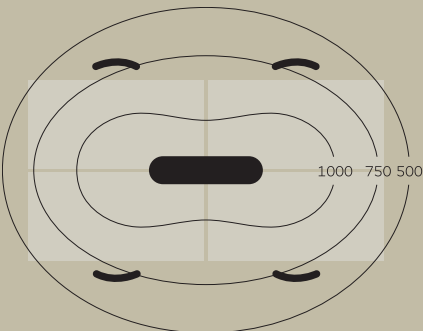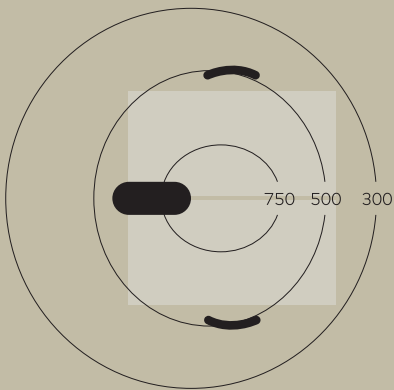


kido 12



kido 50







kido 56

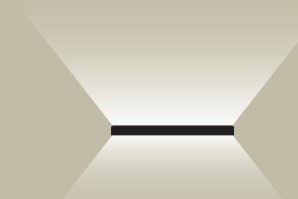

30% direct, 70% indirect

30% direct, 70% indirect

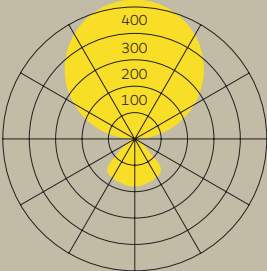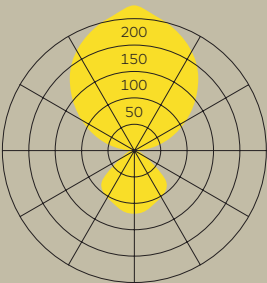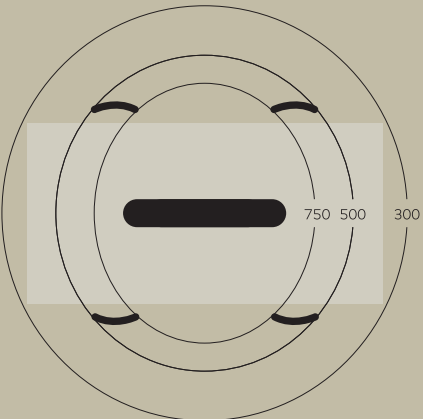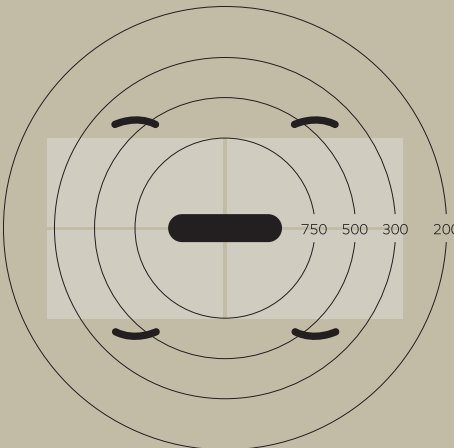

kido 46



kido 30




kido 32

belux

kido

Unsurpassed room-filling and homogeneous light

The innovation aspect of belux kido lies in the ingenious decoupling plate with its increasing density of decoupling points over the entire light path. This provides homogeneous illumination of the workplace, plus extremely uniform brightness at the head of the luminaire.

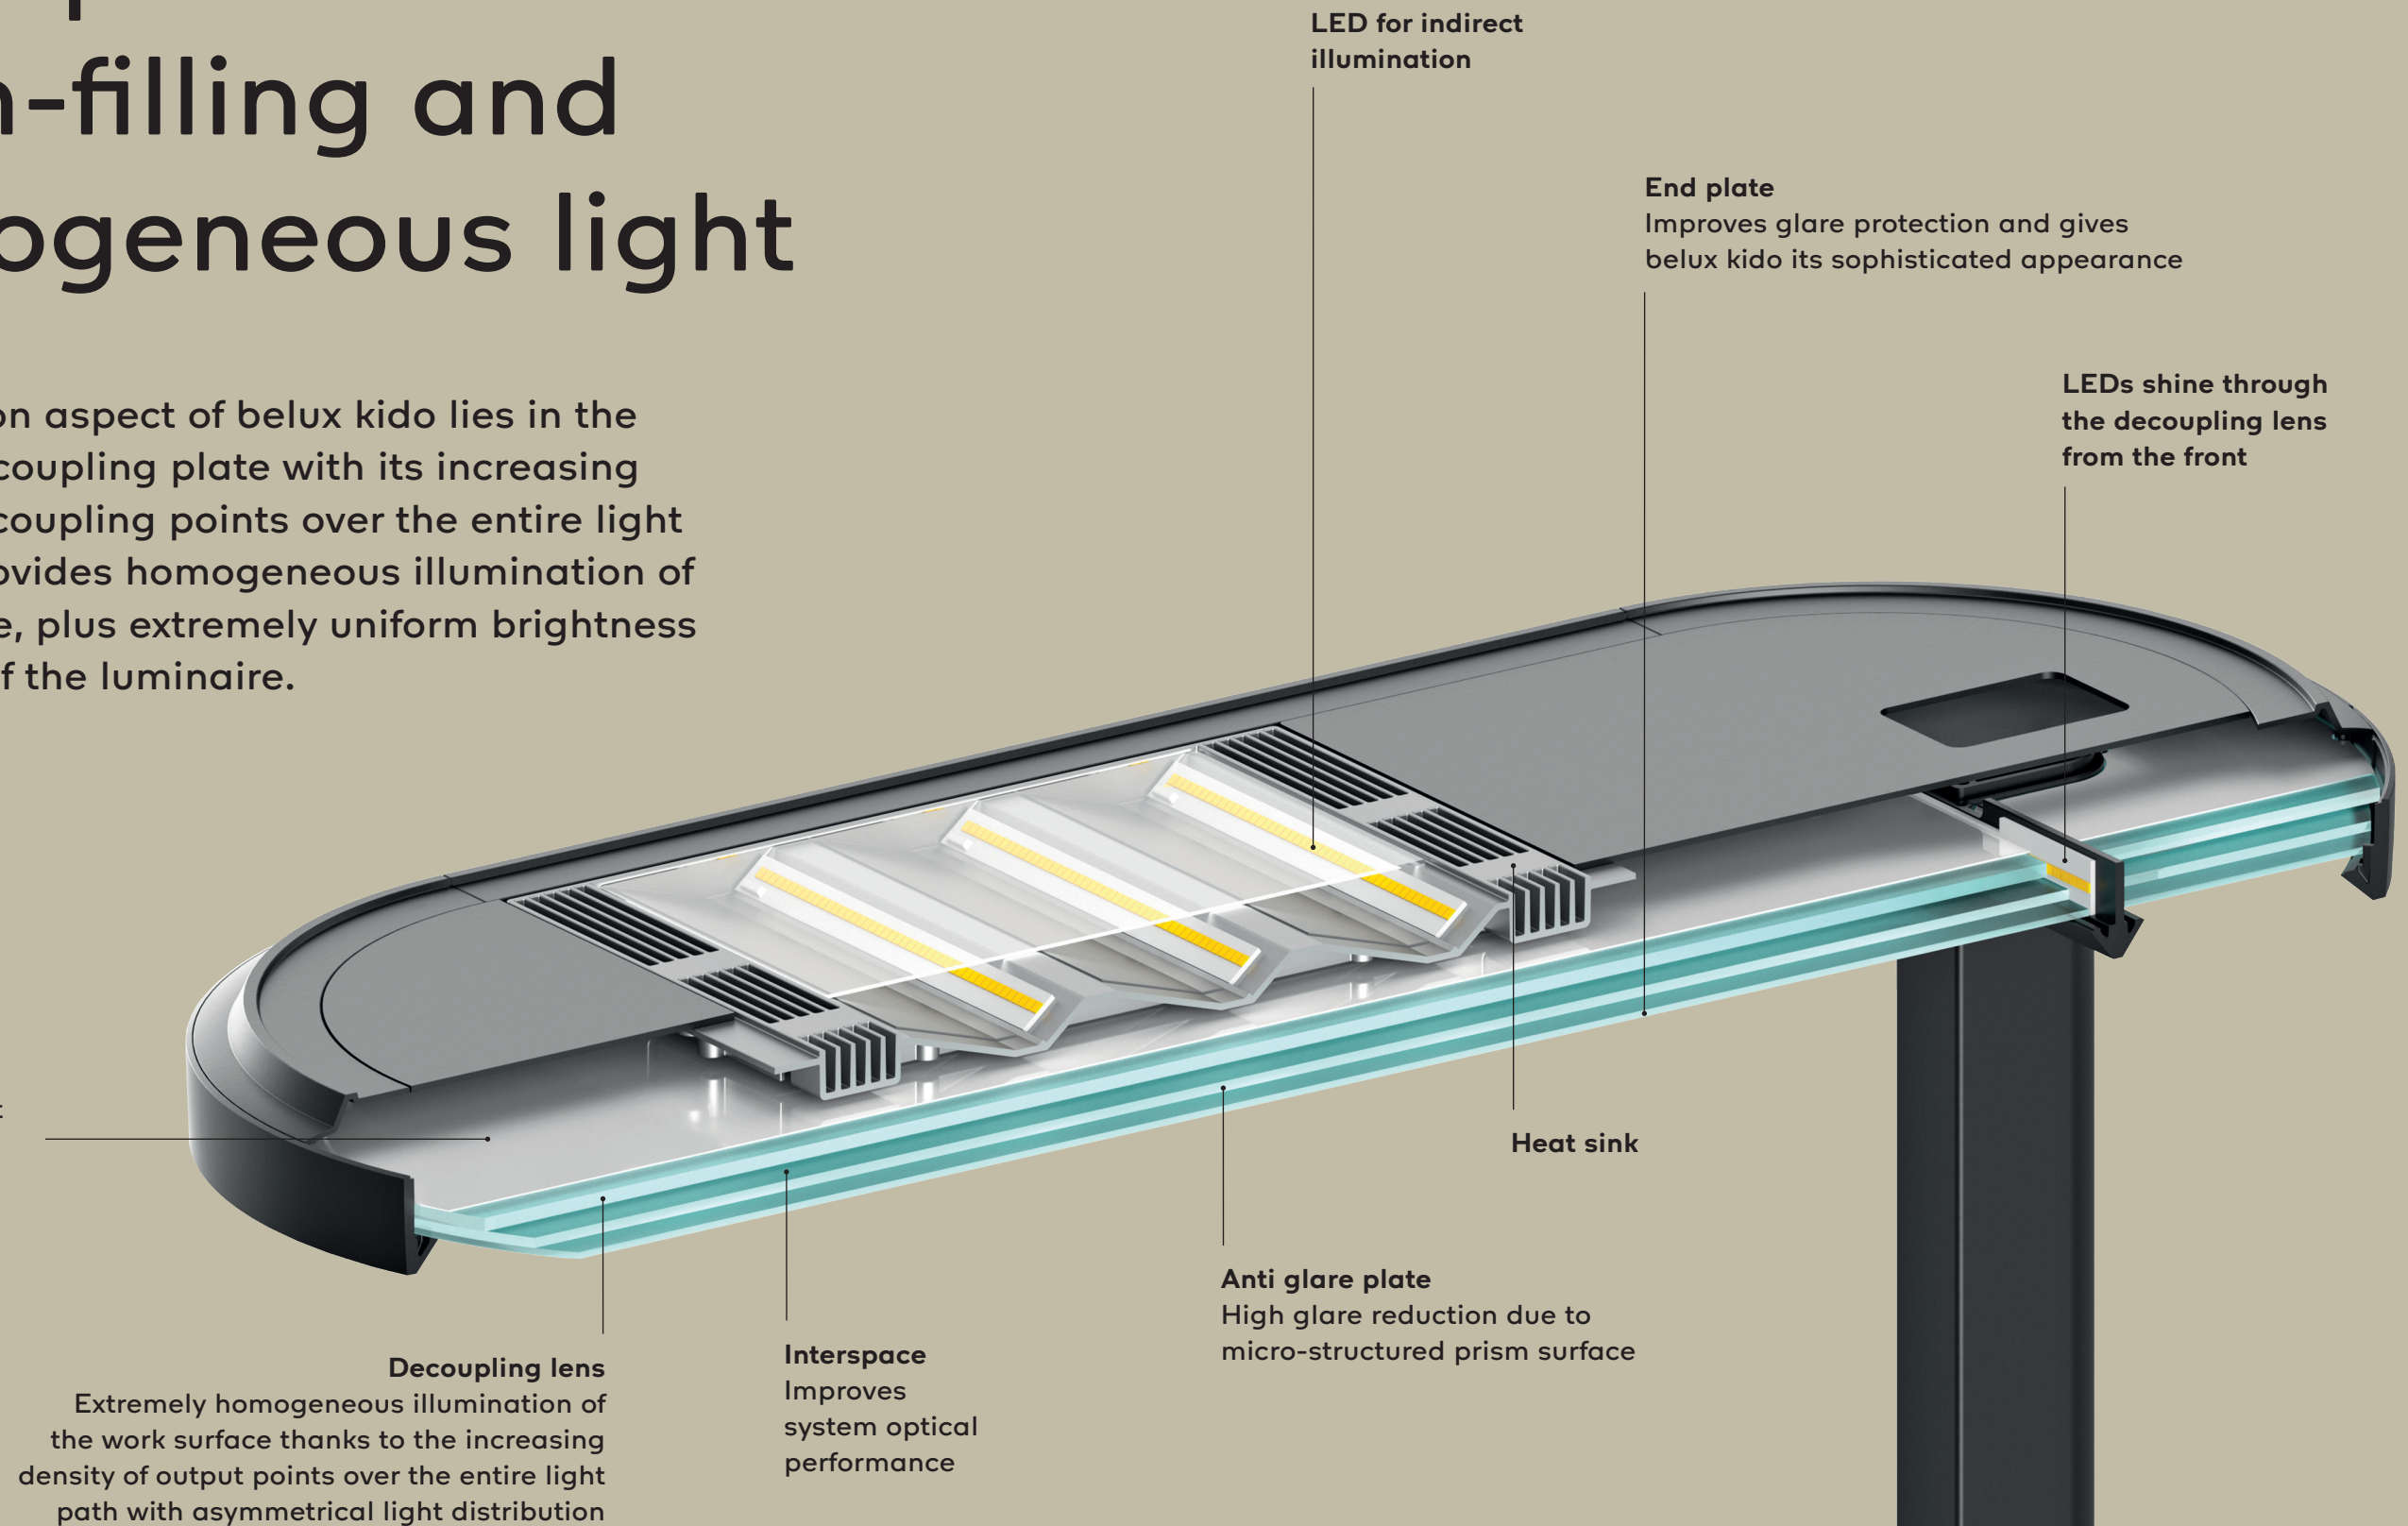

belux

kido



14

15

belux

11200 lumen output makes belux kido a real powerhouse. The high direct light component of 20% efficiently directs a lot of light to the workplace. And this with just 90 watts of energy consumption for two workstations. As well as the high light yield, the optional 'Multisens' version with daylight and presence sensor has even more savings potential.



Off



Direct

kido



Indirect



Direct & Indirect



Touch button for direct and indirect light



Light source
LED, 90W,
11200lm
CRI>80
3000K, 4000K



Light distribution
Asymmetric:
20% direct, 80% indirect
Symmetric:
30% direct, 70% indirect



Optic
Optical system with
light guidance and
anti-glare plates



Light management
Touchdim & Multisens.
Swarm technology
on request



Energy-efficiency classification LED
A+




Colors
Black & White

belux


kido



kido standing light
U-base

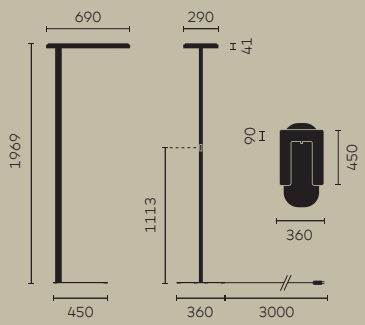

kido standing light
T-base

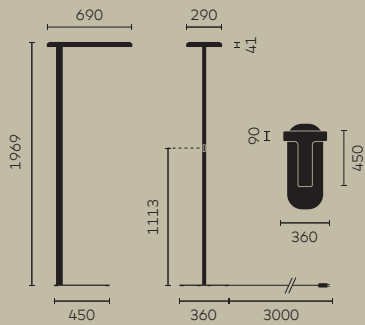

		Colour	Light source	Basic code	8030 3000K	8040 4000K	TD Dimmable, on stand	MS Multisens, self-adjusting	Order number
[	kido standing light U-base asymmetrical output Material: PMMA, aluminium, steel, black power cable ≈ 3m Application : 2 workstations	WE	①	KID12-15	●	●	●	●	KID12-15-8030-TD KID12-15-8030-MS KID12-15-8040-TD KID12-15-8040-MS
		SW	①	KID12-18	●	●	●	●	KID12-18-8030-TD KID12-18-8030-MS KID12-18-8040-TD KID12-18-8040-MS
		WE	①	KID12-15T	●	●	●	●	KID12-15T-8030-TD KID12-15T-8030-MS KID12-15T-8040-TD KID12-15T-8040-MS
		SW	①	KID12-18T	●	●	●	●	KID12-18T-8030-TD KID12-18T-8030-MS KID12-18T-8040-TD KID12-18T-8040-MS




REMARKS


General: Light distribution: 20% direct/80% indirect
UGR<10, LED service life: 55,000h (L85), converter integrated in luminaire pole
TD: Direct and indirect light can be separately switched and dimmed by means of a 2 circuit push button
Multisens: Daylight and motion sensor for automatic operation, individual parameter adjustment on request

Wireless Dim: Control via Casambi App or wireless 'Casambi Xpress Switch' on request
① CRI90+: On request
WE: White
SW: Black
⊕ IP 20
LED A+


kido 12
125lm/W@4000K

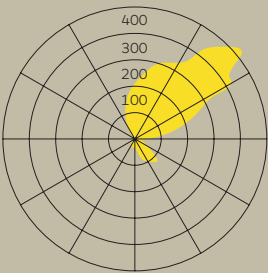


kido standing light
double head H-base

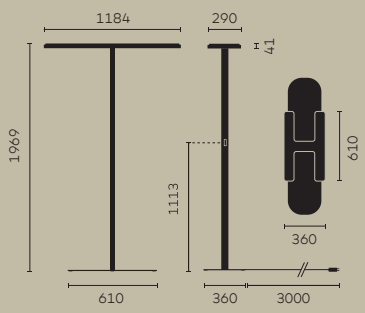

kido standing light
double head X-base

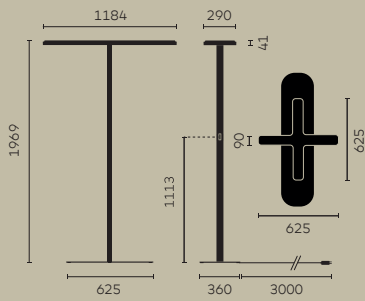

kido desk-mounted
double head

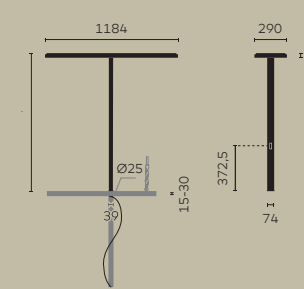

kido standing light double head H-base
asymmetrical output

Material: PMMA, aluminium, steel, black power cable ≈ 3m
Application : 4 workstations

kido standing light double head X-base
asymmetrical output

Material: PMMA, aluminium, steel, black power cable ≈ 3m
Application : 4 workstations

kido desk-mounted light double head
asymmetrical output

Material: PMMA, aluminium, steel, black power cable ≈ 3m
Fixation: universal-d
Application : 4 workstations

		CRI ①	CCT	Wattage	Lumen@4000K
①	LED	CRI > 80	3000/4000K	2x90W	2x11200lm

Colour

Light source

Basic code

8030
3000K

8040
4000K

TD
Dimmable, on stand

MS
Multisens, self-adjusting

Order number

WE

①

KID50-15

●

●

●

●

KID50-15-8030-TD
KID50-15-8030-MS
KID50-15-8040-TD
KID50-15-8040-MS

SW

①

KID50-18

●

●

●

●

KID50-18-8030-TD
KID50-18-8030-MS
KID50-18-8040-TD
KID50-18-8040-MS

WE

①

KID50-15X

●

●

●

●

KID50-15X-8030-TD
KID50-15X-8030-MS
KID50-15X-8040-TD
KID50-15X-8040-MS

SW

①

KID50-18X

●

●

●

●

KID50-18X-8030-TD
KID50-18X-8030-MS
KID50-18X-8040-TD
KID50-18X-8040-MS

WE

①

KID56-15

●

●

●

●

KID56-15-8030-TD
KID56-15-8030-MS
KID56-15-8040-TD
KID56-15-8040-MS

SW

①

KID56-18

●

●

●

●


KID56-18-8030-TD
KID56-18-8030-MS
KID56-18-8040-TD
KID56-18-8040-MS

REMARKS


General: Light distribution:
20% direct/80% indirect
UGR<10, LED service
life: 55,000h (L85),
converter integrated in
luminaire pole
TD: Direct and indirect
light can be separately
switched and dimmed
by means of a 2 circuit
push button
Multisens: Daylight and
motion sensor for automat-
ic operation, individual
parameter adjustment
on request

kido desk-mounted:
Desk adapter on request.
Information furniture
manufacturer and furniture
type (drawings) required
Wireless Dim: Control via
Casambi App or wireless
‘Casambi Xpress Switch’
on request
① CRI90+: On request
WE: White
SW: Black
⊕ IP 20
LED A+

kido 50/56
125lm/W@4000K

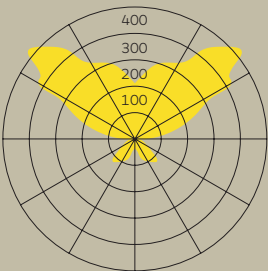


kido pendant light (1100mm)




 **kido pendant light (1100mm)**
Material: PMMA, aluminium, transparant power cable




kido pendant light (1500mm)

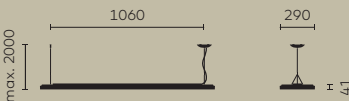

 **kido pendant light (1500mm)**
Material: PMMA, aluminium, transparant power cable



kido desk-mounted

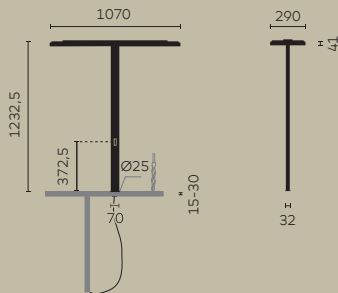

 **kido desk-mounted light double head symmetrical output**
Material: PMMA, aluminium, steel, black power cable ≈ 3m
Fixation: universal-d
Application : meeting table



		CRI ①	CCT	Wattage	Lumen@4000K
①	LED	CRI > 80	3000/4000K	91W	12500lm
②	LED	CRI > 80	3000/4000K	116W	16200lm

Colour	Light source	Basic code	8030 3000K	8040 4000K	DD Dimmable DALI, on site	MS Multisens, self-adjusting
--------	--------------	------------	---------------	---------------	------------------------------	---------------------------------

WE	①	KID30-14	●	●	●	●
----	---	-----------------	---	---	---	---

KID30-14-8030-DD
KID30-14-8030-MS
KID30-14-8040-DD
KID30-14-8040-MS

SW	①	KID30-17	●	●	●	●
----	---	-----------------	---	---	---	---

KID30-17-8030-DD
KID30-17-8030-MS
KID30-17-8040-DD
KID30-17-8040-MS

WE	②	KID32-14	●	●	●	●
----	---	-----------------	---	---	---	---

KID32-14-8030-DD
KID32-14-8030-MS
KID32-14-8040-DD
KID32-14-8040-MS

SW	②	KID32-17	●	●	●	●
----	---	-----------------	---	---	---	---

KID32-17-8030-DD
KID32-17-8030-MS
KID32-17-8040-DD
KID32-17-8040-MS

WE	①	KID46-15	●	●	●	●
----	---	-----------------	---	---	---	---

KID46-15-8030-TD
KID46-15-8030-MS
KID46-15-8040-TD
KID46-15-8040-MS

SW	①	KID46-18	●	●	●	●
----	---	-----------------	---	---	---	---


KID46-18-8030-TD
KID46-18-8030-MS
KID46-18-8040-TD
KID46-18-8040-MS

REMARKS


General: Light distribution: 30% direct/70% indirect, UGR<11, LED service life: 55,000h (L85), converter integrated in luminaire
Dimmable DALI: Features two addresses, one each for the direct light and indirect light
Multisens: Daylight and motion sensor for automatic operation, individual parameter adjustment on request

Wireless Dim: Control via Casambi App or wireless 'Casambi Xpress Switch' on request
① CRI90+: On request
WE: White
SW: Black
⊕ IP 20
LED A+

kido 30/46
137lm/W@4000K

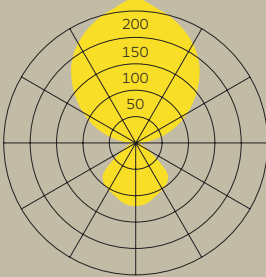

kido 32
140lm/W@4000K

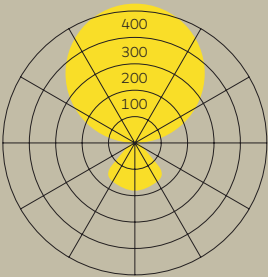

belux HQ

Neufeldweg 6
5103 Möriken
Switzerland
T +41 61 316 74 01
belux@belux.com

belux Belgium

Industrieweg Noord 1152
3660 Oudsbergen
Belgium
T +32 89 81 97 80
belgium@belux.com

belux Austria

Kärntner Ring 4
1010 Vienna
Austria
T +43 1 715 44 25
austria@belux.com

belux China

Rm 208, Building 5, N° 33
Lane 672, Changle Road
JingAn District
Shanghai
P.R. China
china@belux.com

belux France

5, rue d'Aboukir
75002 Paris
France
T +33 1 44 50 53 54
france@belux.com

belux Germany

Brühler Straße 11-13
50968 Cologne
Germany
Tel +49 221 937 22 0
germany@belux.com

belux Italy

Via V. Forcella 5
20144 Milano
Italy
T +39 02 89 42 08 46
italy@belux.com

belux Middle East

Dubai Airport Free
Zone Area (DAFZA)
West Wing 6 (W6)
Office 6 WA 420
P.O. Box 293845
Dubai
United Arab Emirates
T +971 4 6091 355
middle.east@belux.com

belux North America & Canada

20 Murray Hill Parkway
Suite 180
East Rutherford, NJ 07073
USA
T +1 516 470 9522
usa@belux.com

belux Poland

T +48 504 788 355
Poland
poland@belux.com

belux Russia

T +79257081901
Russia
russia@belux.com

belux Scandinavia

T +45 (0)71 37 02 39
scandinavia@belux.com

belux South East Asia

63a Club Street
Singapore 069 437
Singapore
T +65 62 22 33 93
singapore@belux.com

belux Spain

Ángel Guimera 7-9 local C
Barcelona 08017
Spain
T +34 600 462 551
spain@belux.com

belux The Netherlands

Danzigerbocht 39a
1013 AM Amsterdam
The Netherlands
T +31 (0)2 02 153 333
the.netherlands@belux.com


belux Turkey

Sehit Murat Demirli
Cad. Resadiye Yolu 76
Alemdag-Ümraniye 34794
Istanbul
Turkey
T +90 216 430 86 00
turkey@belux.com

belux UK

67 Maltings Place
169 Tower Bridge Road
London SE1 3LJ
United Kingdom
T +44 (0)20 7740 2112
uk@belux.com



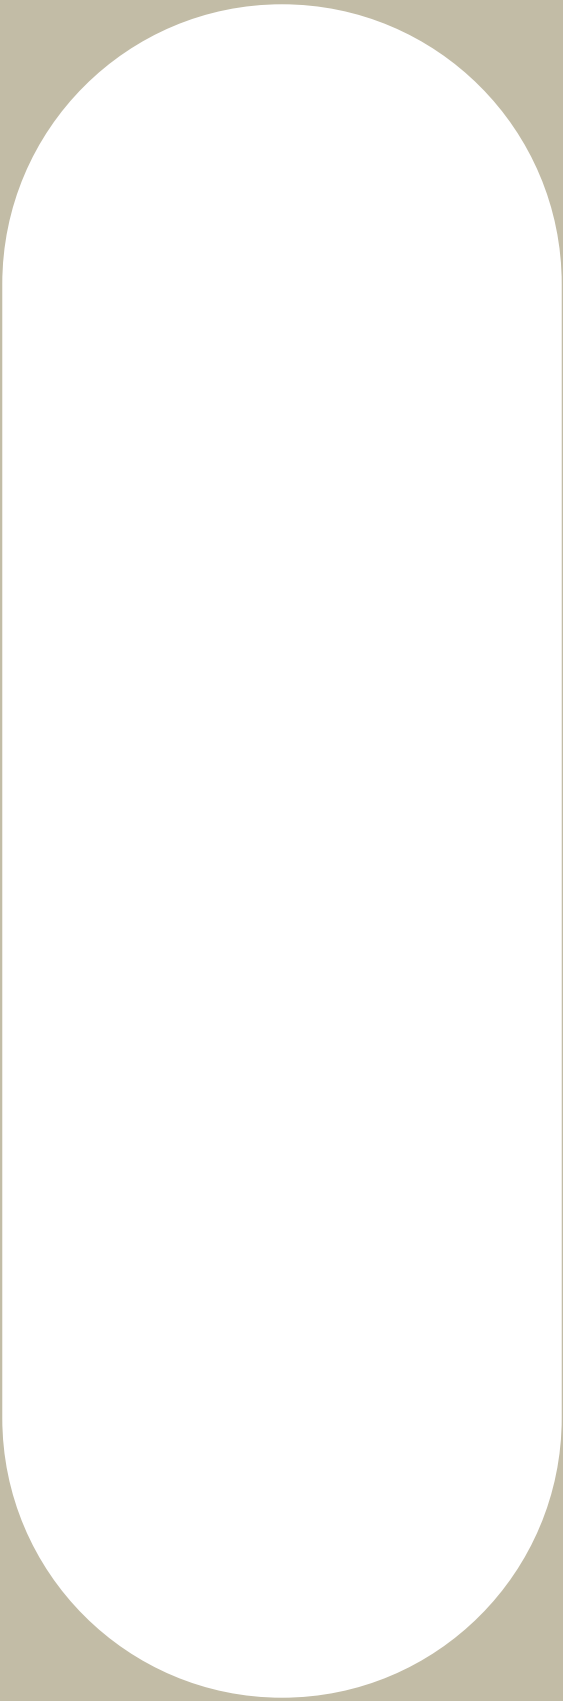

belux.com/kido