



LED

Norms: EN 60598-1, EN 60598-2-1



IP 40

24V DC

850°C

PRODUCT DESCRIPTION

**Areas of Application:** Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

**Mounting:** Suspended.

**Light Distribution:** Direct / Indirect.

**Light Source:** LED 4000K, CRI>90, 60.000h life (@L80, B10, Ta 25 °C).

**Optical System:** Diffuser: Opal polycarbonate.

**Control Gear:** Not included.

**Materials:** Body: Extruded aluminium.

**Surface Finish:** Powder coated.

bLINE - Opal polycarbonate diffuser



| LED | UGR | W  | Lm   | V  | η(%) | AxB(mm)  | kg | ORDER CODE   |
|-----|-----|----|------|----|------|----------|----|--------------|
|     | ≤22 | 25 | 2340 | 24 | 55   | Ø630x35  | 2  | 90401.L630.0 |
|     | ≤22 | 39 | 3640 | 24 | 53   | Ø950x35  | 3  | 90401.L950.0 |
|     | ≤19 | 53 | 4940 | 24 | 55   | Ø1270x35 | 4  | 90401.L127.0 |
|     | ≤19 | 65 | 6110 | 24 | 52   | Ø1555x35 | 5  | 90401.L155.0 |
|     | -   | 83 | 7800 | 24 | -    | Ø1970x35 | 6  | 90401.L197.0 |

Note:  
To complete the product add suspension ceiling rose. Please order separately. Suspension kit is included in the product (1,5 m).  
In the option RGBW, the product mandatorily includes the transparent current supply cable.


Example code for order: 90401.L630.0 (ORDER CODE) + W(COLOUR/FINISH) + 2000(OPTIONS)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

### COLOUR / FINISH


| Code | Description    |
|------|----------------|
| W    | White          |
| G    | Grey           |
| B    | Black          |
| U    | Blue           |
| V    | Green          |
| T    | Yellow         |
| K    | Red            |
| N    | Jungle         |
| D    | Golden eye     |
| O    | Sahara         |
| L    | Autumn         |
| R    | Rusty chain    |
| C    | Pure chocolate |
| 1    | Mist           |
| 9    | Dark rock      |
| I    | Carbon         |

### DIMENSIONS

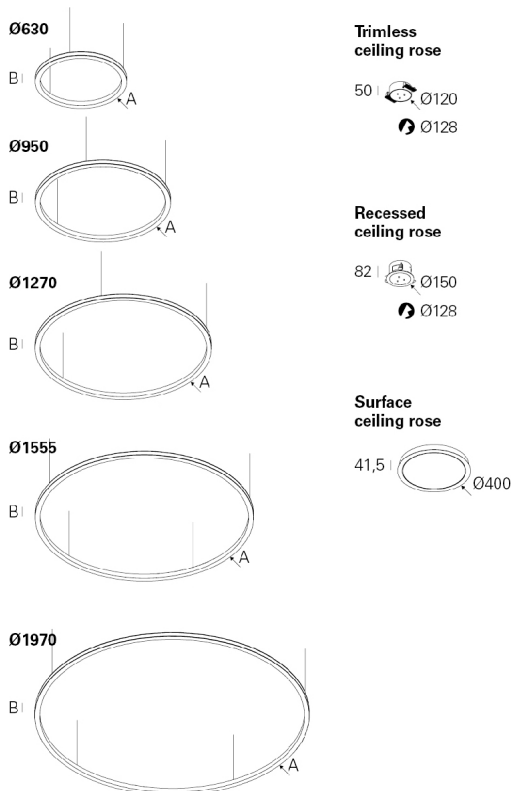

### OPTIONS

#### Colour temperature



2700K  
3000K  
Tunable White (3000K - 5700K)  
RGB White (2700K)

• TW and RGBW are only available with OmniaControl.

#### Order code

**2000**  
**3000**  
**T000**  
**R000**

#### Surface ceiling rose



HF  
DALI  
OmniaControl (Voice/App)

• To complete this option,  
please add ceiling rose colour.

#### Order code

**9752**  
**9753**  
**9754**

#### Recessed ceiling rose



HF  
DALI  
OmniaControl (Voice/App)

• To complete this option,  
please add ceiling rose colour.

#### Order code

**9755**  
**9756**  
**9757**

#### Trimless ceiling rose



HF  
DALI  
OmniaControl (Voice/App)


• To complete this option,  
please add ceiling rose colour.

#### Order code


**9758**  
**9759**  
**9760**

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.


### PHOTOMETRY




**OREO Out Ø630mm**  
**bLINE 4000K**



**OREO Out Ø950mm**  
**bLINE 4000K**



**OREO Out Ø1270mm**  
**bLINE 4000K**



**OREO Out Ø1555mm**  
**bLINE 4000K**

### TO SPECIFY:

Circular LED luminaire, for horizontal suspension. Extruded aluminium body with 35x35 mm, epoxy polyester powder-coated. Available in 5 sizes (Ø630, 950, 1270, 1555 and 1970mm), with bLINE diffuser, opal polycarbonate clip-in diffuser. With outward light. Standard version in 4000K LED, CRI>90, 60.000h lifetime (@L80, B10, Ta 25 °C) and without any visible power-supply cable. Ceiling rose available as recessed mounted with trim or trimless or surface mounted, in on/off, dimmable DALI or with OmniaControl. 2700K, Tunable White and RGB White available as options. Available in 16 different colours. – as Indelague OREO OUT.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.