



LED

Norms: EN 60598-1, EN 60598-2-1



IP 40

24V DC

850°C

PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Suspended.

Light Distribution: Direct/Indirect.

Light Source: LED 4000K, CRI>90, 60.000h life (@L80, B10, Ta 25 °C).

Optical System: Diffuser: Polycarbonate.

Control Gear: Not included.

Materials: Body: Extruded aluminium.

Surface Finish: Powder coated.


bLINE - Opal polycarbonate diffuser

LED	UGR	W	Lm	V	η(%)	AxB(mm)	kg	ORDER CODE
	≤22	24	2210	24	55	Ø630x35	2	90419.L630.0
	≤22	38	3510	24	53	Ø950x35	3	90419.L950.0
	≤19	51	4810	24	55	Ø1270x35	4	90419.L127.0
	≤19	64	5980	24	52	Ø1555x35	5	90419.L155.0
	-	82	7670	24	-	Ø1970x35	6	90419.L197.0

Note:
To complete the product add ceiling rose. Please order separately. Suspension kit is included in the product (1,5 m).
In versions Ø1555mm and Ø1970mm, the product includes the transparent current supply cable.
In the option TW and RGBW, the product mandatorily includes the transparent current supply cable.

Example code for order: 90419.L630.0 (ORDER CODE) + W(COLOUR/FINISH) + R000 + 9763(OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

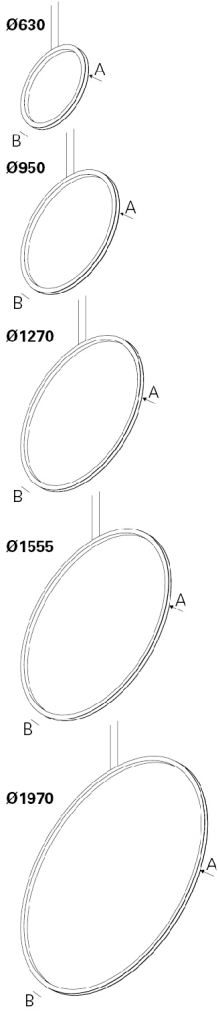
COLOUR / FINISH		DIMENSIONS	
Code	Description		
W	White		Trimless ceiling rose 50 Ø120 Ø128
G	Grey		Recessed ceiling rose 82 Ø150 Ø128
B	Black		Surface ceiling rose for Ø630/Ø950/Ø1270 270 135 44
U	Blue		Surface ceiling rose for Ø1555/Ø1970 320 145 44
V	Green		
T	Yellow		
K	Red		
N	Jungle		
D	Golden eye		
O	Sahara		
L	Autumn		
R	Rusty chain		
C	Pure chocolate		
1	Mist		
9	Dark rock		
I	Carbon		

OPTIONS


Colour temperature		Surface ceiling rose	
	2700K	HF	Order code
	3000K	DALI	9761
	Tunable White (3000K - 5700K)	OmniaControl (Voice/App)	9762
	RGB White (2700K)		9763
	• TW and RGBW are only available with OmniaControl.	• To complete this option, please add ceiling rose colour.	
Recessed ceiling rose		Trimless ceiling rose	
	HF	HF	Order code
	DALI	DALI	9767
	OmniaControl (Voice/App)	OmniaControl (Voice/App)	9768
	• To complete this option, please add ceiling rose colour.	• To complete this option, please add ceiling rose colour.	9769

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.


PHOTOMETRY




OREO V Out Ø630mm
bLINE 4000K



OREO V Out Ø950mm
bLINE 4000K



OREO V Out Ø1270mm
bLINE 4000K



OREO V Out Ø1555mm
bLINE 4000K

TO SPECIFY:

Circular LED luminaire, for vertical suspension. Extruded aluminium body with 35x35 mm, epoxy polyester powder-coated. Available in 5 sizes (Ø630, 950, 1270, 1555 and 1970mm), with bLINE diffuser, opal polycarbonate clip-in diffuser. With outward light. Standard version in 4000K LED, CRI>90, 60.000h lifetime (@L80, B10, Ta 25 C) and without any visible power-supply cable. Ceiling rose available as recessed mounted with trim or trimless, or surface mounted, in on/off, dimmable DALI or with OmniaControl. 2700K, Tunable White and RGB White available as options. Available in 16 different colours. – as Roxo Lighting OREO V OUT.