
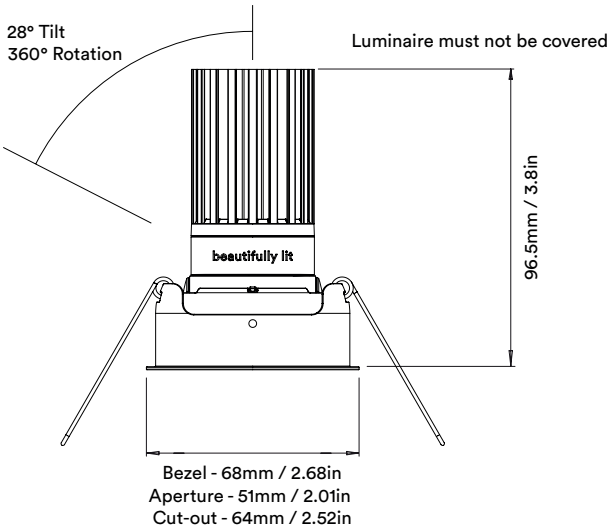


infinity midi adjustable  
zero high output

installation

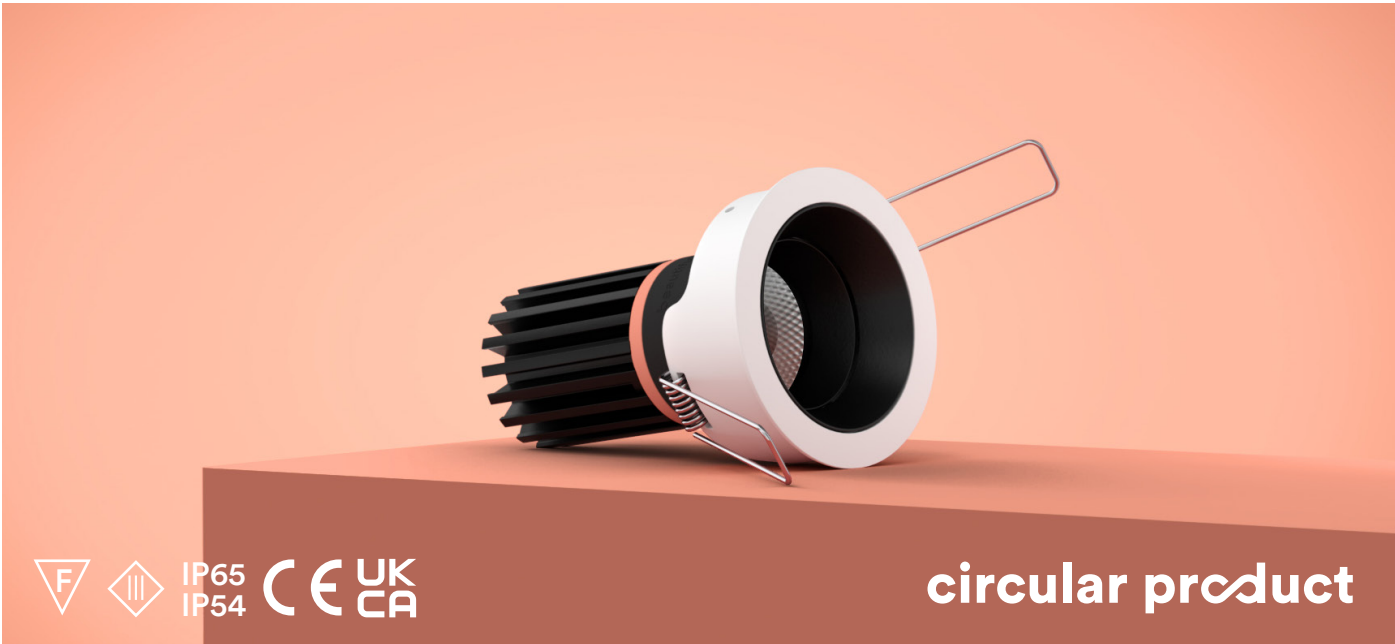

How to Install

- Cut hole in ceiling as per above cut-out;
- Wire luminaire cable to Orluna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Bend back mouse trap springs and feed luminaire into cut-out pushing the light fitting fully up into the ceiling. Ensure Ø250mm around luminaire and driver is left clear of insulation.

Luminaire Details

|                       |                    |              |                 |
|-----------------------|--------------------|--------------|-----------------|
| Cut-out               | Ø64mm              | Class        | III             |
| Recess Depth          | 97mm               | IP Rating    | IP54/IP65       |
| Clearance             | Ø250mm             | IP Zone      | Zone 1          |
| Fixing Method         | Mouse Trap springs | Material     | Aluminium ADC12 |
| Min Ceiling Thickness | 1mm                | Cable type   | 2 Core 0.75mm²  |
| Max Ceiling Thickness | 28mm               | Cable Length | 300mm           |
| Max Driver Distance   | 20m                | Bezel Temp   | F Rated         |