


Project Name

Qty

Type

Catalog / Part Number

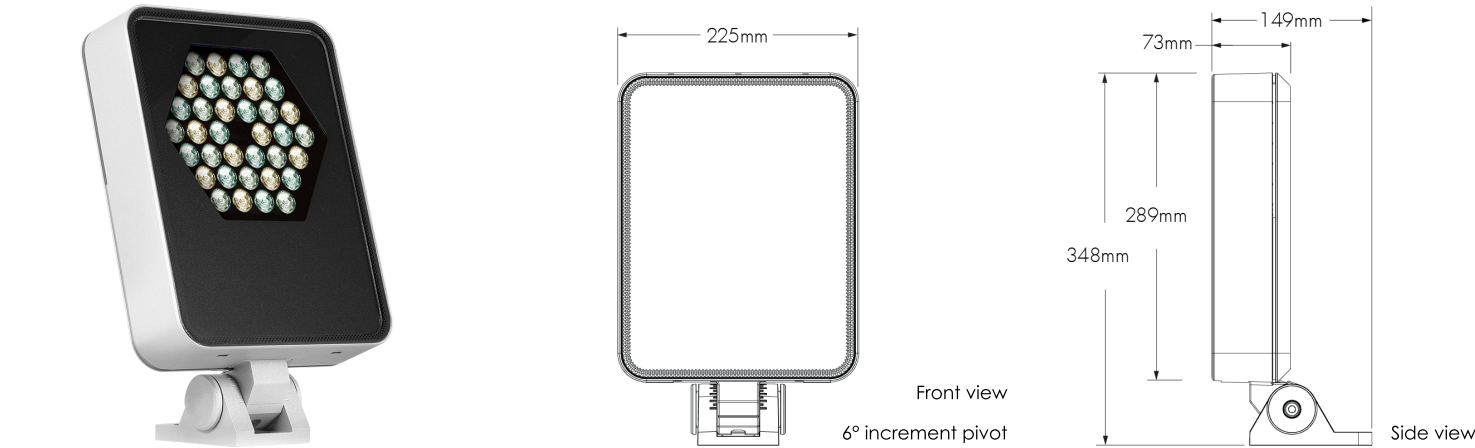

Photometric Summary

Symmetric


	Delivered output (lm)	Intensity (peak cd)
VN (6°)	3,335	173,787
NS (10°)	3,570	126,603
NF (20°)	3,522	33,089
M (30°)	3,233	14,616
FL (40°)	3,037	7,496
WFL (60°)	2,525	2,622

Asymmetric

	Delivered output (lm)	Intensity (peak cd)
NAS	3,711	57,155 (@2.5°)
WW	3,071	13,650 (@5°)

Based on DWH configuration (full output), DMX/RDM. Photometric performance is measured externally in compliance with IESNA LM-79-24. Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Optic

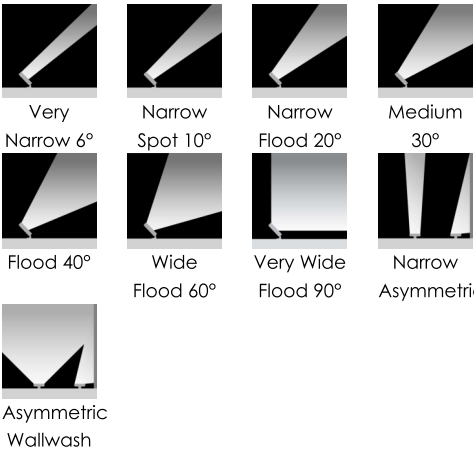

Description

The Lumenquad Large Dynamic White, 50W LED luminaire, has a sleek 73 mm profile with no visible wiring or hardware and seamlessly integrates with any architecture. Its Dynamic White feature enables smooth variations in colour temperature, from 2200K to 3000K or from 2700K to 6500K, and gives you the freedom to update the colour of light in response to the way a space is used. Lumenpulse's latest generation of LED boards possess an optimised candela and lumens recipe for both Narrow and Wide optics. The Lumenquad Large Dynamic White is the epitome of versatile and can be configured with numerous options including optics for wallwash and floodlighting, as well as various mounting options, accessories, controls, and multiple standard finishes.

Features

Colour and Colour Temperature	Dynamic Warm White (2200K to 3000K), Dynamic White (2700K to 6500K)
Optics (Nominal Distribution)	VN (6°), NS (10°), NF (20°), M (30°), FL (40°), WFL (60°), VWFL (90°), NAS (Narrow Asymmetric), WW (Asymmetric Wallwash)
Mounting Options	Surface Mount Wall Mount Bracket with Decorative Cover Wall Mount Bracket without Decorative Cover Recessed JBOX Wall Mount with Decorative Cover Recessed JBOX Wall Mount Without Decorative Cover Pole Mount Tenon Mount Stake Mount All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.
Optical Options (Factory Installed)	Linear Spread Lens Horizontal Distribution, Linear Spread Lens Vertical Distribution, Honeycomb Louver
Option	Corrosion-Resistant Coating for Hostile Environments
Power Consumption	50 W (LT and DMX/RDM control), 43 W (DIM/DTW and DMX/RDM1 control)
Warranty	5-year limited warranty

Colour and Colour Temperature



Dynamic Warm White
(2200K to 3000K)



Dynamic White
(2700K to 6500K)

Control

DIM/DTW

DMX/RDM1

DMX/RDM





Ratings

IP66 IK10

Certifications











Performance

Maximum Delivered Output	2,872 lm (DWW full output, NAS, DMX/RDM) 3,711 lm (DWH full output, NAS, DMX/RDM)
Maximum Delivered Intensity	134,511 cd at nadir (DWW full output, VN 6°, DMX/RDM) 173,787 cd at nadir (DWH full output, VN 6°, DMX/RDM)
Illuminance at Distance	Minimum 1 lx at 368 m (DWW full output, VN 6°, DMX/RDM) Minimum 1 lx at 419 m (DWH full output, VN 6°, DMX/RDM)
Lumen Maintenance	L70 B50 120,000 hrs (Ta 25 °C)

Physical

Housing Material	Low copper content high pressure die-cast aluminium
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	6.8 kg
EPA	Front = 0.08 m², Side = 0.02 m², Front 45°= 0.07 m²

Electrical and Control

Voltage	100 to 277 volts
Fixture Cable	Power and data in one cable
Conductors	3C: 3 x 1,5 mm ² (LT control) 5C: 5 x 1,5 mm ² (DIM/DTW control) 6C: 3 x 1,5 mm ² / 3 x 0,20 mm ² (DMX/RDM1, DMX/RDM control)
Inrush Current (Peak)	55A @230VAC
Control	Lumentalk, Dim to Warm via 1-10V (2700K to 2200K), Dim to Warm via Single-Channel DMX/RDM (2700K to 2200K), DMX/RDM Enabled 3-Channel Colour Temperature Control, DALI 2 T8 Control
Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit
Dynamic Warm Colour Temperature Mixing	36 LEDs (12x 2200K, 12x 2700K, 12x 3000K)
Dynamic White Colour Temperature Mixing	36 LEDs (12x 2700K, 12x 4000K, 12x 6500K)

Environmental

Storage Temperature	-40 °C to 85 °C (device must reach start-up temperature value before operating)
Start-up Temperature	-25 °C to 50 °C
Operating Temperature	-40 °C to 50 °C
Ingress Protection Rating	IP66
Impact Resistance Rating	IK10


Accessories (Order Separately)

Optical Accessories	Snoot, Lumenquad Large Visor, Linear Spread Lens Adjustable, Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)


Control Systems	Lumenscene™ (LSC), Pharos® Lighting Control Kit (PHAROS)
Diagnostic and Addressing Tools	LumenID (LID)

Chromaticity Data


TM-30 - DWW




DWW Spectral Power Distribution

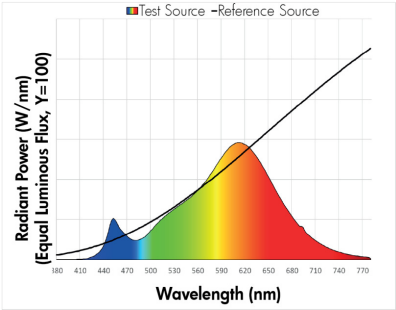

TM-30 - DWH




DWH Spectral Power Distribution

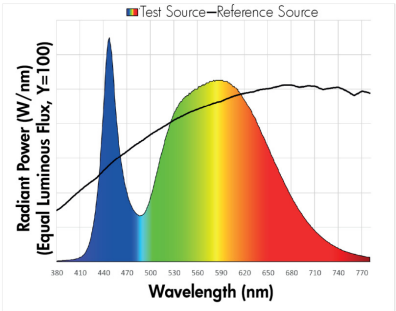


Mounting Options

SM - Surface Mount

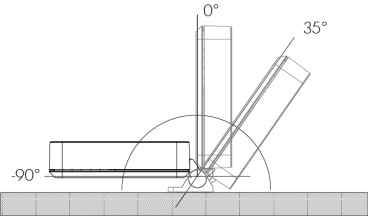


SM - Mounting Hole Pattern

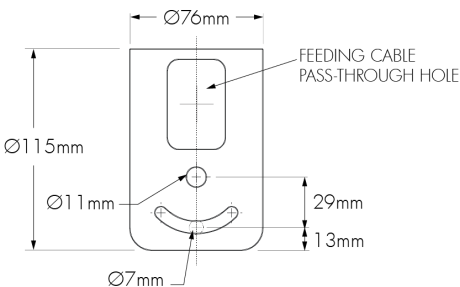


The SM mounting option cannot be interchanged with any other mounting option. All others mountings are interchangeable. Consult factory for details.

WM - Wall Mount Bracket with Decorative Cover




WMNC - Wall Mount Bracket Without Decorative Cover

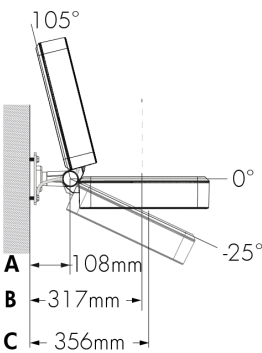


- A - Dimension from wall to pivot.
- B - Dimension from wall to the geometric center of the fixture.
- C - Dimension from wall to the center of the board.

WAM - Wall Mount Bracket With Decorative Cover
152 mm, 305 mm, 457 mm or 610 mm

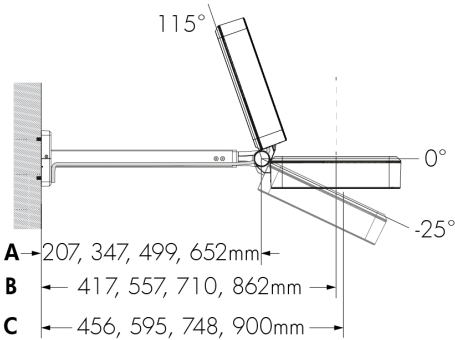


WAMNC - Wall Mount Bracket Without Decorative Cover
152 mm, 305 mm, 457 mm or 610 mm

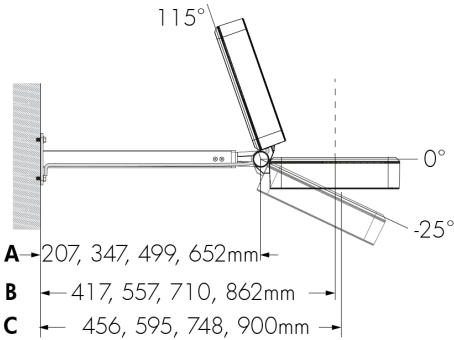


A cable length of 3 m or greater must be specified for the WAM24 mounting option.

A cable length of 3 m or greater must be specified for the WAM24 mounting option.

WMRJB - Recessed JBOX Wall Mount With Decorative Cover




WMRJBNC - Recessed JBOX Wall Mount Without Decorative Cover




Fixture cable length is determined by Lumenpulse.

Fixture cable length is determined by Lumenpulse.

WAMRJB - Recessed JBOX Wall Arm Mount With
Decorative Cover 152 mm, 305 mm, 457 mm or
610 mm

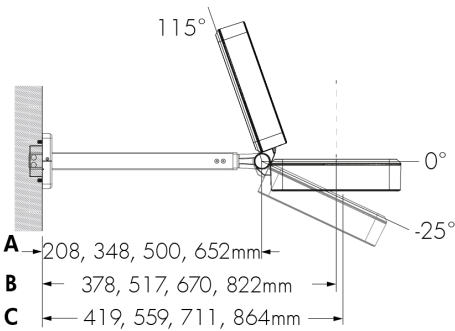


WAMRJBNC - Recessed JBOX Wall Arm Mount
Without Decorative Cover 152 mm, 305 mm,
457 mm or 610 mm

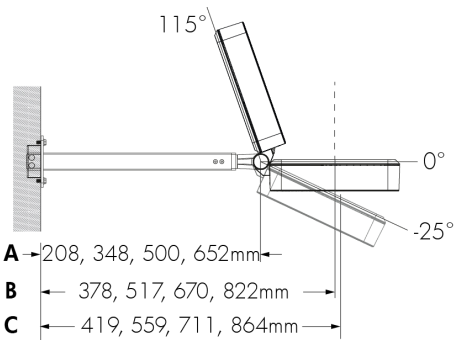


- A - Dimension from wall to pivot.
- B - Dimension from wall to the geometric center of the fixture.
- C - Dimension from wall to the center of the board.


Wall Mount Horizontal Pivot Limits




WM, WAM, WMRJB and WAMRJB - Mounting Hole
Pattern

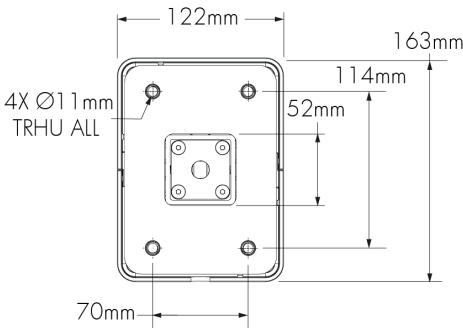

WMNC, WAMNC, WMRJBNC and WAMRJBNC -
Mounting Hole Pattern

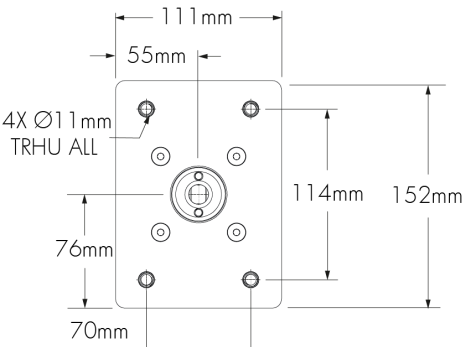


RPM4/1, RPM4.5/1, RPM5/1 - Round Pole Mount

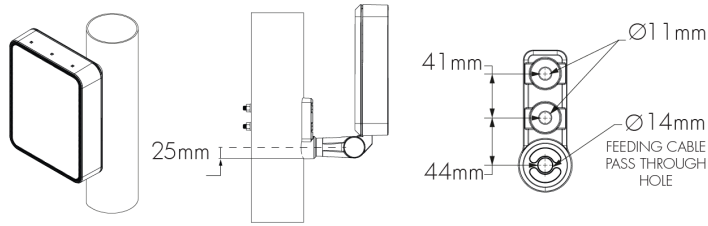


	RPM4/1	RPM4.5/1	RPM5/1
For pole Ø	101.6mm ± 1.6mm	114.3mm ± 1.6mm	127mm ± 1.6mm
Bolt length	133mm	146mm	159mm

Consult factory for other pole diameters.
Hardware included with accessory.

Round Pole Mount Horizontal Pivot Limits

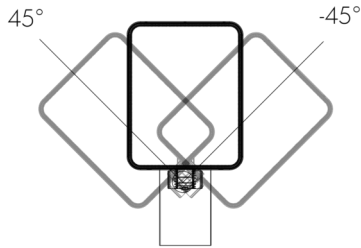


TN2 - Tenon Adapter For 60 mm O.D. Pole

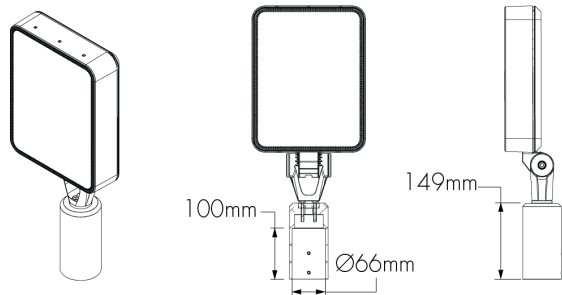

Vertical mounting only. Consult factory for horizontal mounting.

RPM4/2, RPM4.5/2, RPM5/2 - Round Pole Mount For Two Fixtures

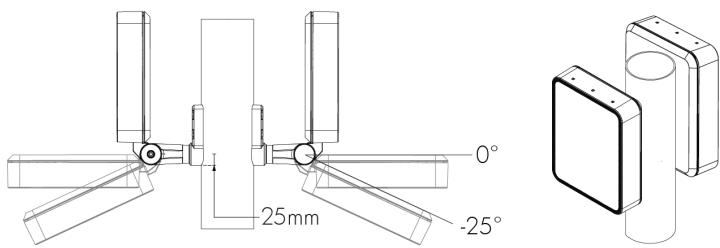


	RPM4/2	RPM4.5/2	RPM5/2
For pole Ø	101.6mm ± 1.6mm	114.3mm ± 1.6mm	127mm ± 1.6mm
Bolt length	146mm	159mm	178mm


Consult factory for other pole diameters.
Hardware included with accessory.

All mounting options (except for SM mounting) are interchangeable. Consult factory for details.
All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

TN4 - Tenon Adapter For 102 mm O.D. Pole

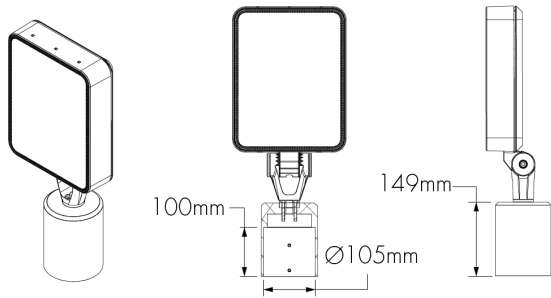

SK - Stake Mount

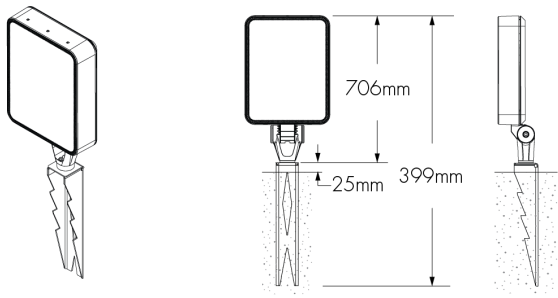


Vertical mounting only. Consult factory for horizontal mounting.

All mounting options (except for SM mounting) are interchangeable. Consult factory for details.
All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

Optical Options

LSLH - Linear Spread Lens Horizontal Distribution
LSLV - Linear Spread Lens Vertical Distribution

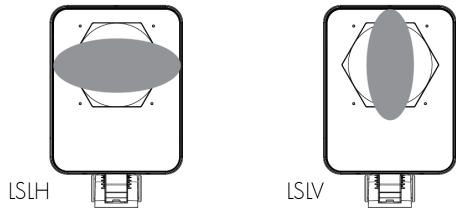


Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.

See 'Optical Accessories' section for field adjustable spread lens (LSLA).

	Beam angle with LSLH/LSLV
VN	7° x 60°
NS	13° x 60°
NF	18° x 65°
M	25° x 66°
FL	35° x 70°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

HL - Honeycomb Louver



Factory installed, not adjustable on site. HL not available for WFL, VWFL, NAS and WW optics.


The addition of a honeycomb louvre will affect beam distribution. Consult factory for application support.

LLF: 0.90*
*LLF may vary slightly by distribution chosen.

Optical Accessories (Factory Installed, Order Separately)


Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.

SN - Snoot

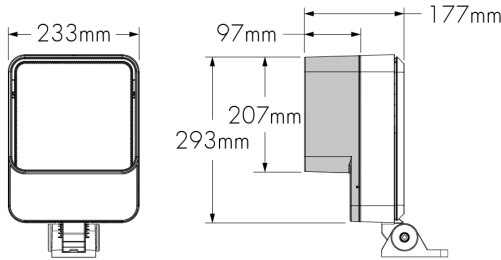

LQLSN-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


VS - Visor

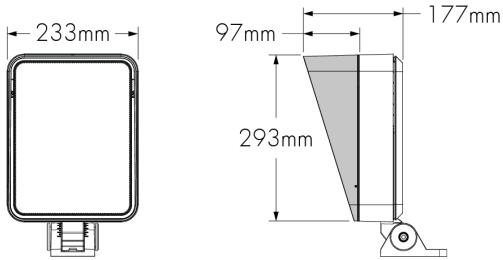

LQLVS-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


The Visor is not recommended for the WW optic.

LSLA - Linear Spread Lens Adjustable

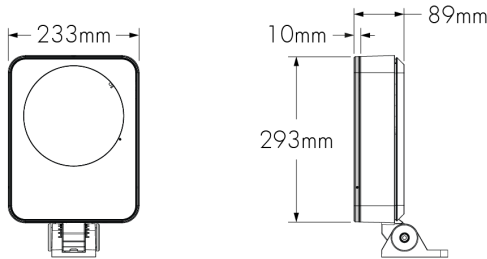

LQLLSLA-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

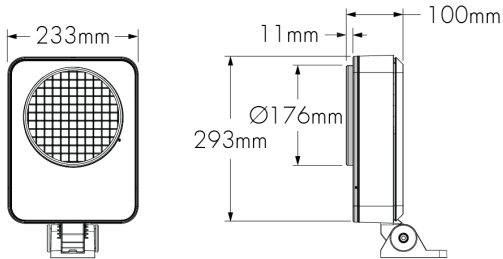

LQLWG-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

	+	Snoot	Visor	Wire guard
Linear spread lens adjustable		YES	YES	NO
Wire guard		YES	YES	N/A

Accessory combinations must be ordered together on a single line. Ex: A snoot + wire guard combination order code is LQLSNWG-BK-BK. A maximum of two accessories can be combined per fixture.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147707

Diffuser Lens 2 (2 Notches)




147708

Diffuser Lens 3 (3 Notches)




147709

Diffuser Lens 4 (4 Notches)




147710

Diffuser Lens 5 (5 Notches)



147711

Diffuser Lens 6 (6 Notches)



147712

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)						
FL (40°)						
WFL (60°)						
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LQS:** LQALK-S **LQM:** LQALK-M **LQL:** LQALK-L **LQG:** LQALK-G

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LQS:** LQSLSLA-FINISH-LQALK **LQM:** LQMLSLA-FINISH-LQALK **LQL:** LQLLSLA-FINISH-LQALK **LQG:** LQGSLSLA-FINISH-LQALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


EPA Guide

	FIXTURE			MOUNTING OPTIONS*			
	LQL	LQL with Snoot	LQL with Visor	WAM/WAMRJB			
					6	12	18
EPA Front (m²)	0.078	0.093	0.093	N/A	N/A	N/A	N/A
EPA Side (m²)	0.021	0.055	0.055	0.012	0.027	0.041	0.055
EPA Front 45° (m²)	0.073	0.117	0.117	N/A	N/A	N/A	N/A

*Mounting arm only. Fixture EPA calculation must also be considered.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

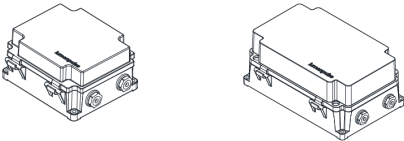

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

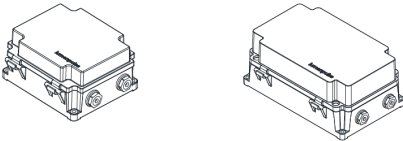

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Control Systems (Order Separately)

Lumenscene



The Lumenscene, a user-friendly DMX/RDM lighting controller that includes eight preconfigured scene changes and can be programmed via RDM.

PHAROS - Pharos® Kit



The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.


Typical Wiring Diagrams

Wiring Colour Code

CE Colour Code	USE
Yellow/Green	Ground
Brown	Line 100-277V AC
Blue	Line/Neutral
Black	1-10V / Data +
Grey	1-10V / Data -
Grey	Signal common (DMX/RDM only)


CE Class II Colour Code	USE
Brown	Line 100-277V AC
Blue	Line/Neutral
Black 1	Signal common (DMX/RDM only)
Black 2	1-10V / Data +
Grey	1-10V / Data -

Dim to Warm Via 1-10V (DIM/DTW*)
*Available For DWW Version Only, 2700K To 2200K

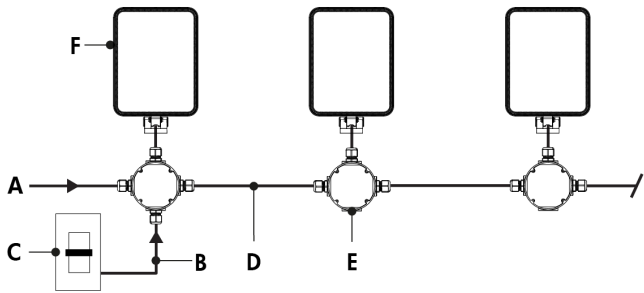


- A - Power input (100-277V, wiring by others)
- B - Data wiring (by others)
- C - Dimmer (by others)
- D - Power and data wiring (by others)
- E - Junction box (by others)
- F - Lumenquad Large

Dim To Warm Via 1-10V (DIM/DTW) - Wiring Detail - CE

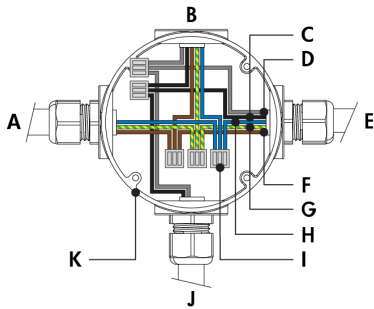

- A - Power input or from previous fixture
- B - To fixture
- C - 1-10 V +
- D - 1-10 V -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


Dim To Warm Via 1-10V (DIM/DTW) - Wiring Detail - CE Class II

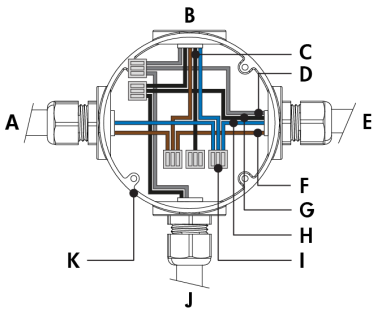

- A - Power input or from previous fixture
- B - To fixture
- C - Signal common (black 1)
- D - 1-10 V -
- E - To next fixture
- F - Line
- G - 1-10 V + (black 2)
- H - Neutral
- I - Terminal connector (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 1-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 43 watts per fixture.

Star Layout (Dim to Warm Via DMX/RDM1* or 3-Channel DMX/RDM)
*Available For DWW Version Only, 2700K To 2200K

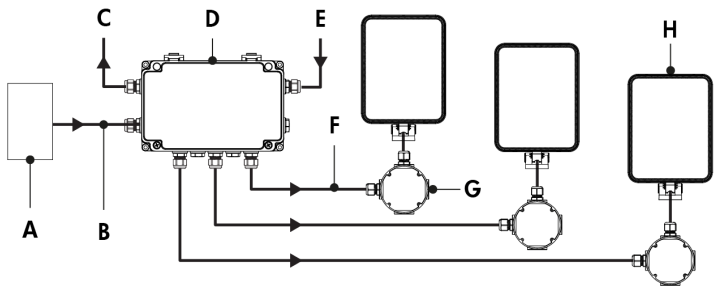

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenquad Large

Star Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail - CE




- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Maximum Fixture Count

Maximum number of fixtures per run (Based on 16A maximum, 1,5mm ² cable, fixtures spaced 3m on center, first fixture 1.5m from CBX)				
Configuration/Voltage	120V	208V	240V	277V
LQL	18	28	32	32

DMX/RDM1 controlled fixtures typically draw less power than DMX/RDM controlled fixtures, consult factory for maximum run length information.

Star Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail - CE Class II




- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Signal common (black 1)
- F - Neutral
- G - Data + (black 2)
- H - Line
- I - Terminal connector (by others)
- J - Junction box (by others)

- Refer to CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- DMX/RDM1 control option requires 1 DMX address. DMX/RDM control option requires 3 DMX addresses.
- 43 watts per fixture for DMX/RDM1 control, 50 watts per fixture for DMX/RDM control.


* DMX terminator is required at the end of each run to maintain data integrity. (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.

Daisy Chain Layout (Dim To Warm Via DMX/RDM1* or 3-Channel DMX/RDM)
*Available For DWW Version Only, 2700K To 2200K

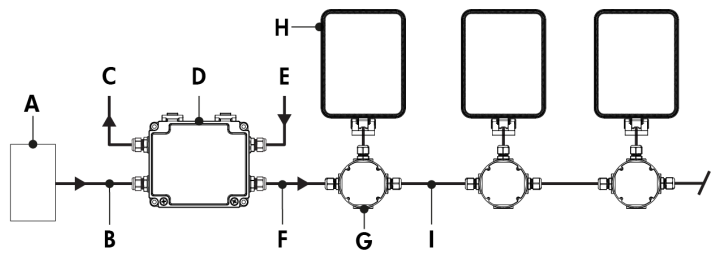

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenquad Large
- I - Power and data wiring (by others)

Daisy Chain Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail (First or Middle of Run) - CE

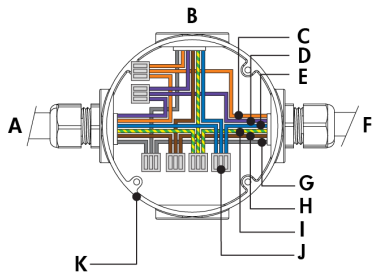


- A - From CBX or previous fixture
- B - To fixture
- C - Data -
- D - Data +
- E - Neutral
- F - To next fixture
- G - Signal common
- H - Line
- I - Ground
- J - Terminal connector (by others)
- K - Junction box (by others)

Maximum Fixture Count

Maximum number of fixtures per run (Based on 1.6A maximum, 1,5mm ² cable, fixtures spaced 3m on center, first fixture 1.5m from CBX)				
Configuration/Voltage	120V	208V	240V	277V
LQL	18	28	32	32


DMX/RDM1 controlled fixtures typically draw less power than DMX/RDM controlled fixtures, consult factory for maximum run length information.

Daisy Chain Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail (End of Run) - CE




- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail (First or Middle of Run) - CE Class II

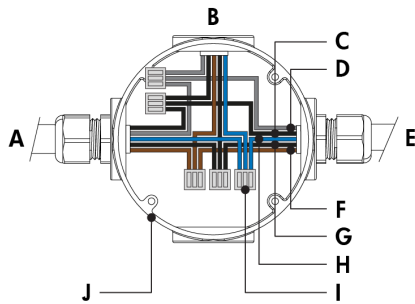

- A - From CBX or previous fixture
- B - To fixture
- C - Signal common (black 1)
- D - Data -
- E - To next fixture
- F - Line
- G - Data + (black 2)
- H - Neutral
- I - Terminal connector (by others)
- J - Junction box (by others)

Daisy Chain Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail (End of Run) - CE Class II

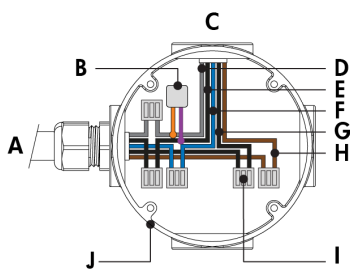


- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Signal common (black 1)
- F - Neutral
- G - Data + (black 2)
- H - Line
- I - Terminal connector (by others)
- J - Junction box (by others)

- Refer to CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 0.9 m cable length between fixture and next junction box for daisy chain layout.
- DMX/RDM1 control option requires 1 DMX address. DMX/RDM control option requires 3 DMX addresses.
- 43 watts per fixture for DMX/RDM1 control, 50 watts per fixture for DMX/RDM control.


* DMX terminator is required at the end of each run to maintain data integrity. (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.

DALI 2 T8 (DALIT8)

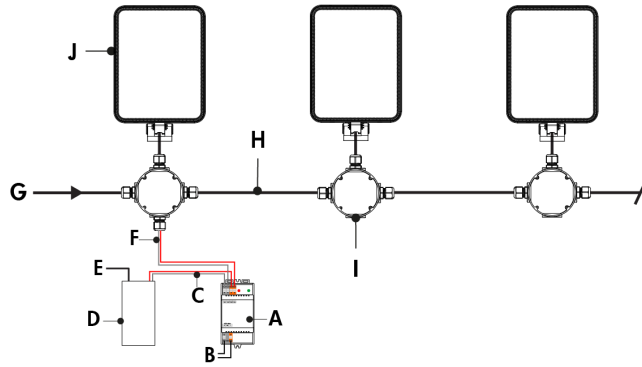

- A** - DALI bus power supply
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (by others)
- D** - DALI controller (by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - Data output to fixture
- G** - Power input (100-277V)
- H** - Power and data wiring (by others)
- I** - Junction box (by others)
- J** - Lumenquad (LQL-DALIT8)

DALI 2 T8 (DALIT8) - Wiring Detail

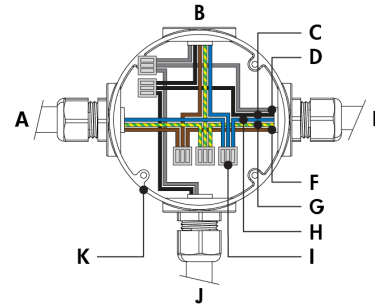

- A** - Power input or from previous fixture
- B** - To fixture
- C** - DA +
- D** - DA -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Terminal connector (by others)
- J** - From DALI controller (by others)
- K** - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- 100 watts per fixture.
- The Lumenquad Large responds to RGBWAF controls.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.

How to Order

Housing	Voltage	Colour and Colour Temperature	Optic	Optical Option ⁽³⁾	Mounting Options ^{(5) (4) (7)}	Finish	Control	Option	Certification	Cable Length ^{(15) (19) (21)}
LQL Lumenquad Large	100 100 Volts	DWW Dynamic Warm White (2200K to 3000K) DWH Dynamic Warm White (2700K to 6500K) M Medium 30° ⁽¹⁾ FL Flood 40° ⁽¹⁾ WFL Wide Flood 60° ⁽¹⁾ VWFL Very Wide Flood 90° ^{(1) (2)} NAS Narrow Asymmetric ⁽¹⁾ WW Asymmetric Wallwash ⁽¹⁾	VN Very Narrow 6° ⁽¹⁾	LSLH Linear Spread Lens Horizontal Distribution ⁽⁴⁾ LSLV Linear Spread Lens Vertical Distribution ⁽⁴⁾ HL Honeycomb Louver ⁽⁴⁾	SM Surface Mount	BK Black Sandtex® BRZ Bronze Sandtex® SI Silver Sandtex® WH Smooth White BKTX Textured Black BRZTX Textured Bronze Non-Metallic GRATX Textured Medium Grey GRNTX Textured Green WHTX Textured White CC Custom Colour & Finish ^{(9) (10) (11)}	LT Lumentalk ⁽¹²⁾ DIM/DTW Dim to Warm via 1-10V (2700K to 2200K) ⁽¹³⁾ DMX/RDM1 Dim to Warm via Single-Channel DMX/RDM (2700K to 2200K) ^{(13) (14) (15)} DMX/RDM 3-Channel Colour Temperature Control via DMX/RDM ^{(14) (15)} DALI T8 DALI 2 T8 Control	CRC Corrosion-Resistant Coating ^{(16) (17)} UL UL Compliant ⁽¹⁸⁾ CE CE Compliant CEII CE Compliant Class II Double Insulated	1M 1 m ^{(15) (20)} 5M 5 m 10M 10 m 15M 15 m 20M 20 m 30M 30 m	
	120 120 Volts		NS Narrow Spot 10° ⁽¹⁾		WM Wall Mount Bracket with Decorative Cover					
	208 208 Volts		NF Narrow Flood 20° ⁽¹⁾		WMNC Wall Mount Bracket without Decorative Cover					
	220 220 Volts		M Medium 30° ⁽¹⁾		WAM6 Wall Arm Mount 152 mm with Decorative Cover					
	240 240 Volts		FL Flood 40° ⁽¹⁾		WAM6NC Wall Arm Mount 152 mm without Decorative Cover					
	277 277 Volts		WFL Wide Flood 60° ⁽¹⁾		WAM12 Wall Arm Mount 305 mm with Decorative Cover					
			VWFL Very Wide Flood 90° ^{(1) (2)}		WAM12NC Wall Arm Mount 305 mm without Decorative Cover					
			NAS Narrow Asymmetric ⁽¹⁾		WAM18 Wall Arm Mount 457 mm with Decorative Cover					
			WW Asymmetric Wallwash ⁽¹⁾		WAM18NC Wall Arm Mount 457 mm without Decorative Cover					
					WAM24 Wall Arm Mount 610 mm with Decorative Cover ⁽⁸⁾					
					WAM24NC Wall Arm Mount 610 mm without Decorative Cover ⁽⁸⁾					
					WMRJB Recessed JBOX Wall Mount with Decorative Cover					
					WMRJBNC Recessed JBOX Wall Mount without Decorative Cover					
					WAMRJB6 Recessed JBOX Wall Arm Mount 152 mm with Decorative Cover					
					WAMRJB6NC Recessed JBOX Wall Arm Mount 152 mm without Decorative Cover					
					WAMRJB12 Recessed JBOX Wall Arm Mount 305 mm with Decorative Cover					
					WAMRJB12NC Recessed JBOX Wall Arm Mount 305 mm without Decorative Cover					
					WAMRJB18 Recessed JBOX Wall Arm Mount 457 mm with Decorative Cover					
					WAMRJB18NC Recessed JBOX Wall Arm Mount 457 mm without Decorative Cover					
					WAMRJB24 Recessed JBOX Wall Arm Mount 610 mm with Decorative Cover					
					WAMRJB24NC Recessed JBOX Wall Arm Mount 610 mm without Decorative Cover					
					RPM4/1 Round Pole Mount 102 mm					
					RPM4.5/1 Round Pole Mount 114 mm					
					RPM5/1 Round Pole Mount 127 mm					
					RPM4/2 Round Pole Mount 102 mm for two fixtures					
		RPM4.5/2 Round Pole Mount 114 mm for two fixtures								
		RPM5/2 Round Pole Mount 127 mm for two fixtures								

					TN2 Tenon Adapter for 60 mm O.D. Pole					
					TN4 Tenon Adapter for 102 mm O.D. Pole					
					SK Stake Mount					

Notes:

1. Factory installed, not interchangeable on site.

2. Consult factory for photometric performance.

3. Optical options are factory installed and cannot be changed in the field.

4. Not available with WFL, VWFL, NAS and WW optics.

5. All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

6. All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

7. All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

8. A cable length of 3 m or greater must be specified.

9. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colours with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colours, other RAL textures and glosses, or to match alternate colour charts. Final colour matching results may vary.

10. Setup charges apply for RAL colours. Consult factory for details.

11. Longer lead times can be expected for custom RAL colour finishes.
12. A Lumentranslator 2 (LTL2) and LumentalkID (LIDLT) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

13. Available for DWW colour temperature option only.

14. A control box (CBX) and LumenID (LID) must be specified.

15. Maximum of 1 m cable length for daisy chain DMX applications with CBX-DS.

16. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

17. Setup charges apply. Consult factory for details.

18. Consult North American specification sheets and installation instructions for UL wiring information.

19. Not applicable to WMRJB, WMRJBNC and WAMRJB 152 mm to 610 mm mounting options (with or without decorative cover). Cable lengths for these mounting options are determined by the length of the mounting bracket.

20. Not available with WAM24 or WAM24NC mounting options.

21. UL fixtures specified with a smooth white finish and a SM, WM, WMNC, or WAM 152 mm to 610 mm mounting option (with or without decorative cover) are provided with a white cable. A black cable is provided for all other fixture configurations.