


Arclux Mini
With 2 x 2 W high performance LEDs,
CRI: > 90, Colour tolerance: max. 2 SDCM
Service life: L80/B10 > 50 000 h
protection class I, IP67 , IK08
light directed by a high-end optical system,
corrosion-resistant die cast aluminium housing AlSi12,
polyester powder coated,
all exterior steel parts are stainless steel,
tempered high transmission safety glass,
silicon gasket, 4 drilled holes Ø 6 mm,
spacing 200 x 88 mm, M20 cable glands,
integral driver (AC/DC)


Arclux Mini					
Part number*	Colour	Light source	Luminous flux	Main beam angle γ	
8 373 046 009	black	2 x LED 2 W warm white (3000 K)	161 lm	C 0 – 180	C 90 – 270
8 373 066 009	white			6°	180°
8 373 056 009	silver grey				
Part number*	Colour	Light source	Luminous flux	Main beam angle γ	
8 373 045 009	black	2 x LED 2 W neutral white (4000 K)	179 lm	C 0 – 180	C 90 – 270
8 373 065 009	white			6°	180°
8 373 055 009	silver grey				
Part number*	Colour	Light source	Luminous flux	Main beam angle γ	
8 373 043 009	black	2 x LED 2 W blue	101 lm	C 0 – 180	C 90 – 270
8 373 063 009	white			6°	180°
8 373 053 009	silver grey				

* The luminaire can also be supplied with monochrome LEDs (amber, red, green) upon request.
DMX/DALI control with external converter

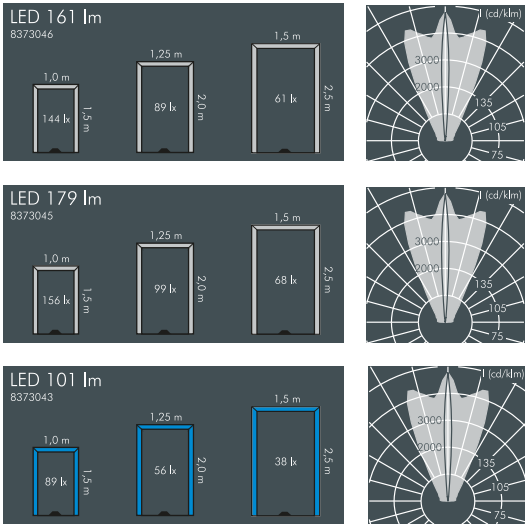

Accessories Arclux, Arclux RGBW (not for Arclux Mini)		
Part number	Colour	Description
123 0 367 940	black	Glare shield , to reduce the width of the light beam
123 0 367 960	white	
123 0 367 950	silver grey	

Part number	Colour	Description
123 0 370 000	unpainted	Mounting plate , stainless steel, for window ledges

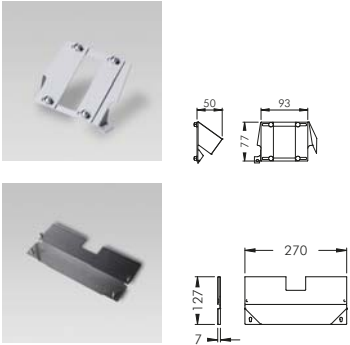

LED (see page 185)
Luminaires available in 2700 K or other colour temperatures on request

