Installation Instructions

3D Elite 16x17 RGBW **NF-ELT-3D-1617-24V-13.5W-RGBWXXX-IP67**

1. The most suitable operation temperature shall be -40℃ to 65℃.

2. Please make sure that even during installation, the predetermined bending direction will never change.

3. 3D Elite 16x17 RGBW shall not be bent sharply and it may cause product damage.


4.The maximum bending diameter:
3D Elite 16x17 RGBW: Top bending 300mm; Side bending 300mm; over bending will damage and void any warranty.


5.During the installation, the 3D Elite 16x17 RGBW can not be:
-Twisted (Non-3D product can not be twisted, 3D Elite 16x17 RGBW can be twisted within 540°)
-Dropped
-Bent at a 90°angle or bent at all
-Sagging/Hanging down


6. Please make sure the product does not stick with any paper related material directly.


7. For installation, 2 ways for your selection.
-Mounting clips
-Profile

8. Install the product into profile carefully and correctly, taking out and re-assembling will most likely cause the product damaged.

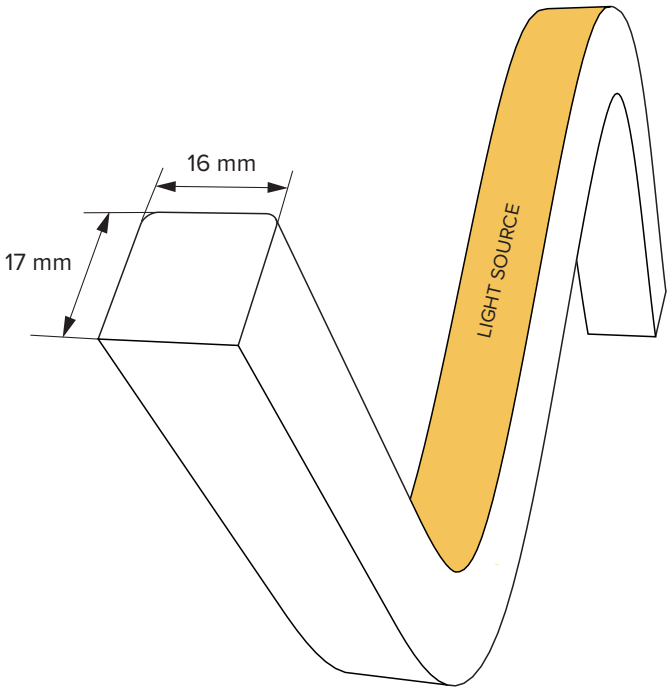










Max. twist angle
3D Elite 16x17RGBW: 540°

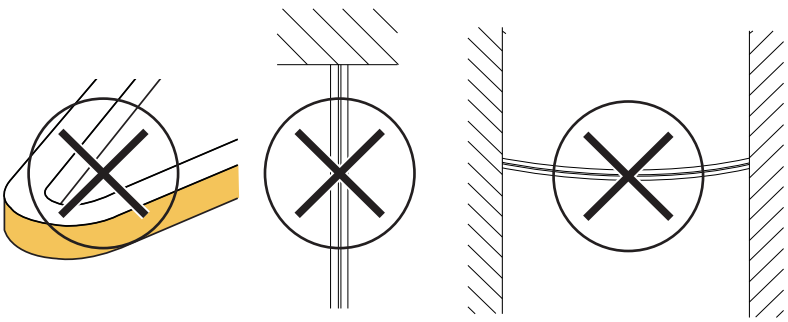



Bend too tight | Do not hang | Do not droop

Warranty: All LED light are warranted to be free from defects in product itself from the date of purchase.
Within this period, we, at its sole option, repair or replace any components which fail from correct use. Such repairs or replacement will be made at no charge to the customer for parts only, provided that the customer shall be responsible for trans-portation cost of the goods.
This warranty does not cover failures due to abuse, misuse, improper handling, act of nature, negligence, normal wear, accidental damage, modifications or repairs made by the purchaser or incorrect voltage conditions.


Installation Instructions


ONIR LINEAR & FIBRE OPTIC LIGHTING

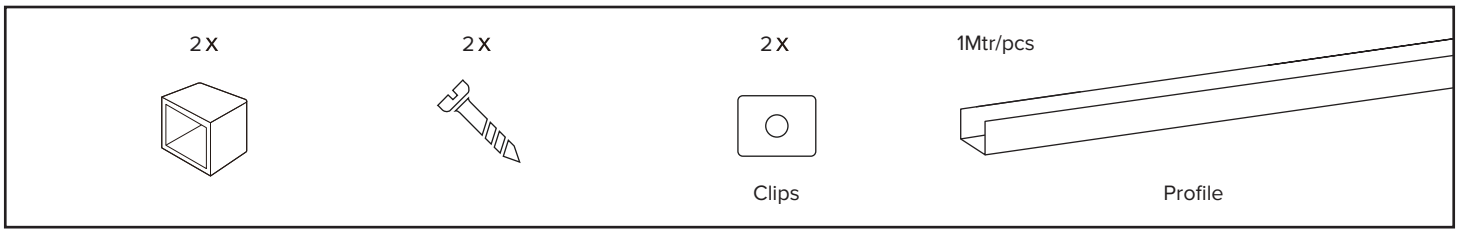

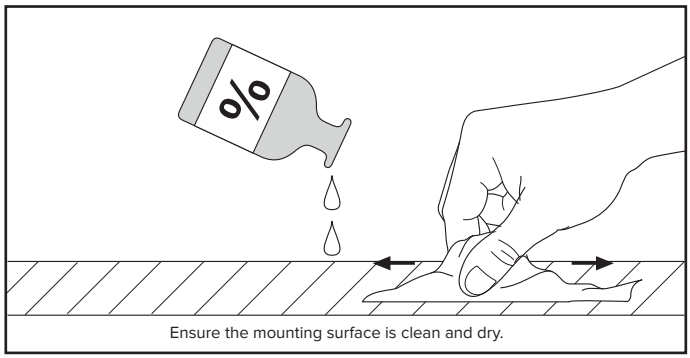


Ensure the mounting surface is clean and dry.

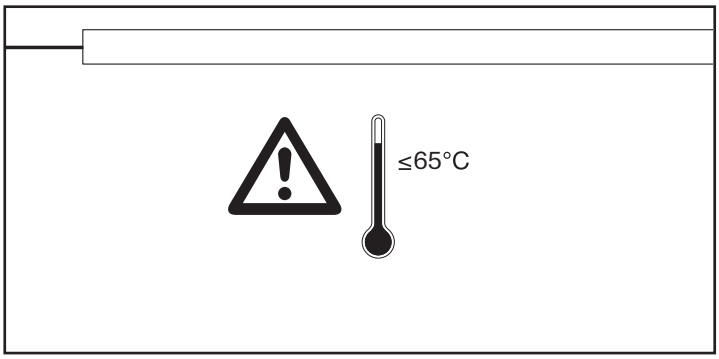


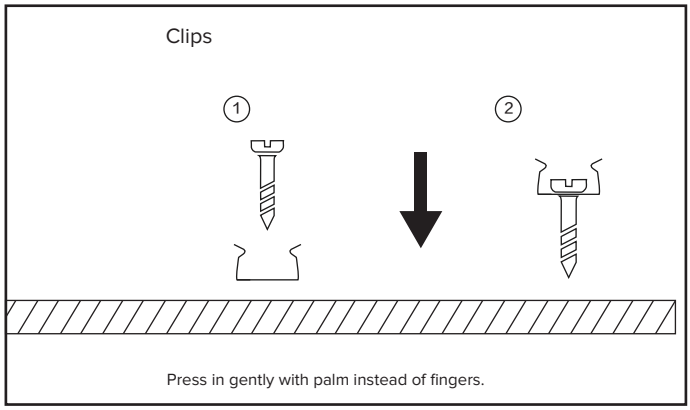


Press in gently with palm instead of fingers.

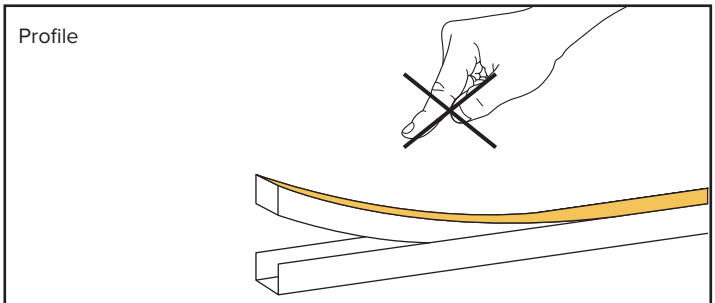

Press in gently with palm instead of fingers.

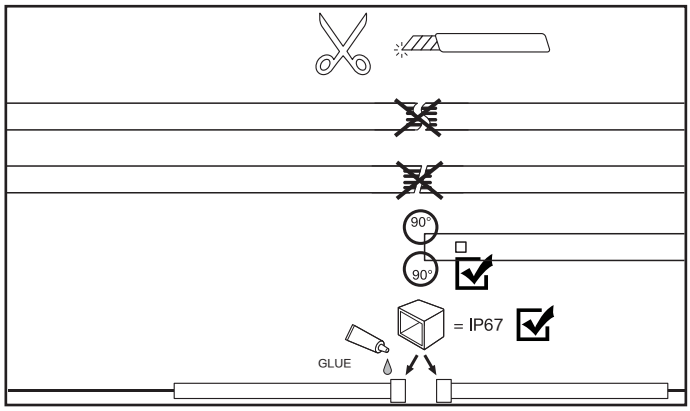

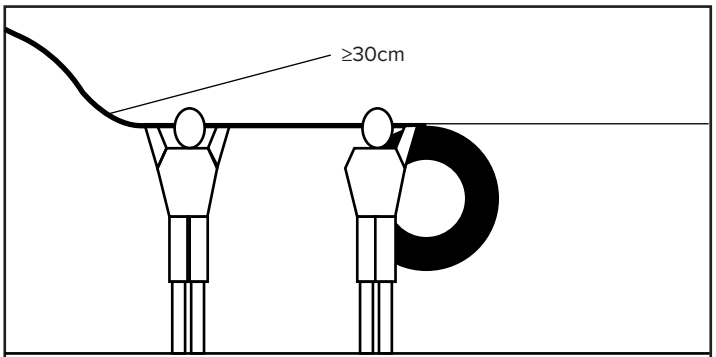

Two Person Installation

CAUTION: During removal, maintain a tilt angle of ≤ 15° when lifting the strip from the profile; excessive prying will damage the inside FPCB.

