
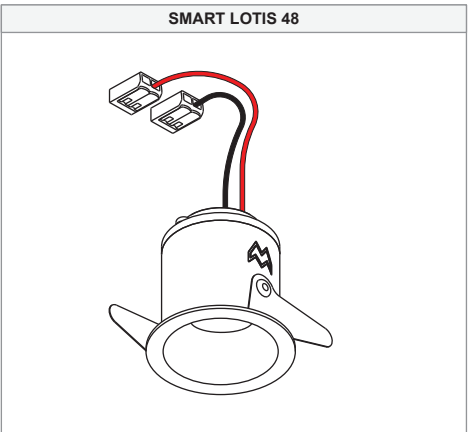
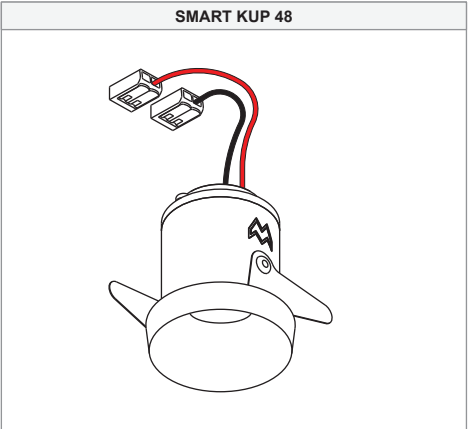


Smart Cake/Kup/Lotis 48+ IP55 LED DE

128620XX_128621XX_128622XX_128720XX_128721XX_128722XX_128820XX_128821XX_128822XX

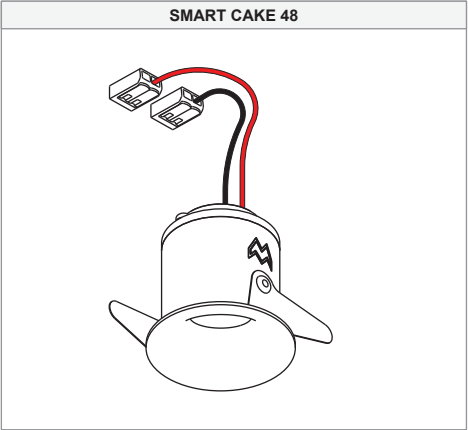

1

driver -

driver +

Ø44

gips/gypsum/gypse/gips/yeso/gesso

Ø46


hout/wood/bois/Holz/madera/legno

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	7,5	9,5	3,0
500	7,8	9,8	4,4

RED

BLACK

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

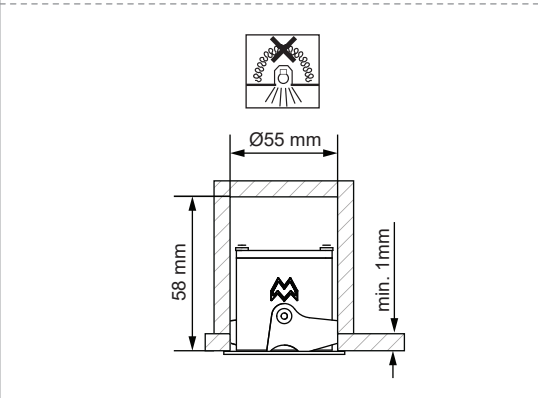

2

driver -

driver +

driver +

driver -

INSTALL

UNINSTALL

⚠ SERIAL CONNECTION:

DRIVER

Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

3

driver -

driver +

driver +

driver -

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1006610

LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.