



Smart Cake/Kup/Lotis 48 IP55 LED DE

128610XX_128611XX_128612XX_128710XX_128711XX_128712XX_128810XX_128811XX_128812XX


SMART CAKE 48




SMART KUP 48



SMART LOTIS 48




1

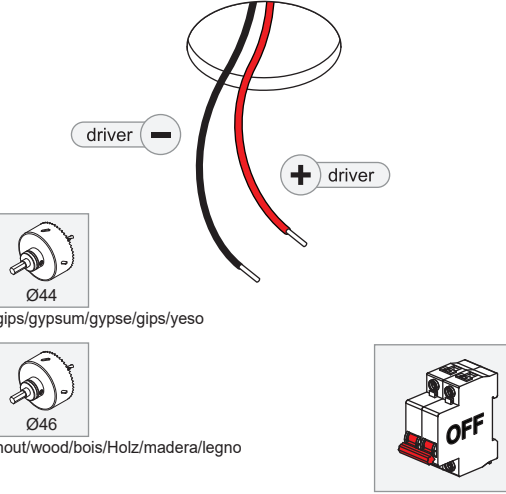


ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	2,5	3,0	1,0
500	2,5	3,0	1,4

⊕ RED ⊖ BLACK


For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.



2

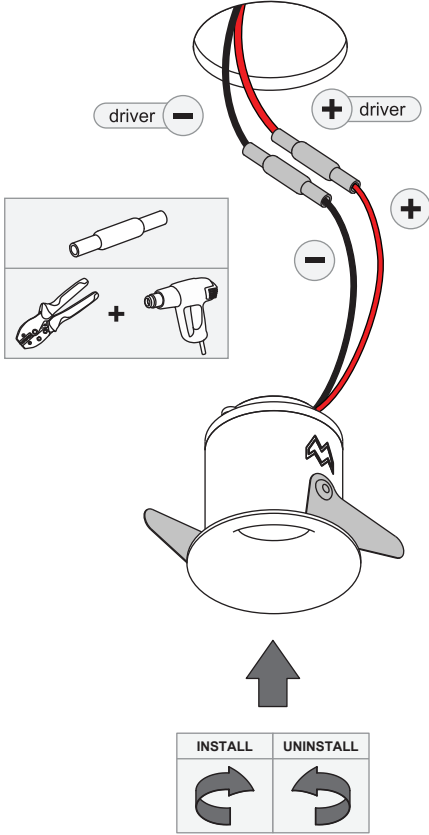



⚠ SERIAL CONNECTION:

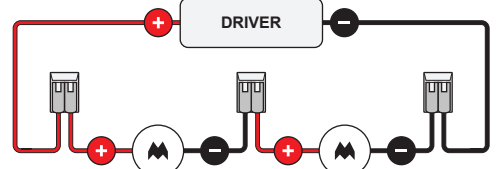


Always use a serial connection for multiple luminaires on a single driver!
Only use luminaires with the same input ratings!

3

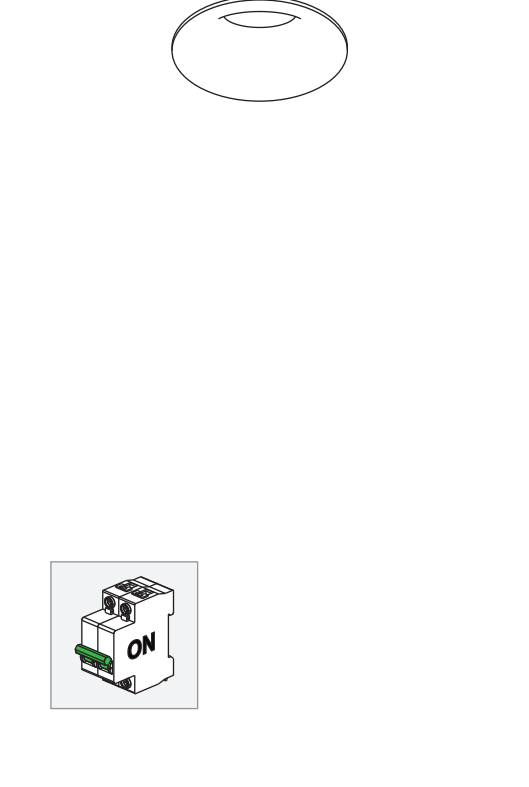




Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1006610



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

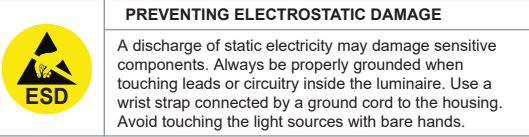

PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.