









124110XX 124111XX 124112XX 124113XX 124114XX 124115XX 124116XX 124117XX 124118XX 124410XX 124411XX 124412XX 124413XX 124414XX 124415XX 124416XX 124417XX 124418XX 124710XX 124711XX 124712XX 124713XX 124714XX 124715XX 124716XX 124717XX 124718XX

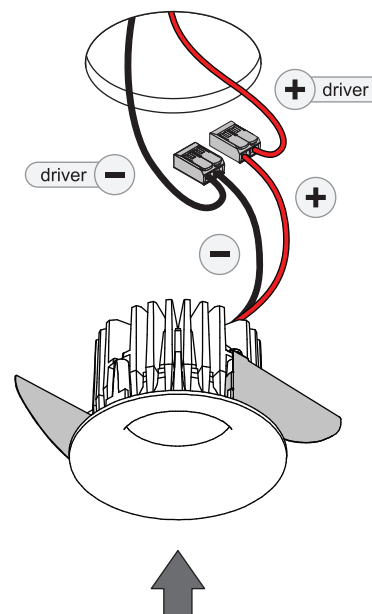

ELECTRICAL SPECS LED-FIXTURE			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	16,5	19,2	6,2
500	17,1	19,8	9,2
700	17,7	20,8	13,4
 RED		 BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			



Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

