


MEDARD RECESSED 70 / MEDARD RECESSED 70 WARM DIM

115510XX_115511XX_115512XX_115513XX_115514XX_115515XX

1

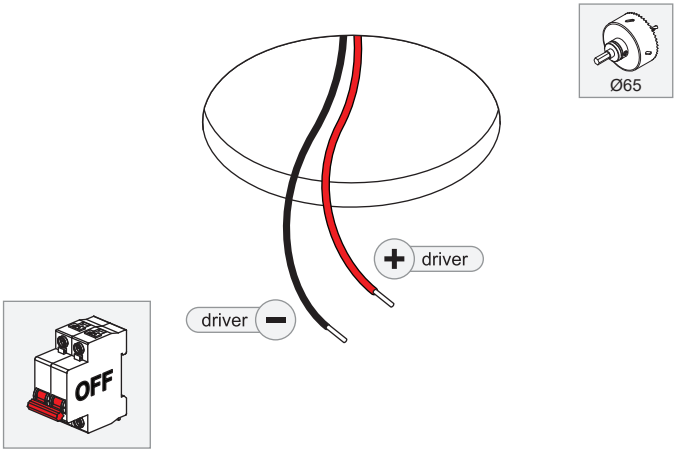

ELECTRICAL SPECS LED-FIXTURE

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	16,5	19,2	6,2
500	17,1	19,8	9,2
700	17,7	20,8	13,4
+ RED		- BLACK	



For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

WARM DIM
ELECTRICAL SPECS LED-FIXTURE



Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	30,6	37	11,8
+ RED		- BLACK	

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

2

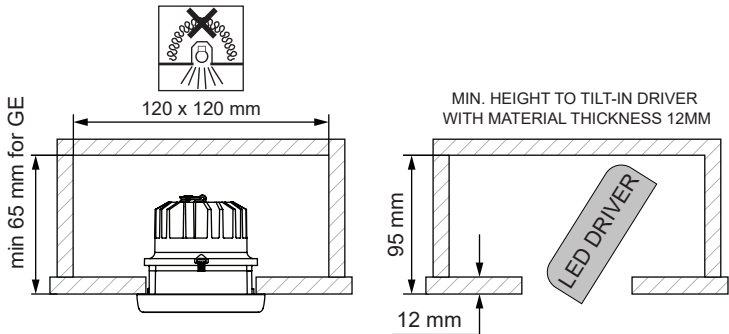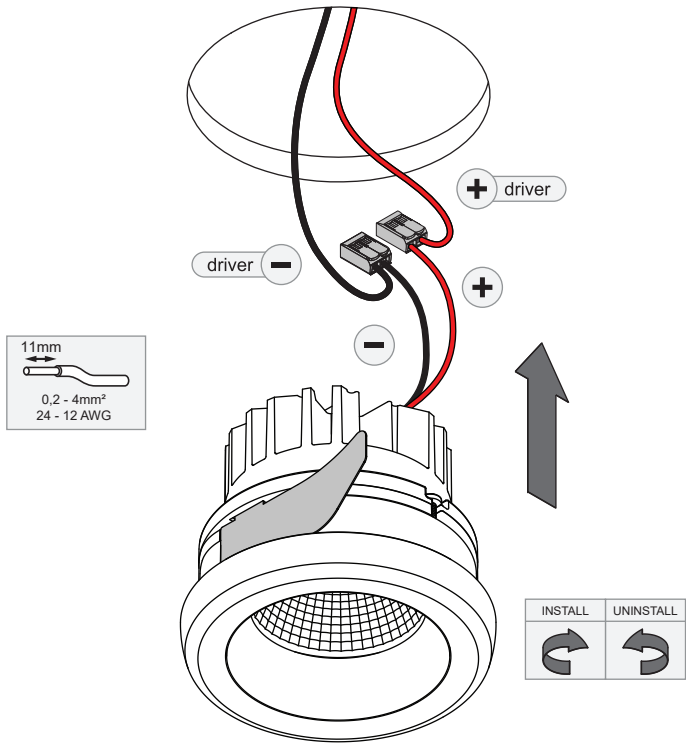

3



Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1013758



LIGHT SOURCE - DO NOT TOUCH LED

Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



PREVENTING ELECTROSTATIC DAMAGE

A discharge of static electricity may damage sensitive components. Therefore do not touch the LED nor the stripped parts of the wires with bare hands. Always be properly insulated by using ESD gloves.

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

