
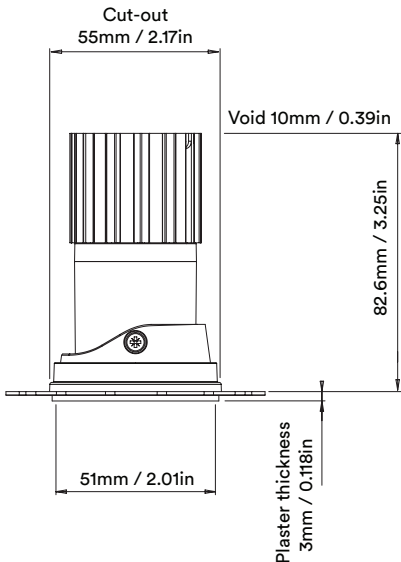


camber mini fixed  
origin  
installation

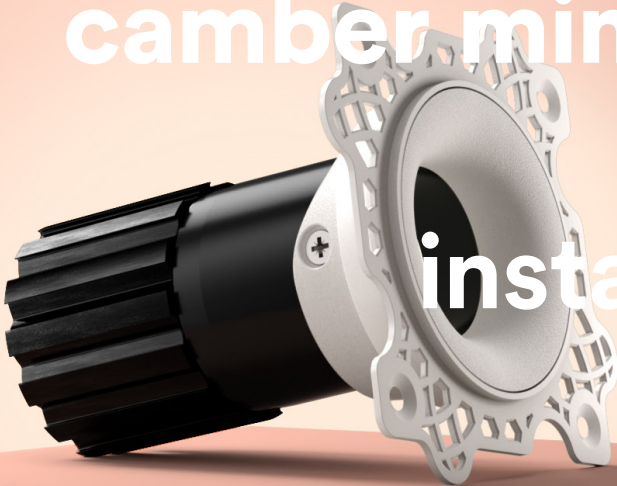

Unit height increases by  
12mm / 0.48in for SPOT and  
both ELLIPTICAL BEAMS

How to Install

- Cut hole in ceiling as per above cut-out; attach first fix plaster plate.
- Wire luminaire cable to Orluna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Press the luminaire into plaster frame, ensuring Ø250mm around luminaire and driver is left clear of insulation.

Luminaire Details

|                       |            |              |                 |
|-----------------------|------------|--------------|-----------------|
| Cut-out               | Ø55mm      | Class        | III             |
| Recess Depth          | 82.6mm     | IP Rating    | IP54/IP65       |
| Clearance             | Ø250mm     | IP Zone      | Zone 1          |
| Fixing Method         | Ball catch | Material     | Aluminium ADC12 |
| Min Ceiling Thickness | 5mm        | Cable type   | 2 Core 0.75mm²  |
| Max Ceiling Thickness | 28mm       | Cable Length | 300mm           |
| Max Driver Distance   | 20m        | Bezel Temp   | F Rated         |