

Gemini 1
With high performance LEDs,
thermal monitoring device,
CRI: > 80, Colour tolerance: max. 2 SDCM
Service life: L90/B10 > 50 000 h
protection class I, IP65 , IK08
windage area AW 0.01 m²
corrosion-resistant die cast aluminium housing AlSi12,
polyester powder coated,
all exterior steel parts are stainless steel,
tempered, high transmission safety glass,
silicon gasket, wall box: 2 drilled holes Ø 6 mm,
spacing 64 mm, one cable entry for recessed or
surface mounted cable Ø 7-10 mm,
integral driver (AC/DC)

Gemini 1, narrow beam

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 337 141 009	black	0.6 kg	2 x LED 2.5 W (5 W) warm white (3000 K)	330 lm	up	down
8 337 161 009	white				7°	7°
8 337 151 009	silver grey					

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 337 444 009	black	0.6 kg	2 x LED 2.5 W (5 W) neutral white (4000 K)	349 lm	up	down
8 337 464 009	white				7°	7°
8 337 454 009	silver grey					

Gemini 1, narrow/wide beam

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 337 142 009	black	0.6 kg	2 x LED 2.5 W (5 W) warm white (3000 K)	315 lm	up	down
8 337 162 009	white				7°	45°
8 337 152 009	silver grey					







Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 337 445 009	black	0.6 kg	2 x LED 2.5 W (5 W) neutral white (4000 K)	341 lm	up	down
8 337 465 009	white				7°	45°
8 337 455 009	silver grey					

Gemini 1, wide beam

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 337 242 009	black	0.6 kg	2 x LED 2.5 W (5 W) warm white (3000 K)	315 lm	up	down
8 337 262 009	white				45°	45°
8 337 252 009	silver grey					

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 337 545 009	black	0.6 kg	2 x LED 2.5 W (5 W) neutral white (4000 K)	341 lm	up	down
8 337 565 009	white				45°	45°
8 337 555 009	silver grey					

*Also available as up- or downlight only.

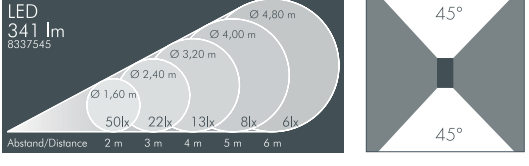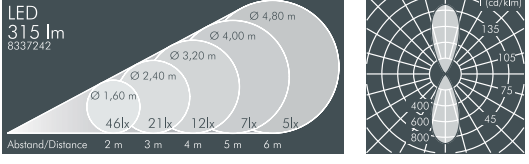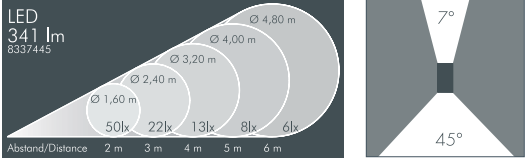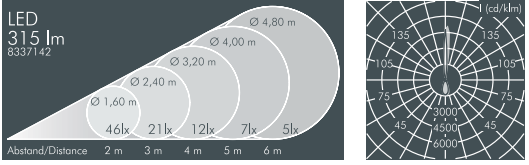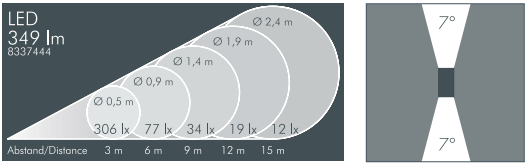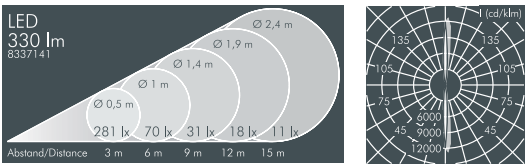

LED (see page 247)
Luminaires available in 2700 K and other colour temperatures upon request

