

Uplight 135 adjustable optics

With high performance LED,
CRI: > 80, Colour tolerance: max. 2 SDCM
Service life: L90/B10 > 50 000 h
Protection class I, IP67 , IK10
corrosion-resistant cast aluminium housing AlSi12,
double polyester powder coated,
LED board adjustable 0-15°, lockable,
highly efficient aluminium reflector,
all exterior steel parts are stainless steel,
tempered safety glass flush with trim ring,
for loads up to max. 5000 kg (according to
DIN EN 60598-2-13), silicon gasket,
V4A stainless steel trim ring and 3 screws,
M20 cable gland with 0.8 m cable H05RN-F3G1,
integral driver (AC/DC)

Uplight 135, adjustable optics, narrow beam*

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 657 016 019	1.6 kg	1 x LED 3 W warm white (3000 K)	125 lm	0 – 15°	4°

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 657 015 019	1.6 kg	1 x LED 3 W neutral white (4000 K)	142 lm	0 – 15°	4°

* Recommended wall distance 0.1 m

Uplight 135, adjustable optics, medium wide beam






Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 657 016 049	1.6 kg	1 x LED 3 W warm white (3000 K)	125 lm	0 – 15°	13°

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 657 015 049	1.6 kg	1 x LED 3 W neutral white (4000 K)	143 lm	0 – 15°	13°

Part number	Description
8 658	Luminaire for installation flush with surrounding surface (in combination with installation sleeve 126 0 205 060)

Accessories Uplight 135

Part number	Description
126 0 205 000	Installation sleeve* , polypropylene, for luminaire with overlapping trim (for luminaires 8 657) * If necessary can be shortened on site.
126 0 205 060	Installation sleeve* , polypropylene, for luminaire with trim for flush mounting (for luminaires 8 658) * If necessary can be shortened on site.
226 0 161 000	Connection box , for single connection to luminaire or for through wiring with buried cable. For luminaires supplied with cable and installation sleeve (recess box).

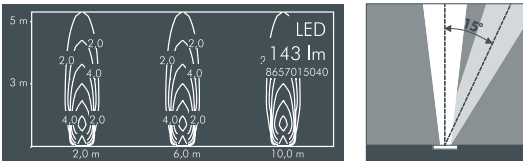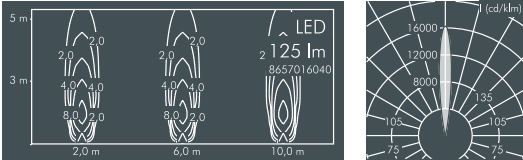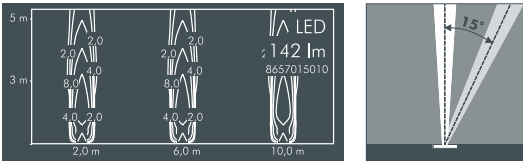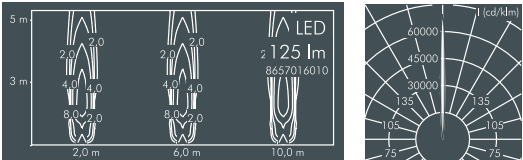

LED (see page 247)
Luminaires available in 2700 K and other colour temperatures upon request

