


true midi adjustable

zero high output

installation

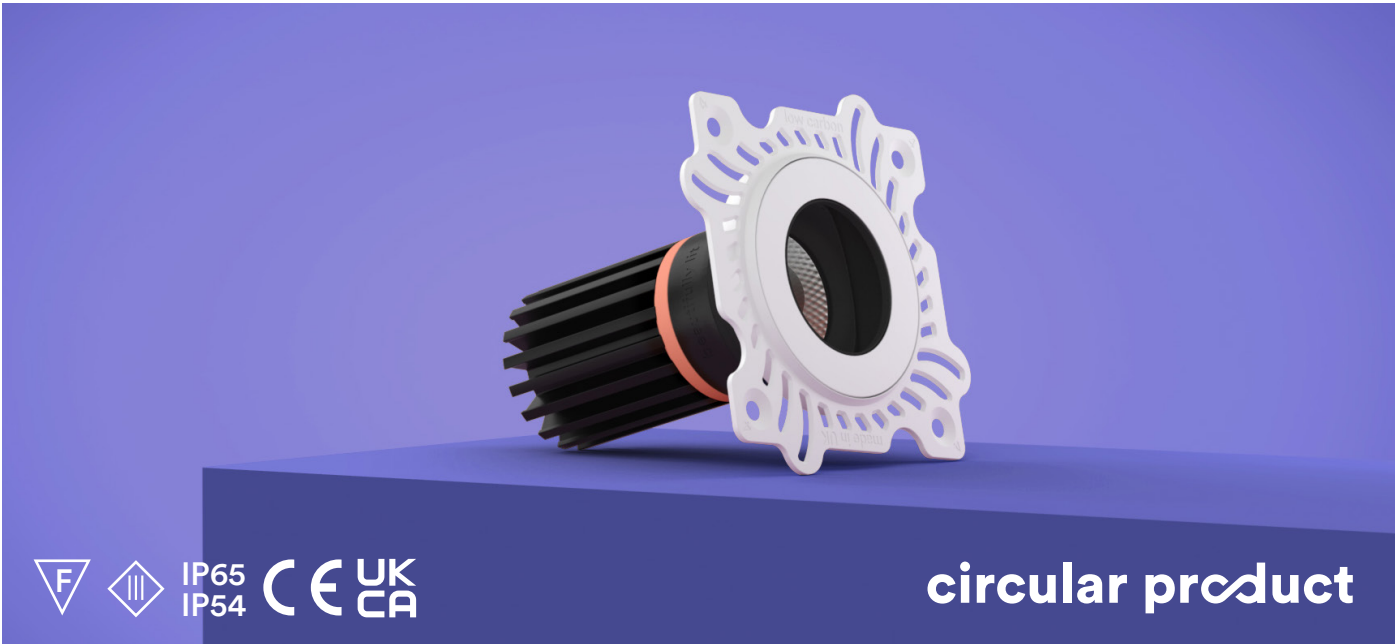

F

IP65


IP54

CE

UK

CA

circular product

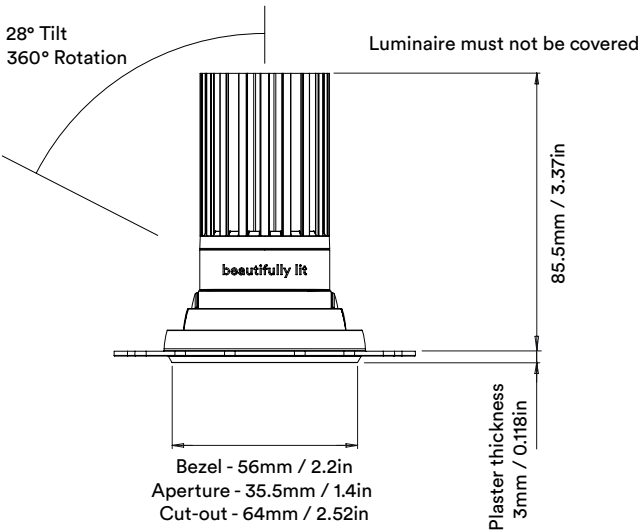

How to Install

- Cut hole in ceiling as per above cut-out; attach first fix plaster plate.
- Wire luminaire cable to Orluna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Press the luminaire into plaster frame, ensuring Ø250mm around luminaire and driver is left clear of insulation.

Luminaire Details

Cut-out	Ø64mm	Class	III
Recess Depth	86mm	IP Rating	IP54/IP65
Clearance	Fitting must not be covered	IP Zone	Zone 1
Fixing Method	Plaster-in/Garter spring	Material	Aluminium ADC12
Min Ceiling Thickness	N/A	Cable type	2 Core 0.75mm²
Max Ceiling Thickness	28mm	Cable Length	300mm
Max Driver Distance	20m	Bezel Temp	F Rated