


Project Name


Qty

Type

Catalog / Part Number

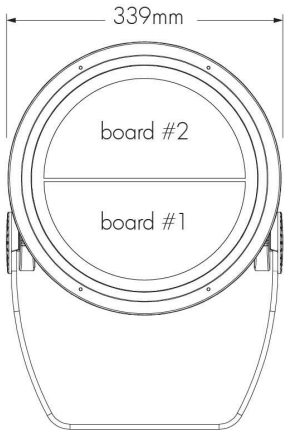

Front view

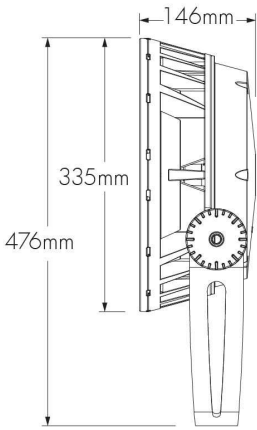

Side view

Photometric Summary (Discrete RGBW40K)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
XN (3°)	4,669	430,170
VN (6°)	5,079	351,460
NS (10°)	5,049	189,556
NF (20°)	4,425	37,332
M (30°)	4,483	18,931
FL (40°)	4,465	12,309
WFL (60°)	4,599	4,775
Asymmetric		
NAS	3,829	63,368 (@2.5°)
WW	4,303	18,755 (@5°)

Based on RGBW40K full output.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Photometric Summary (Opticolor+ MRGBWP)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
NS (10°)	4,891	86,649
NF (20°)	4,375	28,226
M (30°)	4,255	15,349
FL (40°)	4,405	11,899
WFL (60°)	4,233	4,330

Based on MRGBWP full output, white set to 3000K.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Description

The Lumenbeam Grande Colour Changing is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. The system offers numerous options including optics for flood or accent lighting, a choice of colour mixing, as well as various accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Colours and Colour Temperature (Discrete)	RGB: RGB RGBW30K: RGB + White 3000K RGBW40K: RGB + White 4000K RGBA: RGB + Amber
Colours and Colour Temperature (Opticolor™)	MRGBA: Opticolor Cluster with MRGBA (Red, Green, Blue, Amber)
Colours and Colour Temperature (Opticolor+™)	MRGBWP: MRGBWP With Opticolor+™ (Red, Green, Blue and Configurable White 2700-6500K) MRGBWP Typical Colour Rendering: 2700K-5000K: 90+ CRI 5000K-6500K: 85+ CRI
Optics (Nominal Distribution)	XN: XN (3° or 5°) VN: VN (6°) NS: NS (10°) NF: NF (20°) M: M (30°) FL: FL (40°) WFL: WFL (60°) VWFL: VWFL (90°) NAS: NAS (Narrow Asymmetric) WW: WW (Asymmetric Wallwash)
Optical Option	LSLH: Linear Spread Lens Horizontal Distribution LSLV: Linear Spread Lens Vertical Distribution
Option	SY: Short Yoke SRY: Short Rotational Yoke RY: Rotational Yoke 3GV: 3G ANSI C136.31-2010 Vibration Rating for Bridge Applications CRC: Corrosion-Resistant Coating for Hostile Environments


Photometric Summary (Opticolor MRGBA)

Symmetric

	Delivered output (lm)	Intensity (peak cd)
NS (10°)	4,754	84,223
NF (20°)	4,253	27,435
M (30°)	4,136	14,919
FL (40°)	4,282	11,566
WFL (60°)	4,114	4,209

Based on MRGBA full output.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Optic

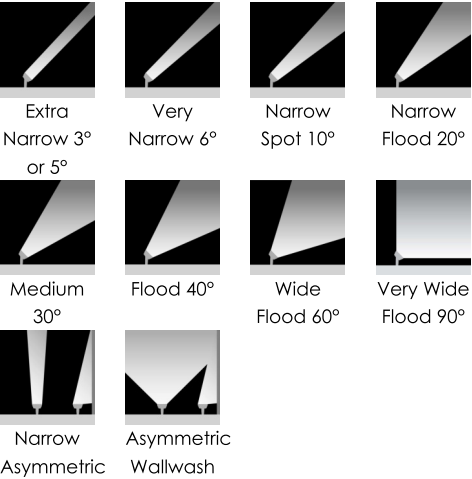

Colour and Colour Temperature



Control



Ratings

IP66 IK09

Certifications



Cable Colour	BK: Black WH: White
Power Consumption	86 to 100 W (see Power Consumption table for details)
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output (Discrete)	5,143 lm (RGB full output, VN 6°, DMX/RDM) 4,977 lm (RGBW30K full output, VN 6°, DMX/RDM) 5,079 lm (RGBW40K full output, VN 6°, DMX/RDM) 4,149 lm (RGBA full output, VN 6°, DMX/RDM)
Maximum Delivered Output (Opticolor)	4,754 lm (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Output (Opticolor+)	4,891 lm (MRGBWP full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Discrete)	357,498 cd at nadir (RGB full output, XN 5°, DMX/RDM) 421,567 cd at nadir (RGBW30K full output, XN 3°, DMX/RDM) 430,170 cd at nadir (RGBW40K full output, XN 3°, DMX/RDM) 351,449 cd at nadir (RGBA full output, XN 3°, DMX/RDM)
Maximum Delivered Intensity (Opticolor)	84,223 cd at nadir (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Opticolor+)	86,649 cd at nadir (RGBW30K full output, XN 3°, DMX/RDM)
Illuminance at Distance (Discrete)	Minimum 1 lx at 600 m (RGB full output, XN 5°, DMX/RDM) Minimum 1 lx at 652 m (RGBW30K full output, XN 3°, DMX/RDM) Minimum 1 lx at 659 m (RGBW40K full output, XN 3°, DMX/RDM) Minimum 1 lx at 595 m (RGBA full output, XN 3°, DMX/RDM)
Illuminance at Distance (Opticolor)	Minimum 1 lx at 290 m (MRGBA full output, NS 10°, DMX/RDM)
Illuminance at Distance (Opticolor+)	Minimum 1 lx at 294 m (MRGBWP full output, NS 10°, DMX/RDM)
Lumen Maintenance	L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported) L70 > 150,000 hrs Ta 25 °C (projected)* L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported) L90 = 55,400 hrs Ta 25 °C (projected)* *Estimated based on in-situ case temperature and LM-80 report
Physical	
Housing Material	Low copper content high pressure die-cast aluminium
Yoke Material	Heavy aluminium (standard yoke included)
Lens Material	Clear tempered glass
Dome Lens Material	Acrylic
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	10.89 kg
EPA	Front = 0.1 m², Side = 0.03 m²
Electrical and Control	
Voltage	100 to 277 volts
Fixture Cable	Power and data in one cable

Conductors	3C: 3 x 1,5 mm ² (LT control) 5C: 5 x 1,5 mm ² (DALI8 control) 6C: 3 x 1,5 mm ² / 3 x 0,20 mm ² (DMX/RDM control)
Inrush Current (Peak)	55A @230VAC
Control	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Control
Resolution (DMX/RDM)	Per board or fixture (configured with LumenID V3 software), 8-bit or 16-bit, 3 channels (RGB) or 4 channels (MRGBA and MRGBWP)

Environmental

Storage Temperature	-40 °C to 70 °C (device must reach start-up temperature value before operating)
Start-up Temperature	-25 °C to 50 °C
Operating Temperature	-40 °C to 50 °C
Ingress Protection Rating	IP66
Impact Resistance Rating	IK09

Accessories (Order Separately)


Optical Accessories	Lumenbeam Grande Snoot, Lumenbeam Grande Snoot Wide, Lumenbeam Grande Visor, Lumenbeam Grande Linear Spread Lens Adjustable, Lumenbeam Grande Wire Guard, Lumenbeam Grande Dome Lens
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Lumenscene™ (LSC), Pharos® Lighting Control Kit (PHAROS)
Diagnostic and Addressing Tools	LumenID (LID)

Power Consumption

Control Option	Colour and Colour Temperature	Optic	Wattage (W)
LT DMX/RDM DALI8	RGB	XN/NAS	100
		VN/NS/NF/M/FL/WFL/VWFL/WWW	86
LT DMX/RDM DALI8	RGBW, RGBA	XN/NAS	96
		VN/NS/NF/M/FL/WFL/VWFL/WWW	90
LT DMX/RDM DALI8	MRGBA, MRGBWP	NS/NF/M/FL/WFL/VWFL	100

Colour Point Information

MRGBWP

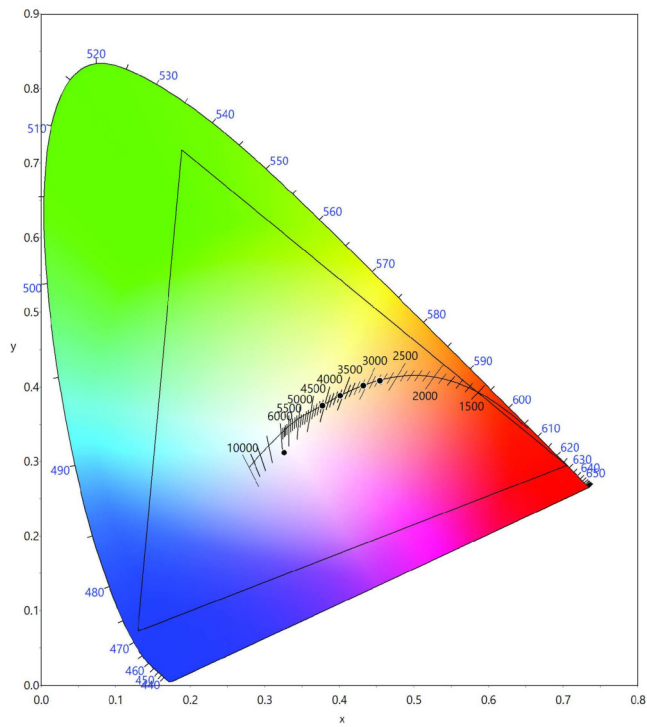

Dominant Wavelength and Chromaticity


	Dominant Wavelength	Chromaticity	
		C _x	C _y
Red	~628nm	0.7050	0.2949
Green	~531nm	0.1885	0.7178
Blue	~471nm	0.1298	0.0726
Amber	~591nm	0.5755	0.4126

	Cx	Cy
MRGBWP Full On	0.3261	0.3121
27K Optdrive	0.4545	0.4081
30K Optdrive	0.4318	0.4017
35K Optdrive	0.4010	0.3883
40K Optdrive	0.3773	0.3747


Values measured from Steady State Full on Optidrive @ 25°C ambient conditions.

Mounting Options


SY - Short Yoke

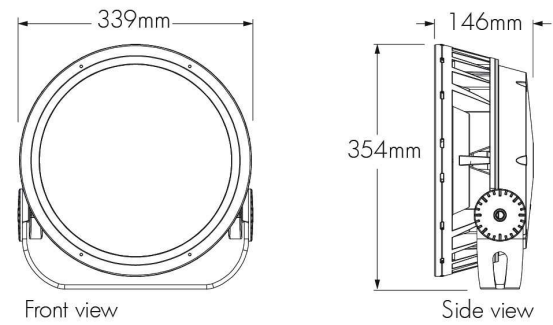

SRY - Short Rotational Yoke

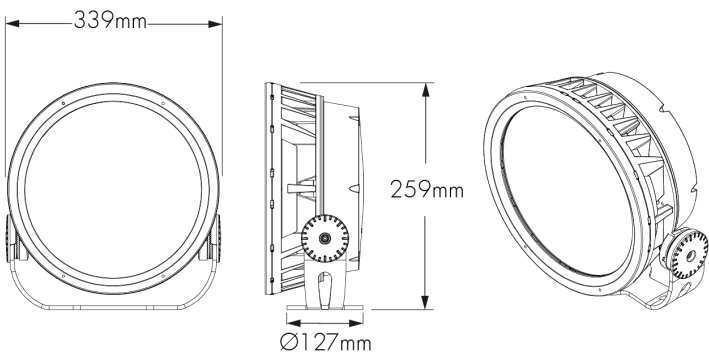


RY - Rotational Yoke

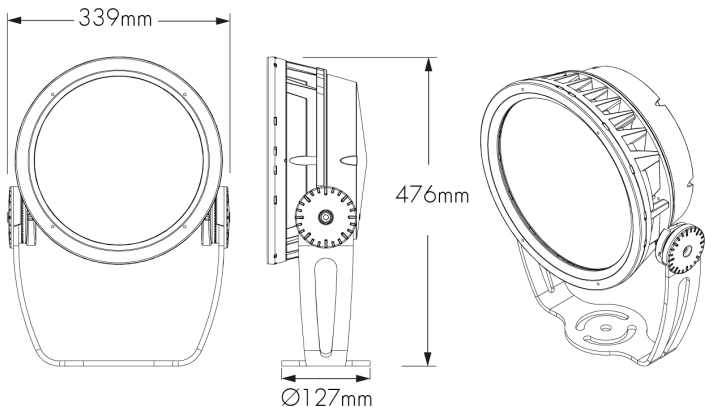


Mounting Details

Mounting Hole Pattern - Standard And Short Yoke




3 bolts are required for wind and vibration resistance, provided by others.

Mounting Hole Pattern - Rotational Yoke




3 bolts are required for wind and vibration resistance, provided by others.

Adjustable Pivot Limits (Adjustable In 6 Degree Increments)

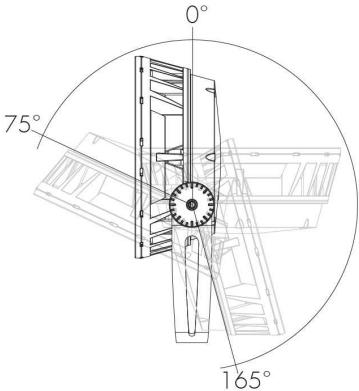

Standard Yoke



Short Yoke


Optical Options – Discrete

LSLH - Linear Spread Lens Horizontal Distribution



LSLH - Linear spread lens horizontal distribution

LSLV - Linear Spread Lens Vertical Distribution



Beam Angles

Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	8° x 50°
NS	9° x 56°
NF	17° x 57°
M	27° x 68°
FL	37° x 74°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).


Optical Options - Opticolor™ and Opticolor+

LSLH - Linear Spread Lens Horizontal Distribution



LSLH - Linear spread lens horizontal distribution

LSLV - Linear Spread Lens Vertical Distribution



Beam Angles


Optic installed in fixture	Beam angle with LSLH/LSLV
NS	11° x 61°
NF	19° x 66°
M	26° x 70°
FL	31° x 71°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.


Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Mounting Accessories (Order Separately)


Round Pole Mounting Accessory

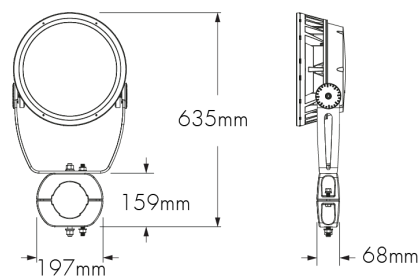

PM4 model shown.
Consult factory for square pole section.



PM4-1, PM4.5-1, PM5-1 - Round pole mounting accessory - single fixture




PM4-5, PM4.5-2, PM5-2 - Round pole mounting accessory - twin fixtures
*One bracket assembly is supplied per 2 fixtures unless otherwise specified.


	PM4	PM4.5	PM5
For pole Ø	101.6mm ± 1.6mm	114.3mm ± 1.6mm	127mm ± 1.6mm

Consult factory for other pole diameters.

Tenon Adapter

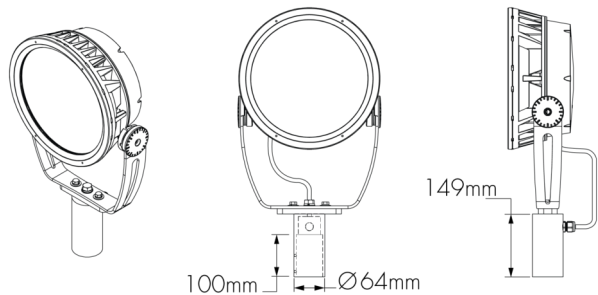

TN2 - Tenon adapter to fit on 60 mm O.D. tenon
Vertical mounting only. Consult factory for horizontal mounting.

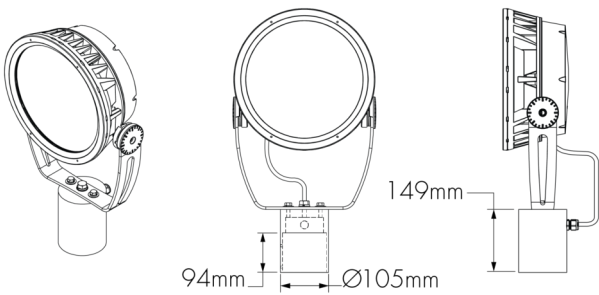


TN4 - Tenon adapter to fit on 102 mm O.D. tenon
Vertical mounting only. Consult factory for horizontal mounting.

Optical Accessories (Order Separately)


Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.

SN - Snoot

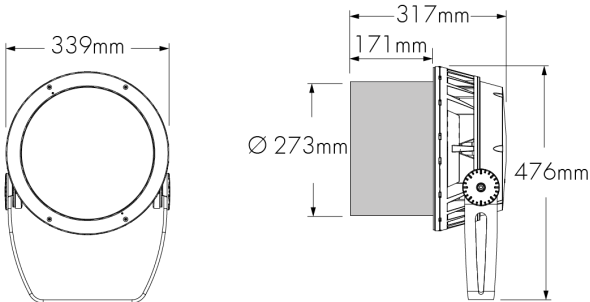


LBG**SN-FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

SNW - Snoot Wide

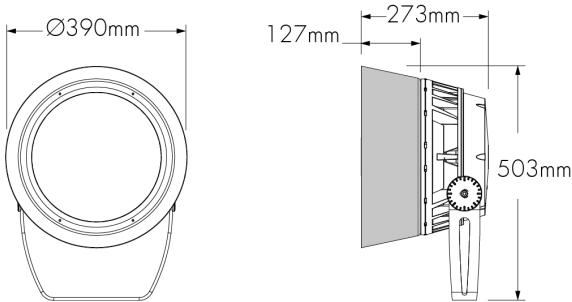


LBG**SNW-FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

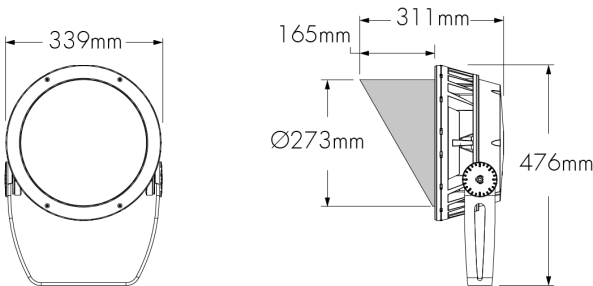


LBG**VS-FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable

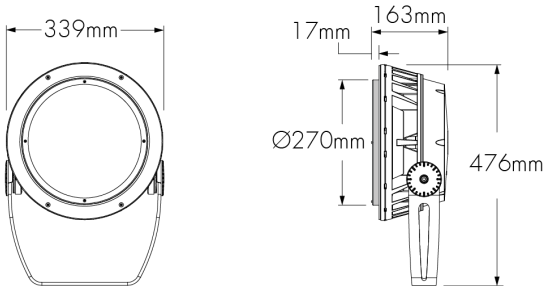

LBG**LSLA-FINISH-OPTIONS** (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

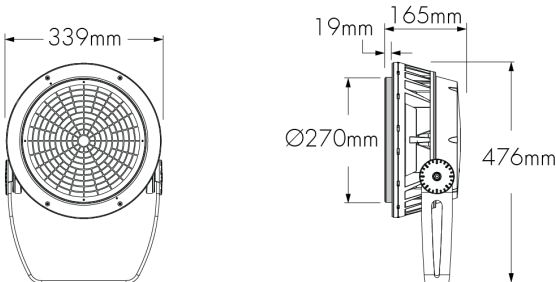

LBG**WG-FINISH-OPTIONS** (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBG SNLSLA	N/A*	LBG VLSLA
Wire guard	LBG SNWG	N/A	LBG VSWG

Accessory combinations must be ordered together on a single line
Ex: A snoot + wire guard combination order code is LBG**SNWG-FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.
*Consult factory for a linear spread lens adjustable + snoot wide combination.

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.


DM - Dome Lens

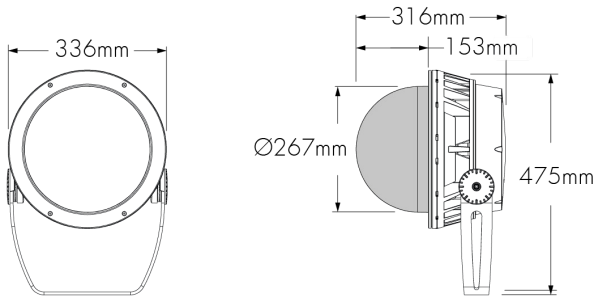


LBGDM-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Dome - Short Yoke - Pivot limits



Dome - Standard Yoke - Pivot limits

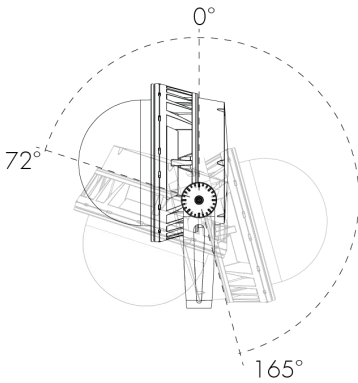


Dome Lens is available with WFL Optic only. The WFL optic must be specified for the fixture.

Dome Lens cannot be combined with other optical accessories.

Dome Lens will affect beam distribution. Consult factory for application support and photometric performance.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147683

Diffuser Lens 2 (2 Notches)




147684

Diffuser Lens 3 (3 Notches)




147685

Diffuser Lens 4 (4 Notches)




147686

Diffuser Lens 5 (5 Notches)



147687

Diffuser Lens 6 (6 Notches)



147688

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-**FINISH**-LBALK **LBM/LBMP**: LBMLSLA-**FINISH**-LBALK **LBL/LBLP**: LBLLSLA-**FINISH**-LBALK **LBG/LBGP**: LBGLSLA-**FINISH**-LBALK **LBX/LBXP**: LBXLSLA-**FINISH**-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

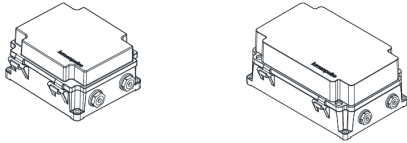

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

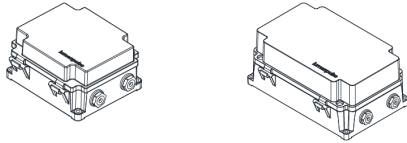

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

Lumenscene



The Lumenscene, a user-friendly DMX/RDM lighting controller that includes eight preconfigured scene changes and can be programmed via RDM.

PHAROS - Pharos® Kit

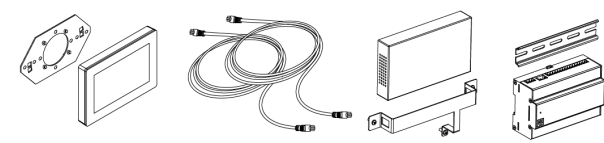

The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID




LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

EPA Guide


	LBG	LBG with Snoot	LBG with Visor	LBG with Snoot Wide	LBG with Dome Lens
					
EPA front (m²)	0.104	0.104	0.104	0.167	0.104
EPA side (m²)	0.032	0.069	0.067	0.068	0.02

Resolution Details (Discrete)

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:



board #2
4,5,6
colour 2
board #1
1,2,3
colour 1




board #2
5,6,7,8
colour 2
board #1
1,2,3,4
colour 1


RGBW30K, RGBW40K and RGBA colour mixing options

RGB colour mixing option

Resolution Per Fixture: Each Fixture Is Addressed Independently
DMX Addresses:



1,2,3
colour 1



1,2,3,4
colour 1


RGBW30K, RGBW40K and RGBA colour mixing options

RGB colour mixing option


Fixture resolution can be configured on-site within the LumenID V3 software.

Resolution Details (Opticolor and Opticolor+)

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:



board #2
5,6,7,8
colour 2
board #1
1,2,3,4
colour 1



1,2,3,4
colour 1

MRGBA and MRGBWP colour mixing options

Fixture resolution can be configured on-site within the LumenID V3 software.


Typical Wiring Diagrams

Wiring Colour Code

CE Colour Code	USE
Yellow/Green	Ground
Brown	Line
Blue	Line/Neutral
Black or Purple	1-10V / Data +
Grey or Orange	1-10V / Data -
Grey	Signal common (DMX/RDM only)


CE Class II Colour Code		USE
All other controls	DMX/RDM	
Brown	Brown	Line
Blue	Blue	Line/Neutral
Black 1	Grey	Signal common (DMX/RDM only)
Black 2	Black or Purple	1-10V / Data +
Grey	Grey or Orange	1-10V / Data -
N/A	Yellow/Green	Ground (do not connect)

Lumentalk (LT)

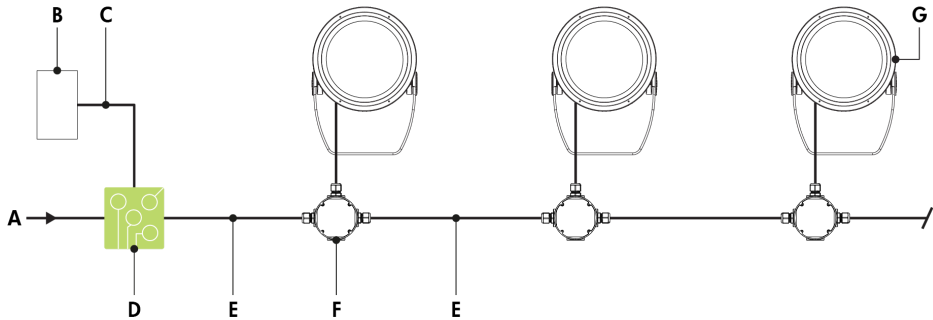

- A - Power input (100-277V AC, wiring by others)
- B - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DMX)
- E - Power wiring (by others)
- F - Junction box (by others)
- G - Lumenbeam Grande


Lumentalk (LT) - Wiring Detail - CE

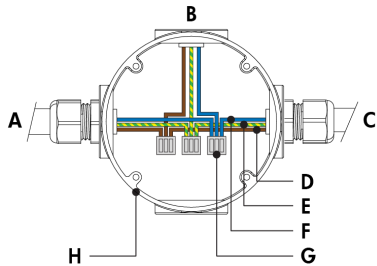

- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Terminal connector (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colours is 1 minute). Consult factory for applications that require additional capabilities.
- 86 to 100 watts per fixture, see Power Consumption table for details.

Star Layout (DMX/RDM)

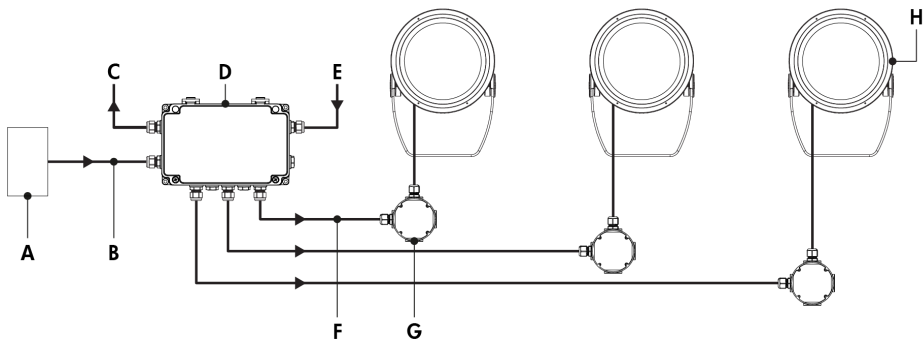


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenbeam Grande

Star Layout (DMX/RDM) - Wiring Detail - CE



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Star Layout (DMX/RDM) - Wiring Detail - CE Class II



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBG	10	16	18	21

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- RGB colour mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA and MRGBWP colour mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 86 to 100 watts per fixture, see Power Consumption table for details.

Daisy Chain Layout (DMX/RDM)

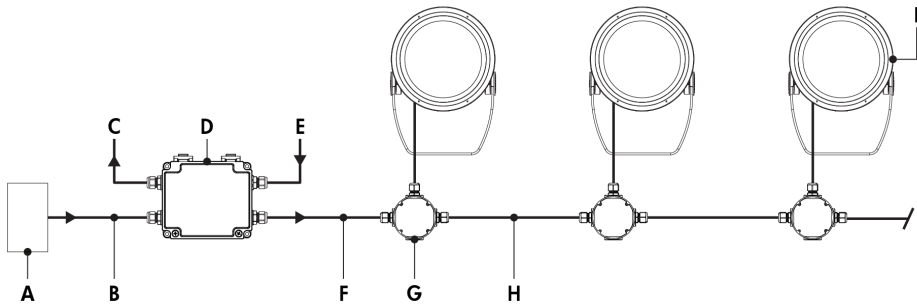


- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-DS
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Power and data wiring (by others)
- I** - Lumenbeam Grande

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First Or Middle Of Run) - CE

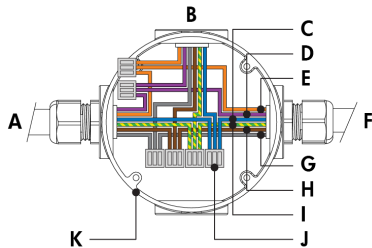


- A** - From CBX or previous fixture
- B** - To fixture
- C** - Neutral
- D** - Data +
- E** - Data -
- F** - To next fixture
- G** - Signal common
- H** - Line
- I** - Ground
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End Of Run) - CE




- A** - From CBX or previous fixture
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run) - CE Class II

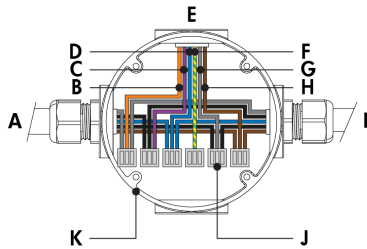

- A** - From CBX or previous fixture
- B** - Data -
- C** - Data +
- D** - Neutral
- E** - To fixture
- F** - Ground (do not connect)
- G** - Signal common
- H** - Line
- I** - To next fixture
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run) - CE Class II



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBG	10	16	18	21

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 0.9 m cable length between fixture and next junction box for daisy chain layout.
- RGB colour mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA and MRGBWP colour mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 86 to 100 watts per fixture, see Power Consumption table for details.

DALI 2 T8 (DALIT8)

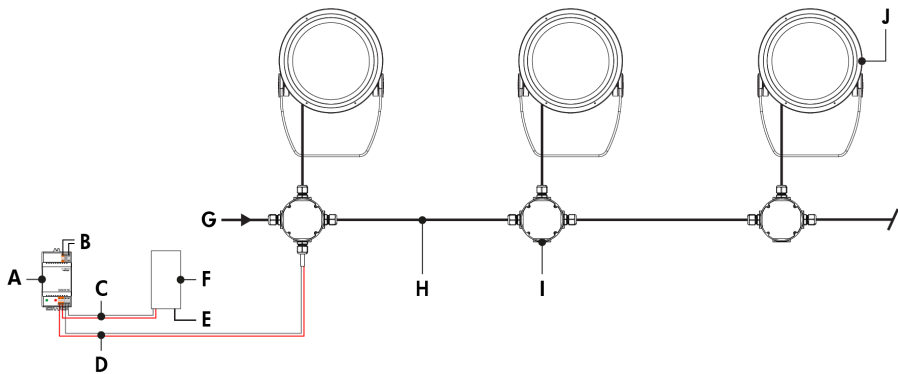


- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - Data output to fixture (wiring by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - DALI controller (by others)
- G - Power input (100-277V AC, wiring by others)
- H - Power and data wiring (by others)
- I - Junction box (by others)
- J - Lumenbeam Grande

DALI 2 Type 8 (DALIT8) - Wiring Detail - CE

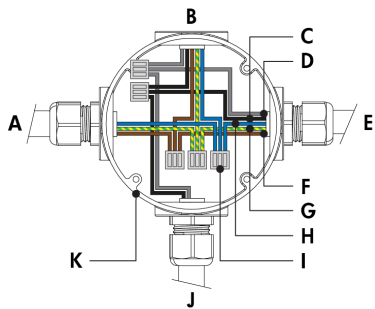

- A - Power input or from previous fixture
- B - To fixture
- C - DA +
- D - DA -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)

DALI 2 Type 8 (DALIT8) - Wiring Detail - CE Class II

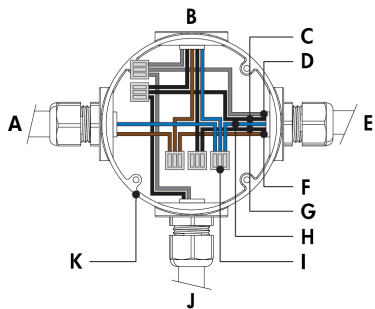

- A - Power input or from previous fixture
- B - To fixture
- C - DA + (black 2)
- D - DA -
- E - To next fixture
- F - Line
- G - Signal common (black 1)
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- The Lumenbeam responds to RGBWAF for colour controls and Tc for dim to warm and tunable white.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 86 to 100 watts per fixture, see Power Consumption table for details.

How to Order

Housing	Voltage	Colour and Colour Temperature	Optic1	Optic2	Optical Option ⁽¹⁴⁾ ⁽¹⁶⁾ ⁽¹⁷⁾
L8G Lumenbeam™ Grande	100 100 Volts	RGB RGB	XN Extra Narrow 3° or 5° ⁽⁶⁾ ⁽⁷⁾ ⁽⁸⁾	XN Extra Narrow 3° or 5° ⁽⁶⁾ ⁽⁷⁾ ⁽⁸⁾	LSLH Linear Spread Lens Horizontal Distribution ⁽¹⁵⁾ LSLV Linear Spread Lens Vertical Distribution ⁽¹⁵⁾
	120 120 Volts	RGBW30K RGB + White 3000K ⁽¹⁾	VN Very Narrow 6° ⁽⁷⁾ ⁽⁸⁾	VN Very Narrow 6° ⁽⁷⁾ ⁽⁸⁾	
	208 208 Volts	RGBW40K RGB + White 4000K ⁽¹⁾	NS Narrow Spot 10° ⁽⁷⁾	NS Narrow Spot 10° ⁽⁷⁾	
	220 220 Volts	RGBA RGB + Amber	NF Narrow Flood 20° ⁽⁷⁾	NF Narrow Flood 20° ⁽⁷⁾	
	240 240 Volts	MRGBA Opticolor with MRGBA Amber ⁽¹⁾ ⁽²⁾	M Medium 30° ⁽⁷⁾ ⁽⁹⁾	M Medium 30° ⁽⁷⁾ ⁽⁹⁾	
	277 277 Volts	MRGBWP MRGBW With Opticolor+™ ⁽¹⁾ ⁽²⁾ ⁽³⁾ ⁽⁴⁾ ⁽⁵⁾	FL Flood 40° ⁽⁷⁾	FL Flood 40° ⁽⁷⁾	
			WFL Wide Flood 60° ⁽⁷⁾ ⁽¹⁰⁾ ⁽¹¹⁾	WFL Wide Flood 60° ⁽⁷⁾ ⁽¹⁰⁾ ⁽¹¹⁾	
			VWFL Very Wide Flood 90° ⁽⁷⁾ ⁽¹⁰⁾ ⁽¹²⁾ ⁽¹³⁾	VWFL Very Wide Flood 90° ⁽⁷⁾ ⁽¹⁰⁾ ⁽¹²⁾ ⁽¹³⁾	
			NAS Narrow Asymmetric ⁽⁷⁾ ⁽⁸⁾	NAS Narrow Asymmetric ⁽⁷⁾ ⁽⁸⁾	
			WW Asymmetric Wallwash ⁽⁷⁾ ⁽⁸⁾	WW Asymmetric Wallwash ⁽⁷⁾ ⁽⁸⁾	

Notes:

1. Consult factory for the availability of more colour and CCT options (e.g. royal blue).

2. Not available with XN, VN, NAS and WW optics.

3. MRGBWP can be configured to MRGB via RDM, consult factory for more details.

4. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumentalkID, LumentalkID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 1800K-8000K.

5. Consult factory for DALI8 applications with MRGBWP and a CCT other than 3000K.

6. Nominal distribution is 3° for RGBW30K, RGBW40K and RGBA colour options, and 5° for RGB.

7. Factory installed, not interchangeable on site.

8. Not available with MRGBA and MRGBWP colour temperature options.
9. Cannot be combined with other optics when RGB, RGBW30K, RGBW40K and RGBA colour temperatures are specified.

10. Cannot be combined with other optics.

11. A dome lens accessory is available, order separately. For compatibility, a WFL optic must be specified for the fixture.

12. Available with MRGBA and MRGBWP colour temperature options only.

13. Consult factory for photometric performance.

14. Optical options are factory installed and cannot be changed in the field.

15. Field adjustable spread lens optical accessory available, order separately.

16. Not available with WFL, NAS and WW optics when combined with RGB colour temperature option.

17. Not available with VN, WFL, VWFL, NAS and WW optics when combined with MRGBA or MRGBWP colour temperature options.

How to Order

Finish	Control	Option	Certification	Cable Length ⁽²⁴⁾ ⁽³⁰⁾	Cable Colour
BK Black Sandtex®	LT Lumentalk ⁽²¹⁾ ⁽²²⁾	SY Short Yoke	UL UL Compliant ⁽²⁹⁾	1M 1 m ⁽²⁴⁾ ⁽³⁰⁾	BK Black
BRZ Bronze Sandtex®	DMX/RDM DMX/RDM Enabled ⁽²³⁾ ⁽²⁴⁾	SRY Short Rotational Yoke ⁽²⁶⁾	CE CE Compliant	5M 5 m	WH White ⁽³¹⁾
SI Silver Sandtex®	DALIT8 DALI 2 T8 Control ⁽⁵⁾ ⁽²⁵⁾	RY Rotational Yoke ⁽²⁶⁾	CEII CE Compliant Class II Double Insulated	10M 10 m	
WH Smooth White		3GV 3G ANSI C136.31-2010 Vibration Rating for Bridge Applications		15M 15 m	
BKTX Textured Black		CRC Corrosion-Resistant Coating ⁽²⁷⁾ ⁽²⁸⁾		20M 20 m	
BRZTX Textured Bronze Non-Metallic				30M 30 m	
GRATX Textured Medium Grey					
GRNTX Textured Green					
WHTX Textured White					
CC Custom Colour & Finish ⁽¹⁸⁾ ⁽¹⁹⁾ ⁽²⁰⁾					

Notes:

- 5.** Consult factory for DALI8 applications with MRGBWP and a CCT other than 3000K.

18. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colours with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colours, other RAL textures and glosses, or to match alternate colour charts. Final colour matching results may vary.

19. Setup charges apply for RAL colours. Consult factory for details.

20. Longer lead times can be expected for custom RAL colour finishes.

21. A Lumentranslator 2 (LTL2) and LumentalkID (LIDLTI) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

22. Not available with Class II double insulated option.
- 23.** A control box (CBX) and LumenID (LID) must be specified.

24. Maximum of 1 m cable length for daisy chain DMX applications with CBX-DS.

25. DALI 2 T8 controller required, provided by others. DALI2 T8 control uses a single DALI short address.

26. Consult factory for applications with 3GV requirements.

27. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

28. Setup charges apply. Consult factory for details.

29. Consult North American specification sheets and installation instructions for UL wiring information.

30. 1 m cable length is standard unless otherwise specified.

31. Not available with CE or CEII certification options.