


Project Name

Qty

Type

Catalog / Part Number

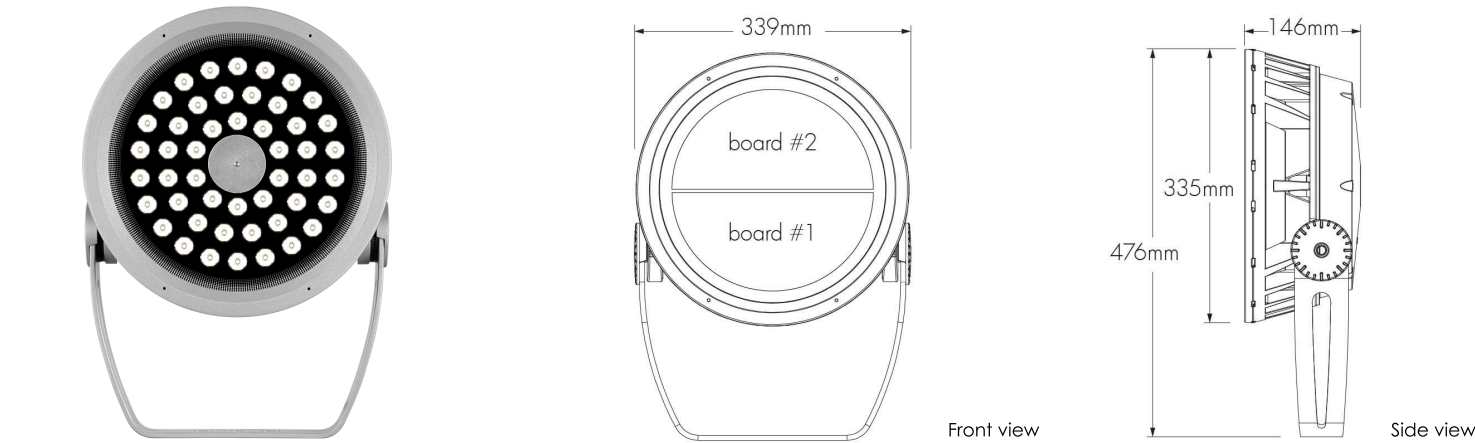


Photometric Summary

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
XN (3°)	8,357	1,032,800
VN (6°)	7,825	562,416
NS (10°)	7,882	304,148
NF (20°)	12,483	129,569
M (30°)	11,447	48,334
FL (40°)	10,500	23,266
WFL (60°)	9,537	8,410

Asymmetric		
NAS	6,556	108,502 (@2.5°)
WW	9,951	25,111 (@5°)

Based on 4000K configuration.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Optic

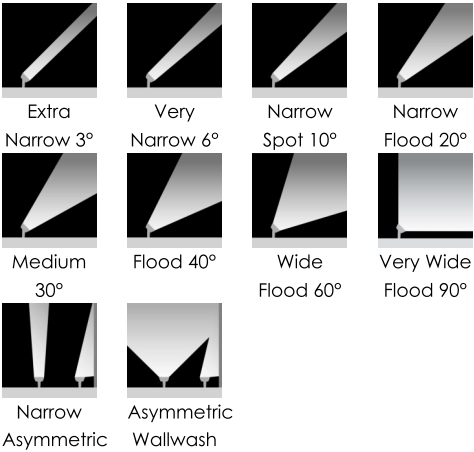

Description

The Lumenbeam Grande is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. It has numerous options, including optics for flood or accent lighting, colour temperatures and colours, various accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Colour and Colour Temperature	2200K, 2700K, 3000K, 3500K, 4000K, 5700K, Red, Green, Blue
Optics (Nominal Distribution)	XN (3°), VN (6°), NS (10°), NF (20°), M (30°), FL (40°), WFL (60°), VWFL (90°), NAS (Narrow Asymmetric), WW (Asymmetric Wallwash)
Optical Option	Linear Spread Lens Horizontal Distribution, Linear Spread Lens Vertical Distribution
Option	Short Yoke Short Rotational Yoke Rotational Yoke 3G ANSI C136.31-2010 Vibration Rating for Bridge Applications Corrosion-Resistant Coating for Hostile Environments
Cable Colour	Black, White
Power Consumption	88 to 100 W (see Power Consumption table for details)
Warranty	5-year limited warranty

Performance	
Maximum Delivered Output	12,483 lm (4000K, NF 20°)
Maximum Delivered Intensity	1,032,800 cd at nadir (4000K, XN 3°)
Illuminance at Distance	Minimum 1 lx at 1020 m (4000K, XN 3°)
Colour Consistency	2 SDCM
Colour Rendering	Minimum CRI 80
Lumen Maintenance	L70 B50 > 250,000 hrs (Ta 25 °C) (> 80,000 hrs for XN 3°, VN 6°, NAS optics only)

Colour and Colour Temperature

2200K

2700K

3000K

3500K

4000K

5700K

Red

Green

Blue

Control

ON/OFF 0-10V DALI DMX/RDM



Ratings

IP66 IK09

Certifications

UL

US

CE

RoHS

5

YEARS

lumenpulse

3G

VIBRATION RATING

Physical

Housing Material	Low copper content high pressure die-cast aluminium
Yoke Material	Heavy aluminium (standard yoke included)
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	10.89 kg
EPA	Front = 0.1 m², Side = 0.03 m²

Electrical and Control

Voltage	100 to 277 volts
Fixture Cable	Power and data in one cable
Conductors	3C: 3 x 1,5 mm² (NO, LT control) 5C: 5 x 1,5 mm² (DIM, DALI, ES control) 6C: 3 x 1,5 mm²/ 3 x 0,20 mm² (DMX/RDM control)
Inrush Current (Peak)	55A @230VAC
Control	On/Off Control, Lumentalk, 1-10V Dimming, DALI Dimming, DMX/RDM Enabled
Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit

Environmental

Storage Temperature	-40 °C to 70 °C (device must reach start-up temperature value before operating)
Start-up Temperature	-25 °C to 50 °C
Operating Temperature	-40 °C to 50 °C
Ingress Protection Rating	IP66
Impact Resistance Rating	IK09

Accessories (Order Separately)

Optical Accessories	Lumenbeam Grande Snoot, Lumenbeam Grande Snoot Wide, Lumenbeam Grande Visor, Lumenbeam Grande Linear Spread Lens Adjustable, Lumenbeam Grande Wire Guard, Lumenbeam Grande Dome Lens
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Lumenscene™ (LSC), Pharos® Lighting Control Kit (PHAROS)
Diagnostic and Addressing Tools	LumenID (LID)

lumenpulse™

1220 Marie-Victorin Blvd., Longueuil, QC, J4G 2H9, CAN | T 514.937.3003 | 1.877.937.3003 | info@lumenpulse.com
www.lumenpulse.com www.lumenpulse.com/products/5039

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2025.04.29 Copyright © 2025 LMPG Inc.
JC - R29

2 / 19


Power Consumption

Control Option	Colour and Colour Temperature	Optic	Wattage (W)
NO LT DIM DALI ES DMX/RDM	22K, 27K, 30K, 35K, 40K, 57K	XN/NAS	100
		VN/NS	
		NF/M/FL/WFL/VWFL/WWW	
	RD, GR, BL	XN/NAS	88
		VN/NS	
		NF/M/FL/WFL/VWFL/WWW	


Chromaticity Data

TM-30 - 4000K

CCT	CIE		TM-30	
4000K	R _e	83	85	R _f
	R _g	14	96	R _g




Spectral Power Distribution

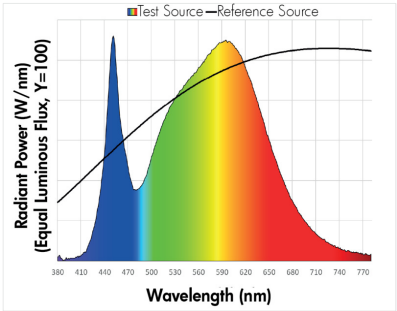


Mounting Options


SY - Short Yoke

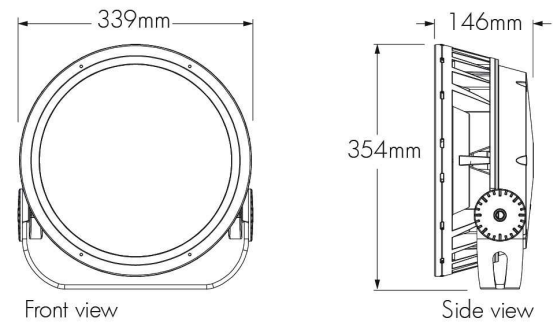

SRY - Short Rotational Yoke

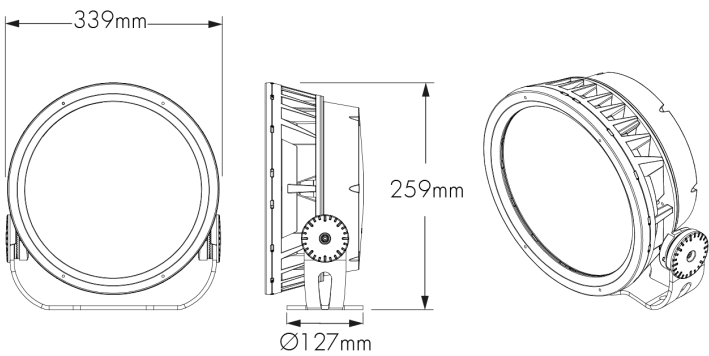


RY - Rotational Yoke

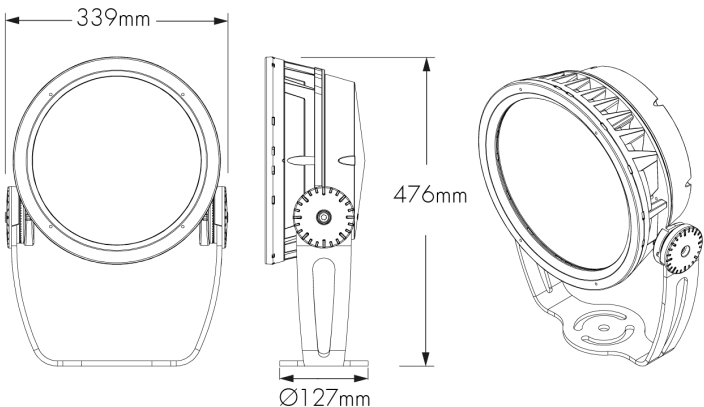


Mounting Details

Mounting Hole Pattern - Standard And Short Yoke




3 bolts are required for wind and vibration resistance, provided by others.

Mounting Hole Pattern - Rotational Yoke




3 bolts are required for wind and vibration resistance, provided by others.

Adjustable Pivot Limits (Adjustable In 6 Degree Increments)

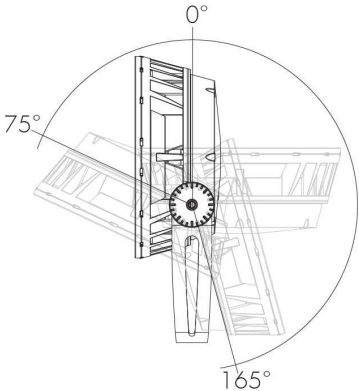

Standard Yoke



Short Yoke


Optical Options

LSLH - Linear Spread Lens Horizontal Distribution



LSLH - Linear spread lens horizontal distribution

LSLV - Linear Spread Lens Vertical Distribution



Beam Angles


Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	8° x 50°
NS	9° x 56°
NF	17° x 57°
M	27° x 68°
FL	37° x 74°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.


Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Mounting Accessories (Order Separately)


Round Pole Mounting Accessory

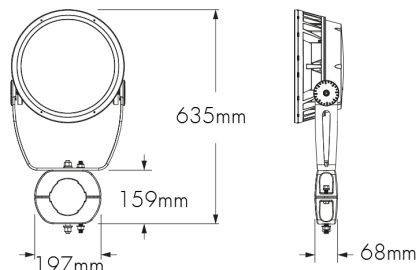

PM4 model shown.
Consult factory for square pole section.



PM4-1, PM4.5-1, PM5-1 - Round pole mounting accessory - single fixture




PM4-5, PM4.5-2, PM5-2 - Round pole mounting accessory - twin fixtures
*One bracket assembly is supplied per 2 fixtures unless otherwise specified.


	PM4	PM4.5	PM5
For pole Ø	101.6mm ± 1.6mm	114.3mm ± 1.6mm	127mm ± 1.6mm

Consult factory for other pole diameters.

Tenon Adapter

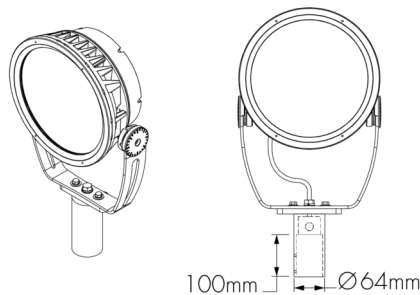

TN2 - Tenon adapter to fit on 60 mm O.D. tenon
Vertical mounting only. Consult factory for horizontal mounting.

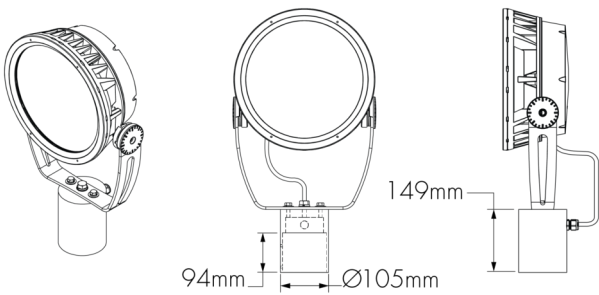


TN4 - Tenon adapter to fit on 102 mm O.D. tenon
Vertical mounting only. Consult factory for horizontal mounting.

Optical Accessories (Order Separately)


Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.

SN - Snoot

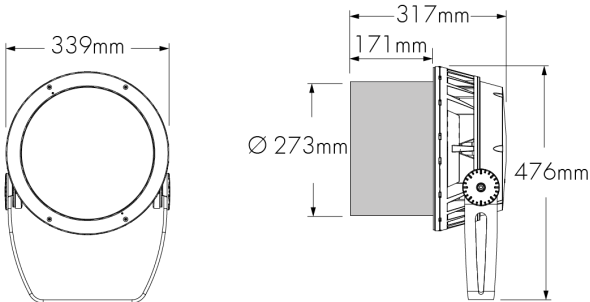


LBG**SN-FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

SNW - Snoot Wide

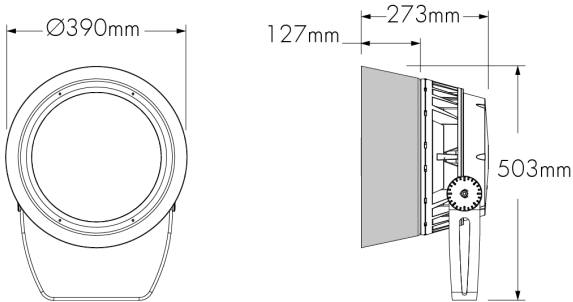


LBG**SNW-FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

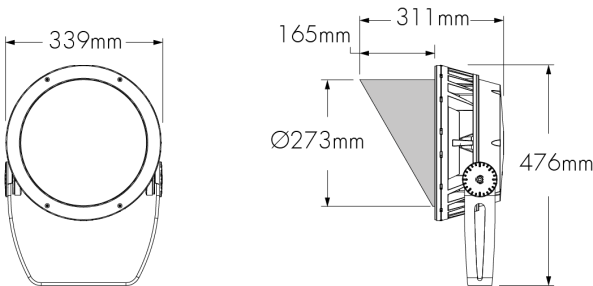


LBG**VS-FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable

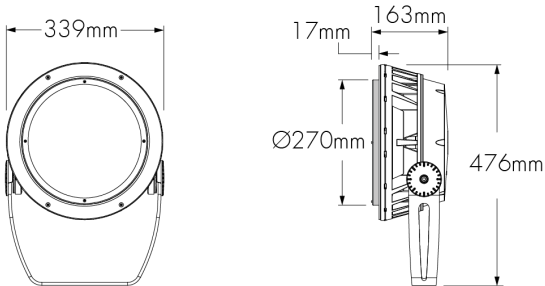

LBG**LSLA-FINISH-OPTIONS** (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

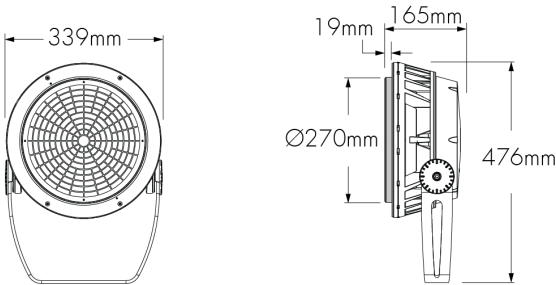

LBG**WG-FINISH-OPTIONS** (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBG SNLSLA	N/A*	LBG VLSLA
Wire guard	LBG SNWG	N/A	LBG VSWG

Accessory combinations must be ordered together on a single line
Ex: A snoot + wire guard combination order code is LBG**SNWG-FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.
*Consult factory for a linear spread lens adjustable + snoot wide combination.

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.


DM - Dome Lens

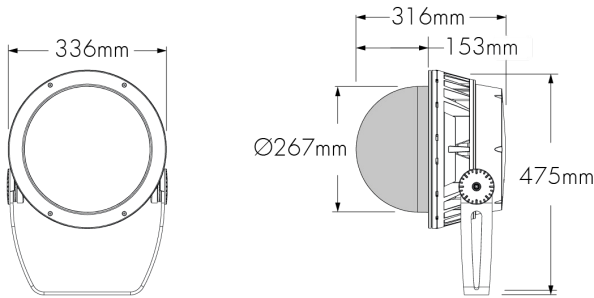


LBGDM-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Dome - Short Yoke - Pivot limits



Dome - Standard Yoke - Pivot limits

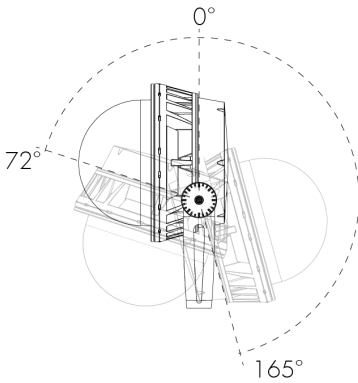


Dome Lens is available with WFL Optic only. The WFL optic must be specified for the fixture.

Dome Lens cannot be combined with other optical accessories.

Dome Lens will affect beam distribution. Consult factory for application support and photometric performance.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147683

Diffuser Lens 2 (2 Notches)




147684

Diffuser Lens 3 (3 Notches)




147685

Diffuser Lens 4 (4 Notches)




147686

Diffuser Lens 5 (5 Notches)



147687

Diffuser Lens 6 (6 Notches)



147688

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS:** LBALK-S **LBM/LBMP:** LBALK-M **LBL/LBLP:** LBALK-L **LBG/LBGP:** LBALK-G **LBX/LBXP:** LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS:** LBSLSLA-**FINISH**-LBALK **LBM/LBMP:** LBMLSLA-**FINISH**-LBALK **LBL/LBLP:** LBLLSLA-**FINISH**-LBALK **LBG/LBGP:** LBGLSLA-**FINISH**-LBALK **LBX/LBXP:** LBXLSLA-**FINISH**-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

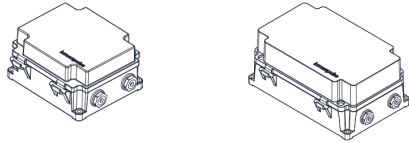

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

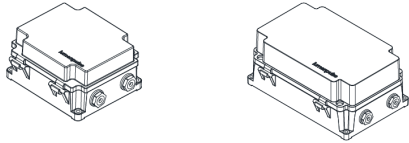

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

Lumenscene



The Lumenscene, a user-friendly DMX/RDM lighting controller that includes eight preconfigured scene changes and can be programmed via RDM.

PHAROS - Pharos® Kit

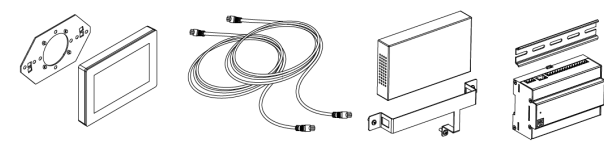

The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

EPA Guide

	LBG 	LBG with Snoot 	LBG with Visor 	LBG with Snoot Wide 	LBG with Dome Lens 
EPA front (m²)	0.104	0.104	0.104	0.167	0.104
EPA side (m²)	0.032	0.069	0.067	0.068	0.02


Typical Wiring Diagrams

Wiring Colour Code

CE Colour Code	USE
Yellow/Green	Ground
Brown	Line
Blue	Line/Neutral
Black or Purple	1-10V / Data +
Grey or Orange	1-10V / Data -
Grey	Signal common (DMX/RDM only)


CE Class II Colour Code		USE
All other controls	DMX/RDM	
Brown	Brown	Line
Blue	Blue	Line/Neutral
Black 1	Grey	Signal common (DMX/RDM only)
Black 2	Black or Purple	1-10V / Data +
Grey	Grey or Orange	1-10V / Data -
N/A	Yellow/Green	Ground (do not connect)

On/Off Control (NO)

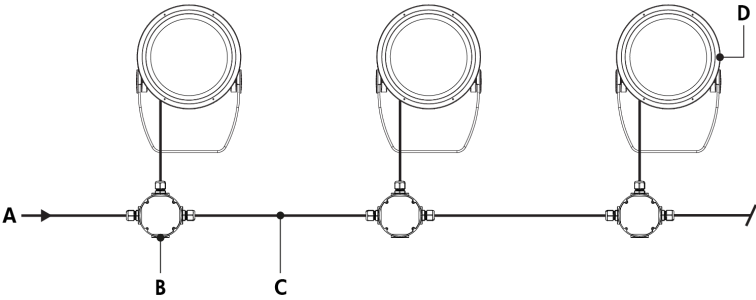


- A - Power input (100-277V AC, wiring by others)
- B - Junction box (by others)
- C - Power wiring (by others)
- D - Lumenbeam Grande

On/Off Control (NO) - Wiring Detail - CE

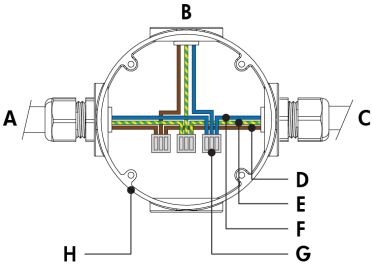

- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Terminal connector (by others)
- H - Junction box (by others)


On/Off Control (NO) - Wiring Detail - CE Class II

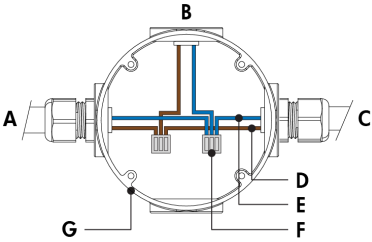

- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Line/Neutral
- F - Terminal connector (by others)
- G - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 88 to 100 watts per fixture, see Power Consumption table for details.

Lumentalk (LT)

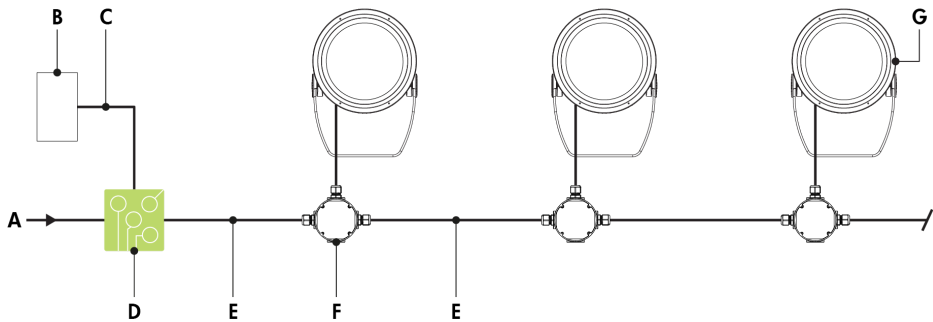

- A** - Power input (100-277V AC, wiring by others)
- B** - Dimmer/controller (order separately from Lumenpulse, or by others)
- C** - Data wiring (by others)
- D** - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- E** - Power wiring (by others)
- F** - Junction box (by others)
- G** - Lumenbeam Grande


Lumentalk (LT) - Wiring Detail - CE

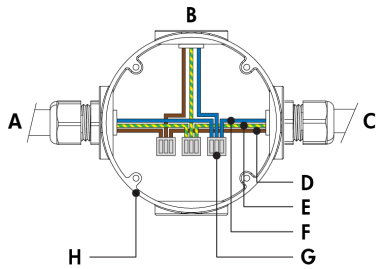

- A** - Power input (control over power line via Lumentalk system) or from previous fixture
- B** - To fixture
- C** - To next fixture
- D** - Line
- E** - Ground
- F** - Line/Neutral
- G** - Terminal connector (by others)
- H** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colours is 1 minute). Consult factory for applications that require additional capabilities.
- Consult factory for DALI Lumentalk applications.
- 1% minimum dimming value.
- 88 to 100 watts per fixture, see Power Consumption table for details.

1-10V Dimming (DIM)

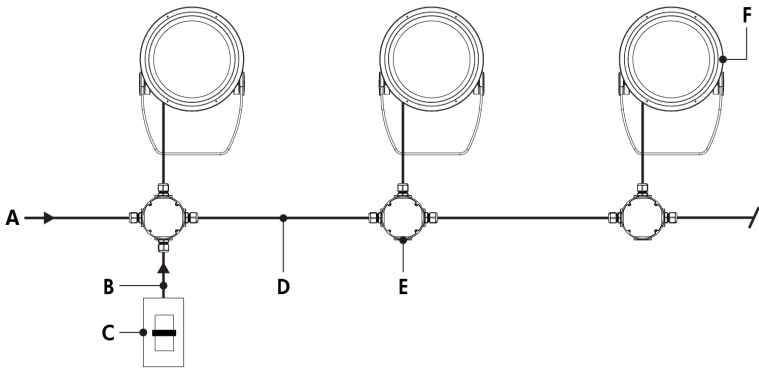


- A - Power input (100-277V AC, wiring by others)
- B - Data wiring (by others)
- C - Dimmer (by others)
- D - Power and data wiring (by others)
- E - Junction box (by others)
- F - Lumenbeam Grande

1-10V Dimming (DIM) - Wiring Detail - CE

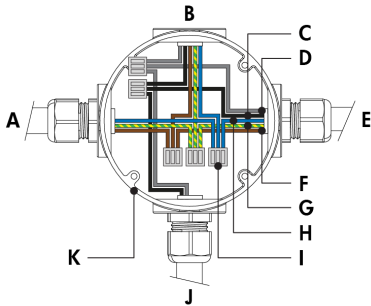

- A - Power input or from previous fixture
- B - To fixture
- C - 1-10 V +
- D - 1-10 V -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


1-10V Dimming (DIM) - Wiring Detail - CE Class II

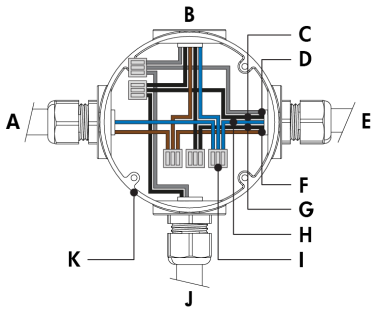

- A - Power input or from previous fixture
- B - To fixture
- C - 1-10 V + (black 2)
- D - 1-10 V -
- E - To next fixture
- F - Line
- G - Signal common (black 1)
- H - Neutral
- I - Terminal connector (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 1-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 1% minimum dimming value.
- 88 to 100 watts per fixture, see Power Consumption table for details.

DALI Dimming (DALI)

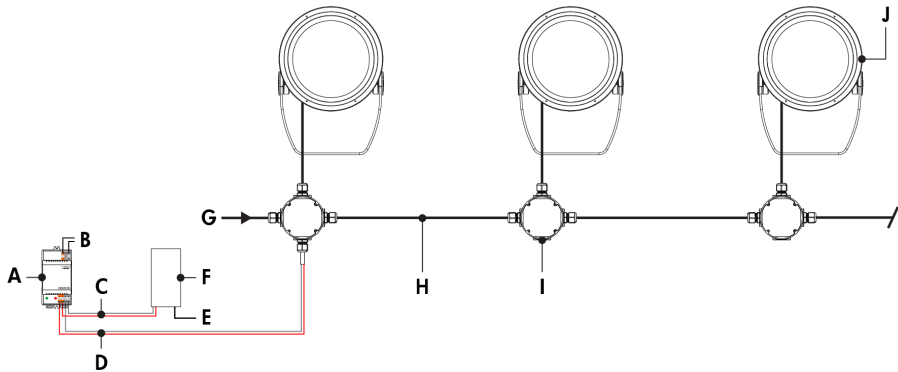


- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - Data output to fixture (wiring by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - DALI controller (by others)
- G - Power input (100-277V AC, wiring by others)
- H - Power and data wiring (by others)
- I - Junction box (by others)
- J - Lumenbeam Grande

DALI Dimming (DALI) - Wiring Detail - CE

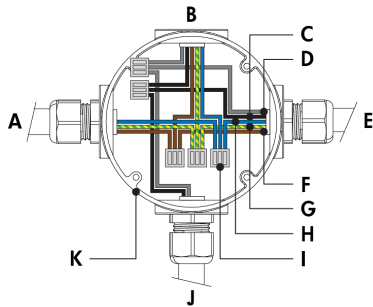

- A - Power input or from previous fixture
- B - To fixture
- C - DA +
- D - DA -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)


DALI Dimming (DALI) - Wiring Detail - CE Class II

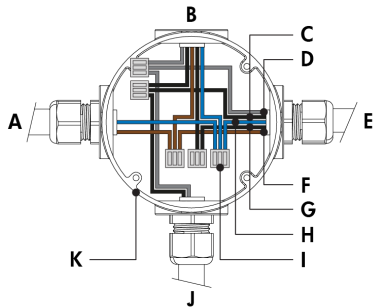

- A - Power input or from previous fixture
- B - To fixture
- C - DA + (black 2)
- D - DA -
- E - To next fixture
- F - Line
- G - Signal common (black 1)
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 1% minimum dimming value.
- 88 to 100 watts per fixture, see Power Consumption table for details.

Star Layout (DMX/RDM)

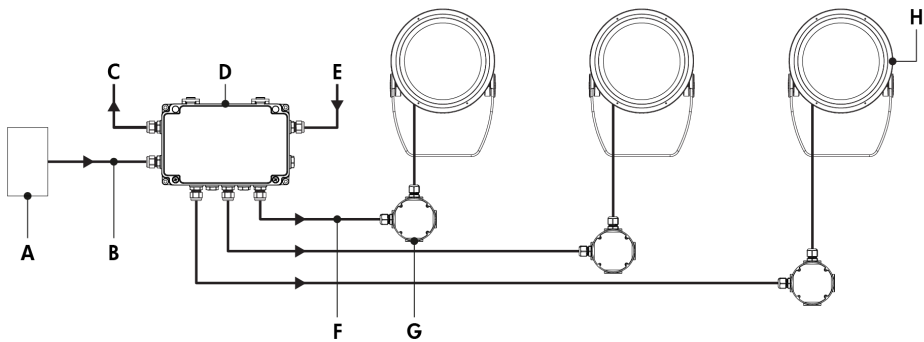


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenbeam Grande

Star Layout (DMX/RDM) - Wiring Detail - CE



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Star Layout (DMX/RDM) - Wiring Detail - CE Class II



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBG	10	16	18	21

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 1% minimum dimming value.
- 88 to 100 watts per fixture, see Power Consumption table for details.

Daisy Chain Layout (DMX/RDM)

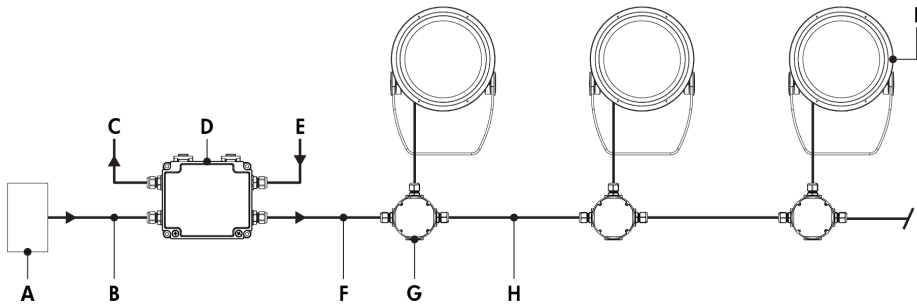


- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-DS
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Power and data wiring (by others)
- I** - Lumenbeam Grande

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First Or Middle Of Run) - CE

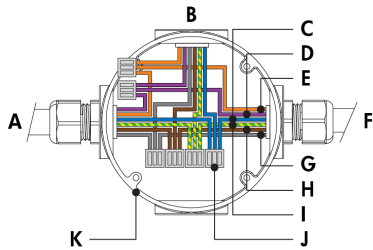


- A** - From CBX or previous fixture
- B** - To fixture
- C** - Neutral
- D** - Data +
- E** - Data -
- F** - To next fixture
- G** - Signal common
- H** - Line
- I** - Ground
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End Of Run) - CE




- A** - From CBX or previous fixture
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run) - CE Class II

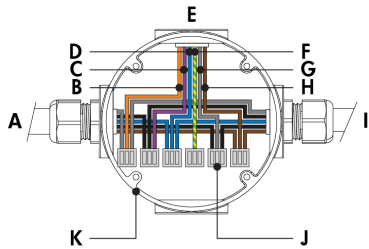

- A** - From CBX or previous fixture
- B** - Data -
- C** - Data +
- D** - Neutral
- E** - To fixture
- F** - Ground (do not connect)
- G** - Signal common
- H** - Line
- I** - To next fixture
- J** - Terminal connector (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run) - CE Class II



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBG	10	16	18	21

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 0.9 m cable length between fixture and next junction box for daisy chain layout.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 1% minimum dimming value.
- 88 to 100 watts per fixture, see Power Consumption table for details.

How to Order

Housing	Voltage	Colour and Colour Temperature ⁽¹⁾	Optic1	Optic2	Optical Option ^{(7) (9)}
LBG Lumenbeam™ Grande	100 100 Volts 120 120 Volts 208 208 Volts 220 220 Volts 240 240 Volts 277 277 Volts	22K 2200K 27K 2700K 30K 3000K 35K 3500K 40K 4000K 57K 5700K RD Red ⁽²⁾ GR Green ⁽²⁾ BL Blue ⁽²⁾	XN Extra Narrow 3° ⁽³⁾ VN Very Narrow 6° ⁽³⁾ NS Narrow Spot 10° ⁽³⁾ NF Narrow Flood 20° ⁽³⁾ M Medium 30° ⁽³⁾ FL Flood 40° ⁽³⁾ WFL Wide Flood 60° ^{(3) (4) (5)} VWFL Very Wide Flood 90° ^{(3) (4) (6)} NAS Narrow Asymmetric ⁽³⁾ WW Asymmetric Wallwash ⁽³⁾	XN Extra Narrow 3° ⁽³⁾ VN Very Narrow 6° ⁽³⁾ NS Narrow Spot 10° ⁽³⁾ NF Narrow Flood 20° ⁽³⁾ M Medium 30° ⁽³⁾ FL Flood 40° ⁽³⁾ WFL Wide Flood 60° ^{(3) (4) (5)} VWFL Very Wide Flood 90° ^{(3) (4) (6)} NAS Narrow Asymmetric ⁽³⁾ WW Asymmetric Wallwash ⁽³⁾	LSLH Linear Spread Lens Horizontal Distribution ⁽⁸⁾ LSLV Linear Spread Lens Vertical Distribution ⁽⁸⁾

Notes:

1. Consult factory for availability of static Royal Blue, Amber, 6500K and 90+ CRI.

2. Static colours made to order 8-10 weeks.

3. Factory installed, not interchangeable on site.

4. Cannot be combined with other optics.

5. A dome lens accessory is available, order separately. For compatibility, a WFL optic must be specified for the fixture.
6. Consult factory for photometric performance.

7. Optical options are factory installed and cannot be changed in the field.

8. Field adjustable spread lens optical accessory available, order separately.

9. Not available with WFL, VWFL, NAS and WW optics.

How to Order

Finish	Control	Option	Certification	Cable Length ⁽¹⁶⁾ ⁽²¹⁾	Cable Colour
BK Black Sandtex®	NO On/Off Control	SY Short Yoke	UL UL Compliant ⁽²⁰⁾	1M 1 m ⁽¹⁶⁾ ⁽²¹⁾	BK Black
BRZ Bronze Sandtex®	LT Lumentalk ⁽¹³⁾ ⁽¹⁴⁾	SRY Short Rotational Yoke ⁽¹⁷⁾	CE CE Compliant	5M 5 m	WH White ⁽²²⁾
SI Silver Sandtex®	DIM 1-10V Dimming	RY Rotational Yoke ⁽¹⁷⁾	CEII CE Compliant Class II Double Insulated	10M 10 m	
WH Smooth White	DALI DALI Dimming	3GV 3G ANSI C136.31-2010 Vibration Rating for Bridge Applications		15M 15 m	
BKTX Textured Black	DMX/RDM DMX/RDM Enabled ⁽¹⁵⁾ ⁽¹⁶⁾	CRC Corrosion-Resistant Coating ⁽¹⁸⁾ ⁽¹⁹⁾		20M 20 m	
BRZTX Textured Bronze Non-Metallic				30M 30 m	
GRATX Textured Medium Grey					
GRNTX Textured Green					
WHTX Textured White					
CC Custom Colour & Finish ⁽¹⁰⁾ ⁽¹¹⁾ ⁽¹²⁾					

Notes:

- 10.** Lumenpulse offers a wide selection of RAL CLASSIC (K7) colours with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colours, other RAL textures and glosses, or to match alternate colour charts. Final colour matching results may vary.

11. Setup charges apply for RAL colours. Consult factory for details.

12. Longer lead times can be expected for custom RAL colour finishes.

13. A Lumentranslator 2 (LTL2) and LumentalkID (LIDL2) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

14. Not available with Class II double insulated option.
- 15.** A control box (CBX) and LumenID (LID) must be specified.

16. Maximum of 1 m cable length for daisy chain DMX applications with CBX-DS.

17. Consult factory for applications with 3GV requirements.

18. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

19. Setup charges apply. Consult factory for details.

20. Consult North American specification sheets and installation instructions for UL wiring information.

21. 1 m cable length is standard unless otherwise specified.

22. Not available with CE or CEII certification options.