


Project Name

Qty

Type

Catalog / Part Number

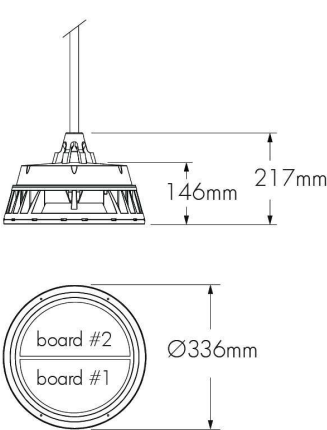

Front view

Bottom view

Photometric Summary (Discrete RGBW40K)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
XN (3°)	4,669	430,170
VN (6°)	5,079	351,460
NS (10°)	5,049	189,556
NF (20°)	4,425	37,332
M (30°)	4,483	18,931
FL (40°)	4,465	12,309
WFL (60°)	4,599	4,775
Asymmetric		
NAS	3,829	63,368 (@2.5°)
WW	4,303	18,755 (@5°)

Based on RGBW40K full output.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Photometric Summary (Opticolor+ MRGBWP)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
NS (10°)	4,891	86,649
NF (20°)	4,375	28,226
M (30°)	4,255	15,349
FL (40°)	4,405	11,899
WFL (60°)	4,233	4,330

Based on MRGBWP full output, white set to 3000K.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Description

The Lumenbeam Grande Pendant Colour Changing is an IP66-rated suspended luminaire for applying white or coloured light to indoor areas with high ceilings or large outdoor spaces. The system offers numerous options, including optics for flood or accent lighting; a choice of colour mixing; various stem lengths, accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Colours and Colour Temperature (Discrete)	RGB: RGB RGBW30K: RGB + White 3000K RGBW40K: RGB + White 4000K RGBA: RGB + Amber
Colours and Colour Temperature (Opticolor™)	MRGBA: Opticolor Cluster with MRGBA (Red, Green, Blue, Amber)
Colours and Colour Temperature (Opticolor+™)	MRGBWP: MRGBWP With Opticolor+™ (Red, Green, Blue and Configurable White 2700-6500K) MRGBWP Typical Colour Rendering: 2700K-5000K: 90+ CRI 5000K-6500K: 85+ CRI
Mounting Length	12: 305 mm 24: 610 mm 36: 914 mm 48: 1219 mm
Optics (Nominal Distribution)	XN: XN (4° or 5°) VN: VN (6°) NS: NS (10°) NF: NF (20°) M: M (30°) FL: FL (40°) WFL: WFL (60°) VWFL: VWFL (90°) NAS: NAS (Narrow Asymmetric) WW: WW (Asymmetric Wallwash)
Optical Option	LSLH: Linear Spread Lens Horizontal Distribution LSLV: Linear Spread Lens Vertical Distribution
Option	CRC: Corrosion-Resistant Coating for Hostile Environments


Photometric Summary (Opticolor MRGBA)

Symmetric

	Delivered output (lm)	Intensity (peak cd)
NS (10°)	4,754	84,223
NF (20°)	4,253	27,435
M (30°)	4,136	14,919
FL (40°)	4,282	11,566
WFL (60°)	4,114	4,209

Based on MRGBA full output.
Photometric performance is measured externally in compliance with IESNA LM-79-24.
Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Optic

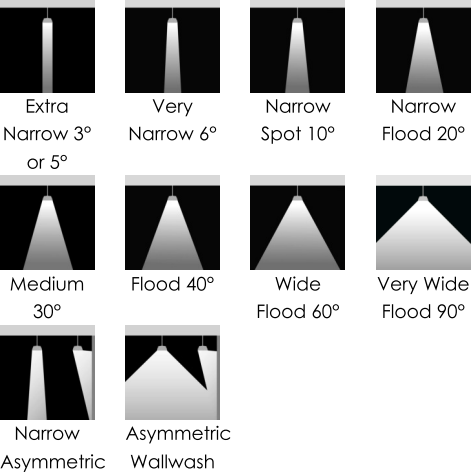

Colour and Colour Temperature



Control



Ratings

IP66 fixture IP54 canopy IK09

Certifications



Cable Colour	BK: Black WH: White
Power Consumption	86 to 100 W (see Power Consumption table for details)
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output (Discrete)	5,143 lm (RGB full output, VN 6°, DMX/RDM) 4,977 lm (RGBW30K full output, VN 6°, DMX/RDM) 5,079 lm (RGBW40K full output, VN 6°, DMX/RDM) 4,149 lm (RGBA full output, VN 6°, DMX/RDM)
Maximum Delivered Output (Opticolor)	4,754 lm (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Output (Opticolor+)	4,891 lm (MRGBWP full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Discrete)	357,498 cd at nadir (RGB full output, XN 5°, DMX/RDM) 421,567 cd at nadir (RGBW30K full output, XN 3°, DMX/RDM) 430,170 cd at nadir (RGBW40K full output, XN 3°, DMX/RDM) 351,449 cd at nadir (RGBA full output, XN 3°, DMX/RDM)
Maximum Delivered Intensity (Opticolor)	84,223 cd at nadir (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Opticolor+)	86,649 cd at nadir (RGBW30K full output, XN 3°, DMX/RDM)
Illuminance at Distance (Discrete)	Minimum 1 lx at 600 m (RGB full output, XN 5°, DMX/RDM) Minimum 1 lx at 652 m (RGBW30K full output, XN 3°, DMX/RDM) Minimum 1 lx at 659 m (RGBW40K full output, XN 3°, DMX/RDM) Minimum 1 lx at 595 m (RGBA full output, XN 3°, DMX/RDM)
Illuminance at Distance (Opticolor)	Minimum 1 lx at 290 m (MRGBA full output, NS 10°, DMX/RDM)
Illuminance at Distance (Opticolor+)	Minimum 1 lx at 294 m (MRGBWP full output, NS 10°, DMX/RDM)
Lumen Maintenance	L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported) L70 > 150,000 hrs Ta 25 °C (projected)* L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported) L90 = 55,400 hrs Ta 25 °C (projected)* *Estimated based on in-situ case temperature and LM-80 report
Physical	
Housing Material	Low copper content high pressure die-cast aluminium
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	9.98 kg
Electrical and Control	
Voltage	100 to 277 volts
Fixture Cable	Power and data cable goes through stem
Conductors	3C: 3 x 1,5 mm ² (LT control) 5C: 5 x 1,5 mm ² (DALIT8 control) 6C: 3 x 1,5 mm ² / 3 x 0,20 mm ² (DMX/RDM control)
Inrush Current (Peak)	55A @230VAC

Control	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Control
Resolution (DMX/RDM)	Per board or fixture (configured with LumenID V3 software), 8-bit or 16-bit, 3 channels (RGB) or 4 channels (MRGBA and MRGBWP)

Environmental


Storage Temperature	-40 °C to 70 °C (device must reach start-up temperature value before operating)
Start-up Temperature	-25 °C to 50 °C
Operating Temperature	-40 °C to 50 °C
Ingress Protection Rating	IP66 fixture (wet location rated) IP54 canopy (suitable for wet location, not suitable for water jet)
Impact Resistance Rating	IK09

Accessories (Order Separately)

Optical Accessories	Lumenbeam Grande Snoot, Lumenbeam Grande Snoot Wide, Lumenbeam Grande Visor, Lumenbeam Grande Linear Spread Lens Adjustable, Lumenbeam Grande Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Lumenscene™ (LSC), Pharos® Lighting Control Kit (PHAROS)
Diagnostic and Addressing Tools	LumenID (LID)

Colour Point Information

MRGBWP

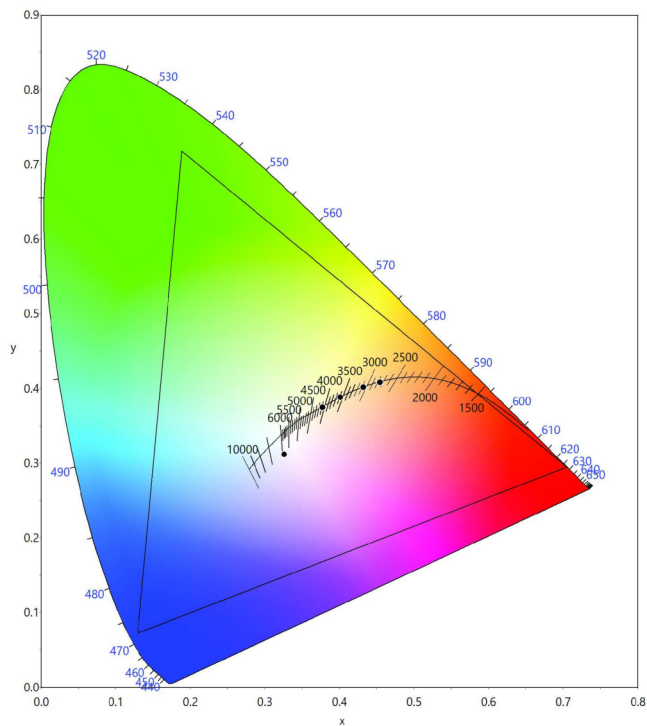

Dominant Wavelength and Chromaticity

	Dominant Wavelength	Chromaticity	
		Cx	Cy
Red	~628nm	0.7050	0.2949
Green	~531nm	0.1885	0.7178
Blue	~471nm	0.1298	0.0726
Amber	~591nm	0.5755	0.4126

	Cx	Cy
MRGBWP Full On	0.3261	0.3121
27K Optidrive	0.4545	0.4081
30K Optidrive	0.4318	0.4017
35K Optidrive	0.4010	0.3883
40K Optidrive	0.3773	0.3747


Values measured from Steady State Full on Optidrive @ 25°C ambient conditions.

Power Consumption

Control Option	Colour and Colour Temperature	Optic	Wattage (W)
LT DMX/RDM DALI8	RGB	XN/NAS	100
		VN/NS/NF/M/FL/WFL/VWFL/WW	86
LT DMX/RDM DALI8	RGBW, RGBA	XN/NAS	96
		VN/NS/NF/M/FL/WFL/VWFL/WW	90
LT DMX/RDM DALI8	MRGBA, MRGBWP	NS/NF/M/FL/WFL/VWFL	100


Mounting Types

SCAN - Standard Straight Stem Canopy

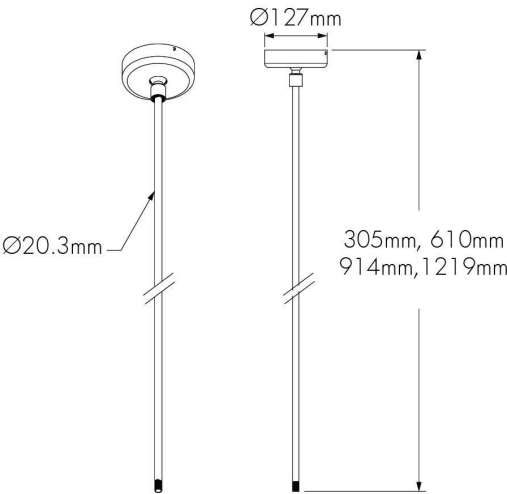

Not suitable when fixture is exposed to wind.
Suitable for under canopy installation only.
No vibration rating.

ACAN - Adjustable Sloped Ceiling Canopy

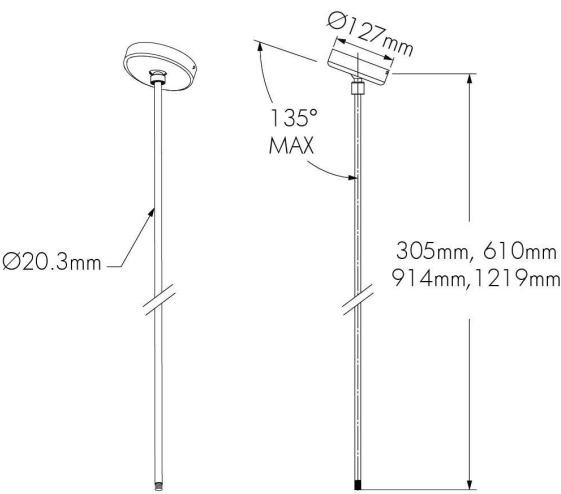


Not suitable when fixture is exposed to wind.
Suitable for under canopy installation only.
No vibration rating.

Optical Options – Discrete

LSLH - Linear Spread Lens Horizontal Distribution



LSLV - Linear Spread Lens Vertical Distribution



Beam Angles

Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	8° x 50°
NS	9° x 56°
NF	17° x 57°
M	27° x 68°
FL	37° x 74°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.


Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Optical Options - Opticolor™ and Opticolor+

LSLH - Linear Spread Lens Horizontal Distribution



LSLV - Linear Spread Lens Vertical Distribution



Beam Angles


Optic installed in fixture	Beam angle with LSLH/LSLV
NS	11° x 61°
NF	19° x 66°
M	26° x 70°
FL	31° x 71°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).


Optical Accessories (Order Separately)

SN - Snoot

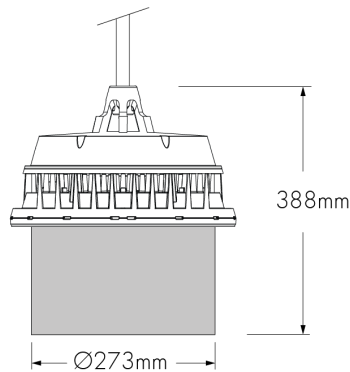


LBGSN-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

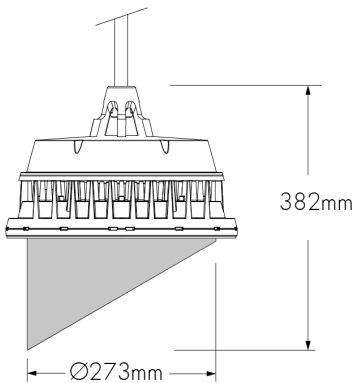


LBGVS-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

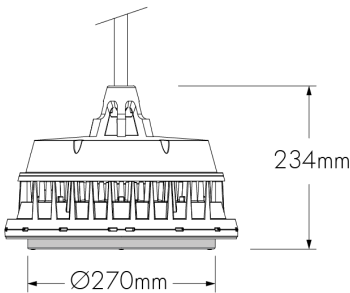


LBGWG-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

SNW - Snoot Wide

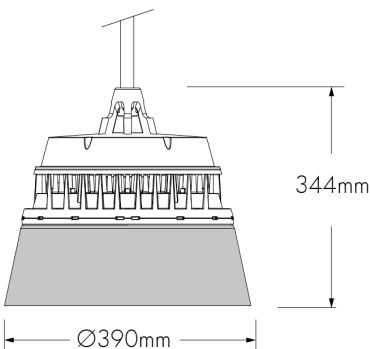

LBGSNW-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable

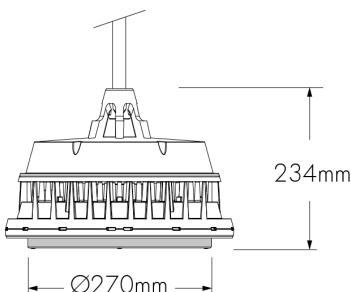

LBGLSLA-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBGSNLSLA	N/A*	LBGVLSLA
Wire guard	LBGSNWG	N/A	LBGVSWG

Accessory combinations must be ordered together on a single line
Ex: A snoot + wire guard combination order code is **LBGSNWG-FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.
*Consult factory for a linear spread lens adjustable + snoot wide combination.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147683

Diffuser Lens 2 (2 Notches)




147684

Diffuser Lens 3 (3 Notches)




147685

Diffuser Lens 4 (4 Notches)




147686

Diffuser Lens 5 (5 Notches)



147687

Diffuser Lens 6 (6 Notches)



147688

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-**FINISH**-LBALK **LBM/LBMP**: LBMLSAL-**FINISH**-LBALK **LBL/LBLP**: LBLLSLA-**FINISH**-LBALK **LBG/LBGP**: LBGLSLA-**FINISH**-LBALK **LBX/LBXP**: LBXLSLA-**FINISH**-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

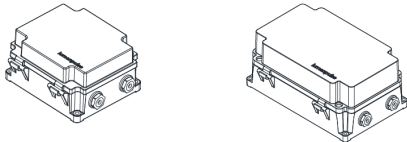

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

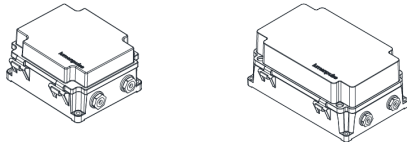

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Control Systems (Order Separately)

Lumenscene



The Lumenscene, a user-friendly DMX/RDM lighting controller that includes eight preconfigured scene changes and can be programmed via RDM.

PHAROS - Pharos® Kit



The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)


LID - LumenID




LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

Resolution Details (Discrete)

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:

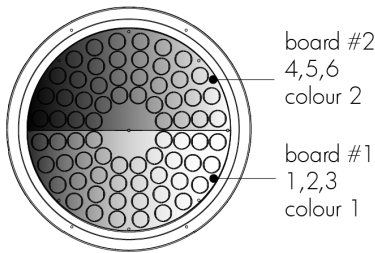


RGB colour mixing option

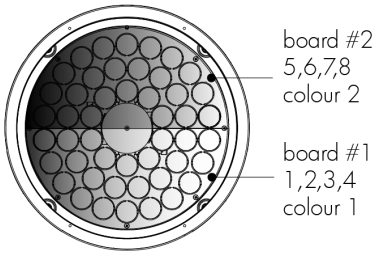


RGBW30K, RGBW40K and RGBA colour mixing options.

Resolution Per Fixture: Each Fixture Is Addressed Independently
DMX Addresses:



RGB colour mixing option




RGBW30K, RGBW40K and RGBA colour mixing options.

Fixture resolution can be configured on-site within the LumenID V3 software.


Resolution Details (Opticolor and Opticolor+)

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:

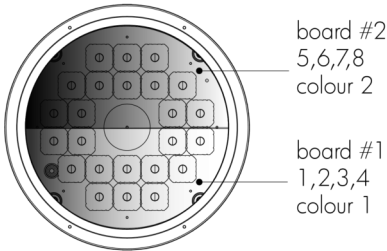

MRGBA and MRGBWP colour mixing options

Resolution Per Fixture: Each Fixture Is Addressed Independently
DMX Addresses:

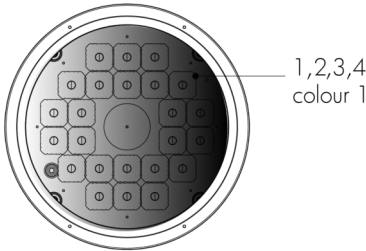

MRGBA and MRGBWP colour mixing options


Typical Wiring Diagrams

Wiring Colour Code

CE Colour Code	USE
Yellow/Green	Ground
Brown	Line
Blue	Line/Neutral
Black or Purple	1-10V / Data +
Grey or Orange	1-10V / Data -
Grey	Signal common (DMX/RDM only)


CE Class II Colour Code		USE
All other controls	DMX/RDM	
Brown	Brown	Line
Blue	Blue	Line/Neutral
Black 1	Grey	Signal common (DMX/RDM only)
Black 2	Black or Purple	1-10V / Data +
Grey	Grey or Orange	1-10V / Data -
N/A	Yellow/Green	Ground (do not connect)

Lumentalk (LT)

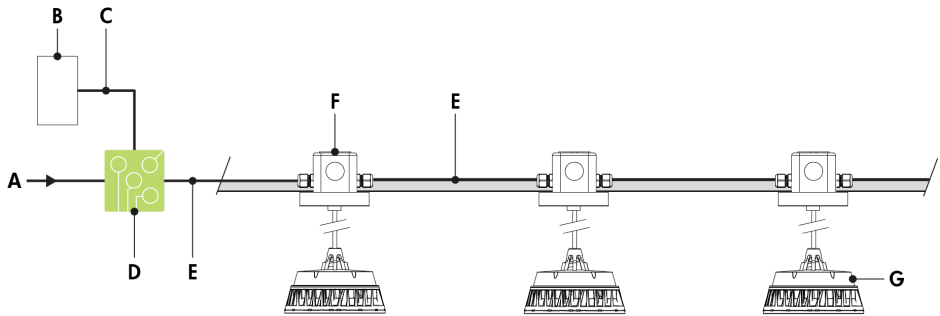

- A - Power input (100-277V AC, wiring by others)
- B - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DMX)
- E - Power wiring (by others)
- F - Junction box (by others)
- G - Lumenbeam Grande Pendant


Lumentalk (LT) - Wiring Detail - CE

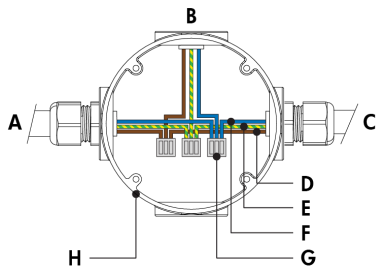

- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Terminal connector (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colours is 1 minute). Consult factory for applications that require additional capabilities.
- 86 to 100 watts per fixture, see Power Consumption table for details.

Star Layout (DMX/RDM)

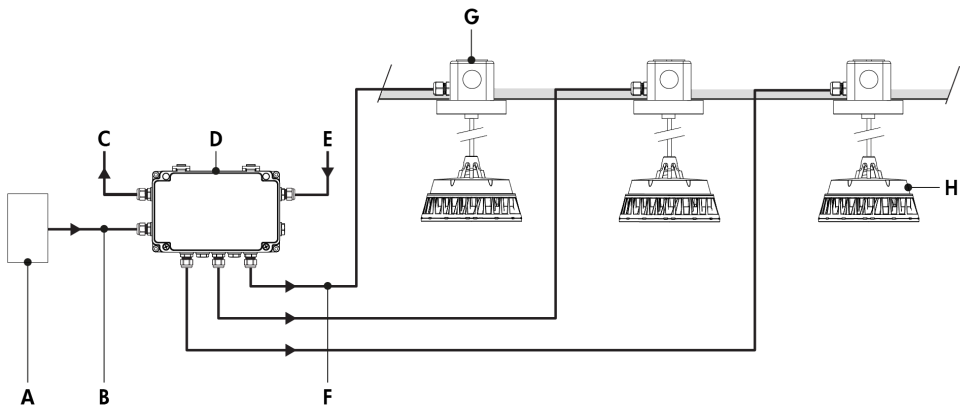


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenbeam Grande Pendant

Star Layout (DMX/RDM) - Wiring Detail - CE



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Star Layout (DMX/RDM) - Wiring Detail - CE Class II



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBGP	10	16	18	21

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- RGB colour mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA and MRGBWP colour mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 86 to 100 watts per fixture, see Power Consumption table for details.

Daisy Chain Layout (DMX/RDM)

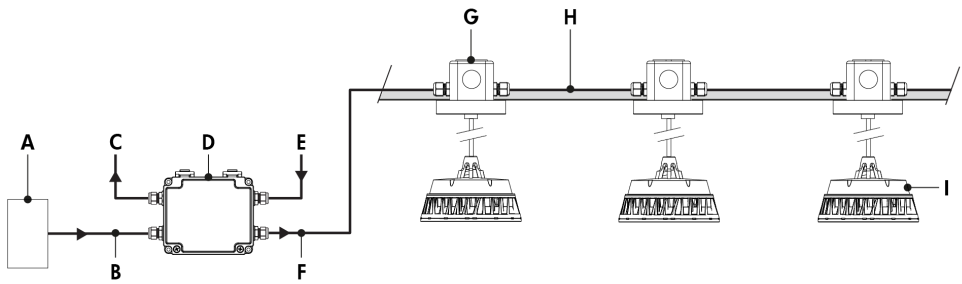


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Power and data wiring (by others)
- I - Lumenbeam Grande Pendant

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First Or Middle Of Run) - CE

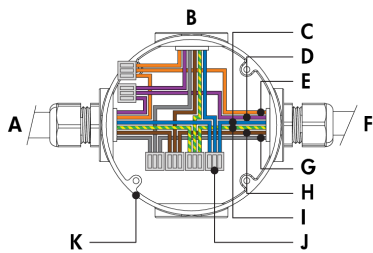


- A - From CBX or previous fixture
- B - To fixture
- C - Neutral
- D - Data +
- E - Data -
- F - To next fixture
- G - Signal common
- H - Line
- I - Ground
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End Of Run) - CE




- A - From CBX or previous fixture
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run) - CE Class II

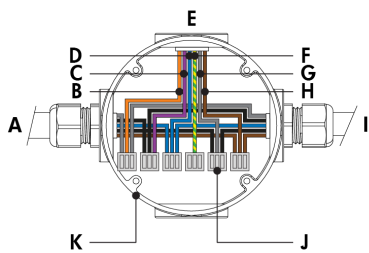

- A - From CBX or previous fixture
- B - Data -
- C - Data +
- D - Neutral
- E - To fixture
- F - Ground (do not connect)
- G - Signal common
- H - Line
- I - To next fixture
- J - Terminal connector (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run) - CE Class II



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground (do not connect)
- H - Line
- I - Signal common
- J - Terminal connector (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBGP	10	16	18	21

Based on 16A maximum, 1,5 mm² cable, fixtures spaced 3 m on centre, first fixture 15 m from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Run length calculations are based on a voltage drop of no more than 25V.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 0.9 m cable length between fixture and next junction box for daisy chain layout.
- RGB colour mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA and MRGBWP colour mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 86 to 100 watts per fixture, see Power Consumption table for details.

DALI 2 T8 (DALIT8)

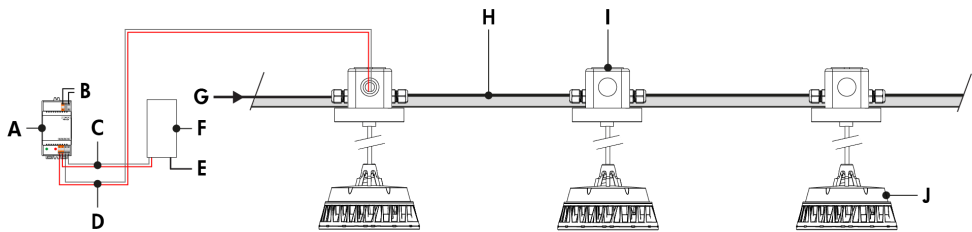


- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - Data output to fixture (wiring by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - DALI controller (by others)
- G - Power input (100-277V AC, wiring by others)
- H - Power and data wiring (by others)
- I - Junction box (by others)
- J - Lumenbeam Grande Pendant

DALI 2 Type 8 (DALIT8) - Wiring Detail - CE

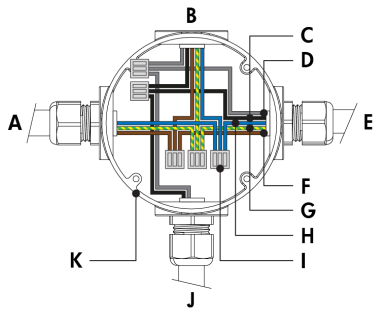

- A - Power input or from previous fixture
- B - To fixture
- C - DA +
- D - DA -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)

DALI 2 Type 8 (DALIT8) - Wiring Detail - CE Class II

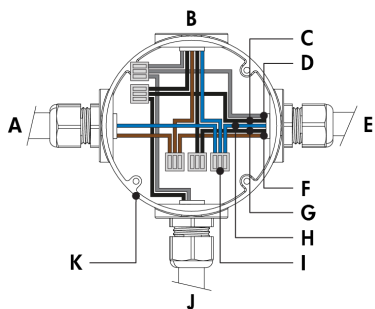

- A - Power input or from previous fixture
- B - To fixture
- C - DA + (black 2)
- D - DA -
- E - To next fixture
- F - Line
- G - Signal common (black 1)
- H - Neutral
- I - Terminal connector (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- The Lumenbeam responds to RGBWAF for colour controls and Tc for dim to warm and tunable white.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 86 to 100 watts per fixture, see Power Consumption table for details.

How to Order

Housing	Voltage	Colour and Colour Temperature	Optic1	Optic2	Mounting Type	Mounting Length ⁽¹⁴⁾	Optical Option ⁽¹⁵⁾ ⁽¹⁷⁾	Finish	Control
LBGP Lumenbeam™ Grande Pendant	100 100 Volts	RGB	XN Extra Narrow 3° or 5° ⁽⁷⁾ ⁽⁸⁾ ⁽⁹⁾	XN Extra Narrow 3° or 5° ⁽⁷⁾ ⁽⁸⁾ ⁽⁹⁾	SCAN Straight Stem Canopy	12 305 mm	LSLH Linear Spread Lens Horizontal Distribution ⁽¹⁶⁾	BK Black Sandtex®	LT Lumentalk ⁽²¹⁾ ⁽²²⁾
	120 120 Volts	RGBW30K RGB + White 3000K ⁽¹⁾	VN Very Narrow 6° ⁽⁸⁾ ⁽⁹⁾	VN Very Narrow 6° ⁽⁸⁾ ⁽⁹⁾	ACAN Adjustable Sloped Ceiling Canopy	24 610 mm	LSLV Linear Spread Lens Vertical Distribution ⁽¹⁶⁾	BRZ Bronze Sandtex®	DMX/RDM DMX/RDM Enabled ⁽²³⁾
	208 208 Volts	RGBW40K RGB + White 4000K ⁽¹⁾	NS Narrow Spot 10° ⁽⁸⁾	NS Narrow Spot 10° ⁽⁸⁾		36 914 mm		SI Silver Sandtex®	DALIT8 DALI 2 T8 Control ⁽⁶⁾ ⁽²⁴⁾
	220 220 Volts	RGBA RGB + Amber	NF Narrow Flood 20° ⁽⁸⁾	NF Narrow Flood 20° ⁽⁸⁾		48 1219 mm		WH Smooth White	
	240 240 Volts	MRGBA Opticolor with MRGBA Amber ⁽²⁾ ⁽⁵⁾	M Medium 30° ⁽⁸⁾ ⁽¹⁰⁾	M Medium 30° ⁽⁸⁾ ⁽¹⁰⁾				BKTX Textured Black	
	277 277 Volts	MRGBWP MRGBW With Opticolor+™ ⁽¹⁾ ⁽²⁾ ⁽⁴⁾ ⁽⁵⁾ ⁽⁶⁾	FL Flood 40° ⁽⁸⁾	FL Flood 40° ⁽⁸⁾				BRZTX Textured Bronze Non-Metallic	
			WFL Wide Flood 60° ⁽⁸⁾ ⁽¹¹⁾	WFL Wide Flood 60° ⁽⁸⁾ ⁽¹¹⁾				GRATX Textured Medium Grey	
			VWFL Very Wide Flood 90° ⁽⁸⁾ ⁽¹¹⁾ ⁽¹²⁾ ⁽¹³⁾	VWFL Very Wide Flood 90° ⁽⁸⁾ ⁽¹¹⁾ ⁽¹²⁾ ⁽¹³⁾				GRNTX Textured Green	
			NAS Narrow Asymmetric ⁽⁸⁾ ⁽⁹⁾	NAS Narrow Asymmetric ⁽⁸⁾ ⁽⁹⁾				WHTX Textured White	
			WW Asymmetric Wallwash ⁽⁸⁾ ⁽⁹⁾	WW Asymmetric Wallwash ⁽⁸⁾ ⁽⁹⁾				CC Custom Colour & Finish ⁽¹⁸⁾ ⁽¹⁹⁾ ⁽²⁰⁾	

Notes:

1. Consult factory for the availability of more colour and CCT options (e.g. royal blue).

2. Not available with XN, VN, NAS and WW optics.

3. Consult factory for availability of other colour options such as Royal Blue.

4. MRGBWP can be configured to MRGB via RDM, consult factory for more details.

5. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumentalkID, LumentalkID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 1800K-8000K.

6. Consult factory for DALI8 applications with MRGBWP and a CCT other than 3000K.

7. Nominal distribution is 3° for RGBW30K, RGBW40K and RGBA colour options, and 5° for RGB.

8. Factory installed, not interchangeable on site.

9. Not available with MRGBA and MRGBWP colour temperature options.

10. Cannot be combined with other optics when RGB, RGBW30K, RGBW40K and RGBA colour temperatures are specified.

11. Cannot be combined with other optics.

12. Available with MRGBA and MRGBWP colour temperature options only.
13. Consult factory for photometric performance.

14. Consult factory for custom stem lengths.

15. Optical options are factory installed and cannot be changed in the field.

16. Field adjustable spread lens optical accessory available, order separately.

17. Not available with WFL, VWFL, NAS and WW optics.

18. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colours with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colours, other RAL textures and glosses, or to match alternate colour charts. Final colour matching results may vary.

19. Setup charges apply for RAL colours. Consult factory for details.

20. Longer lead times can be expected for custom RAL colour finishes.

21. A Lumentranslator 2 (LTL2) and LumentalkID (LIDL1) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

22. Not available with Class II double insulated option.

23. A control box (CBX) and LumenID (LID) must be specified.

24. DALI 2 T8 controller required, provided by others. DALI2 T8 control uses a single DALI short address.

How to Order

Option	Certification	Cable Colour
CRC Corrosion-Resistant Coating ⁽²⁵⁾ ⁽²⁶⁾	UL UL Compliant ⁽²⁷⁾ CE CE Compliant CEII CE Compliant Class II Double Insulated	BK Black WH White ⁽²⁸⁾

Notes:

25. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

26. Setup charges apply. Consult factory for details.

27. Consult North American specification sheets and installation instructions for UL wiring information.

28. Not available with CE or CEII certification options.