

Upline 600
With high performance LEDs,
CRI: > 80, Colour tolerance: max. 2 SDCM
Service life: L90/B10 > 50 000 h
protection class I, IP67 , IK10
corrosion-resistant die cast aluminium housing AlSi12,
double powder coated,
precise PMMA optics,
tempered safety glass flush with frame,
for loads up to max. 2000 kg (according to
DIN EN 60598-2-13), silicon gasket,
V4A stainless steel cover frame and 2 screws,
M16 stainless steel cable gland,
1 m cable H07RN-F3G1,
with polypropylene recess housing,
integral potted driver (AC/DC)

Upline 600, wall washer

Part number	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 650 016 009	3.6 kg	6 x LED 2.5 W	1059 lm	C 0 – 180	C 90 – 270
		(15 W)		12°	108°
		warm white (3000 K)			

Part number	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 650 015 009	3.6 kg	6 x LED 2.5 W	1112 lm	C 0 – 180	C 90 – 270
		(15 W)		12°	108°
		neutral white (4000 K)			

Upline 600, asymmetrical beam

Part number	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 650 016 089	3.6 kg	6 x LED 2.5 W	1054 lm	36°
		(15 W)		
		warm white (3000 K)		

Part number	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 650 015 089	3.6 kg	6 x LED 2.5 W	1107 lm	36°
		(15 W)		
		neutral white (4000 K)		

Part number	Description
. 1..	Dimmable luminaire (DALI)
. 2..	Dimmable luminaire (1-10 V)



The plastic recess housing can be supplied separately before the luminaire installation.


Accessories Upline 600, wall washer and asymmetrical beam

Part number	Description
226 0 161 000	Cast-resin connection box , for single connection to luminaire or for through wiring with buried cable. For luminaires supplied with cable and installation sleeve (recess box).

Accessories Upline 600, wall washer




Part number	Description
126 0 350 940	Louvre , stainless steel, to avoid glare

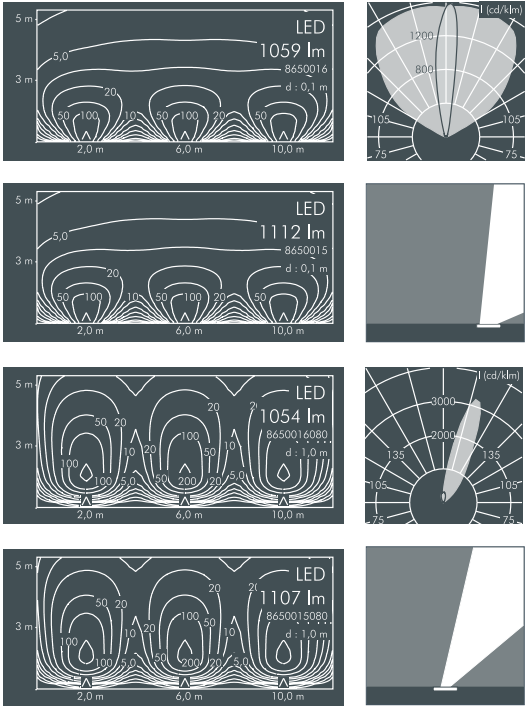

LED (see page 247)
Luminaires available in 2700 K and other colour temperatures upon request


Upline 600 orientation luminaire

With linear LED module (Zhaga),
CRI: > 80, Colour tolerance: max. 2 SDCM
Service life: L90/B10 > 50 000 h
protection class I, IP67 , IK10
corrosion-resistant die cast aluminium housing AlSi12,
double powder coated,
tempered safety glass flush with frame,
for loads up to max. 2000 kg (according to
DIN EN 60598-2-13), silicon gasket,
V4A stainless steel cover frame and 2 screws,
M16 stainless steel cable gland,
1 m cable H07RN-F3G1,
with polypropylene recess housing,
integral potted driver (AC/DC)




Upline 600 orientation luminaire

Part number	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 650 016 099	3.6 kg	2 x LED linear modules 9.5 W (19 W) warm white (3000 K)	566 lm	C 0 – 180 108°	C 90 – 270 112°

Part number	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 650 015 099	3.6 kg	2 x LED linear modules 9.5 W (19 W) neutral white (4000 K)	584 lm	C 0 – 180 108°	C 90 – 270 112°

Part number	Description
. 1 . .	Dimmable luminaire (DALI)
. 2 . .	Dimmable luminaire (1-10 V)

The plastic recess housing can be supplied separately before the luminaire installation.



Accessories Upline 600 orientation luminaire

Part number	Description
226 0 161 000	Cast-resin connection box , for single connection to luminaire or for through wiring with buried cable. For luminaires supplied with cable and installation sleeve (recess box).

LED (see page 247)

Luminaires available in 2700 K and other colour temperatures upon request

