



Norms: EN 60598-1, EN 60598-2-1



IP 40

960°C

230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Suspended.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, RG1, CRI>80, MacAdam Step <3, 70.000h lifetime (@L90, B10, Ta25 °C).

Optical System: Diffuser: Opal Silicon. (not included)

Control Gear: LED driver, 220-240VAC-50/60Hz.

Wiring: Internal through-wiring included.

Materials: Body: Extruded aluminium.

Surface Finish: Powder coated.

Curved Module | 1/16 (22,5) | 80% (Direct - Diffuser not included) + 20% (Indirect)



LED	W	Lm Output	L (mm)	D(mm)	kg	Left Module (HF)	Right Module (HF)	Left Module (DALI)	Right Module (DALI)
	56	5072	1548	Ø7936	4,4	90547.L011.E	90547.R011.E	90547.L011.H	90547.R011.H

Add suffix to order: SRT - 00000.0000.0.0049 MID/END - 00000.0000.0.0098

Curved Module | 1/8 (45) | 80% (Direct - Diffuser not included) + 20% (Indirect)



LED	W	Lm Output	L (mm)	D(mm)	kg	Left Module (HF)	Right Module (HF)	Left Module (DALI)	Right Module (DALI)
	42	3623	1120	Ø2926	3,4	90548.L008.E	90548.R008.E	90548.L008.H	90548.R008.H
	56	5072	1531	Ø4000	4,5	90548.L011.E	90548.R011.E	90548.L011.H	90548.R011.H
	79	7245	2215	Ø5789	6,2	90548.L016.E	90548.R016.E	90548.L016.H	90548.R016.H

Add suffix to order: SRT - 00000.0000.0.0049 MID/END - 00000.0000.0.0098

Curved Module | 1/4 (90) | 80% (Direct - Diffuser not included) + 20% (Indirect)



LED	W	Lm Output	L (mm)	D(mm)	kg	Left Module (HF)	Right Module (HF)	Left Module (DALI)	Right Module (DALI)
	42	3623	1057	Ø1494	4,0	90549.L008.E	90549.R008.E	90549.L008.H	90549.R008.H
	52	4709	1310	Ø1853	4,2	90549.L010.E	90549.R010.E	90549.L010.H	90549.R010.H
	71	6521	1816	Ø2569	5,7	90549.L014.E	90549.R014.E	90549.L014.H	90549.R014.H
	79	7245	2069	Ø2926	6,4	90549.L016.E	90549.R016.E	90549.L016.H	90549.R016.H
	112	10143	2828	Ø4000	8,9	90549.L022.E	90549.R022.E	90549.L022.H	90549.R022.H


Add suffix to order: SRT - 00000.0000.0.0049 MID/END - 00000.0000.0.0098

Example code for order: 90547.L011.H.0049 (SRT(DALI)) + 90548.L008.H0098 (MID/END(DALI)) + D (COLOUR/FINISH) + 3000 + 985705 + 923000 + 932000 + 978600 + 940000 + 9129031(x2) (OPTIONS)

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.



Curved Module | 1/2 (180°) | 80% (Direct - Diffuser not included) + 20% (Indirect)

LED	W	Lm Output	L (mm)	D(mm)	kg	Left Module (HF)	Right Module (HF)	Left Module (DALI)	Right Module (DALI)
	42	3623	777	Ø777	3,3	90550.L008.E	90550.R008.E	90550.L008.H	90550.R008.H
	60	5434	1136	Ø1136	4,9	90550.L012.E	90550.R012.E	90550.L012.H	90550.R012.H
	79	7245	1494	Ø1494	6,4	90550.L016.E	90550.R016.E	90550.L016.H	90550.R016.H
	101	9056	1853	Ø1853	8,2	90550.L020.E	90550.R020.E	90550.L020.H	90550.R020.H

Add suffix to order:  SRT - 00000.0000.0.0049  MID/END - 00000.0000.0.0098

Linea Module | 80% (Direct - Diffuser not included) + 20% (Indirect)

LED	W	Lm Output	L (mm)	D(mm)	kg	HF	DALI
	42	4083	1124	-	3,0	90542.L008.E	90542.L008.H
	52	5457	1405	-	3,7	90542.L010.E	90542.L010.H
	60	6210	1686	-	4,4	90542.L012.E	90542.L012.H
	71	7349	1967	-	5,0	90542.L014.E	90542.L014.H
	79	8165	2248	-	5,9	90542.L016.E	90542.L016.H
	90	9390	2529	-	6,6	90542.L018.E	90542.L018.H
	101	10494	2810	-	7,3	90542.L020.E	90542.L020.H


Add suffix to order:  SRT - 00000.0000.0.0049  MID/END - 00000.0000.0.0098

- To complete the product, add suspension, current supply cable and ceiling rose. Please order separately.
- To complete a line, start kit will be necessary. Please order separately.
- Dimensions without end caps, please add 26mm to complete the line.
- Diffuser not included. Please order separately.
- For help in the product's configuration, please check (CONFIGURATOR.INDELAGEGROUP.COM).

COLOUR / FINISH

Code	Description
 W	White
 G	Grey
 B	Black
 U	Blue
 V	Green
 T	Yellow
 K	Red
 N	Jungle
 D	Golden eye
 O	Sahara
 L	Autumn
 R	Rusty chain
 C	Pure chocolate
 1	Mist
 9	Dark rock
 I	Carbon

DIMENSIONS

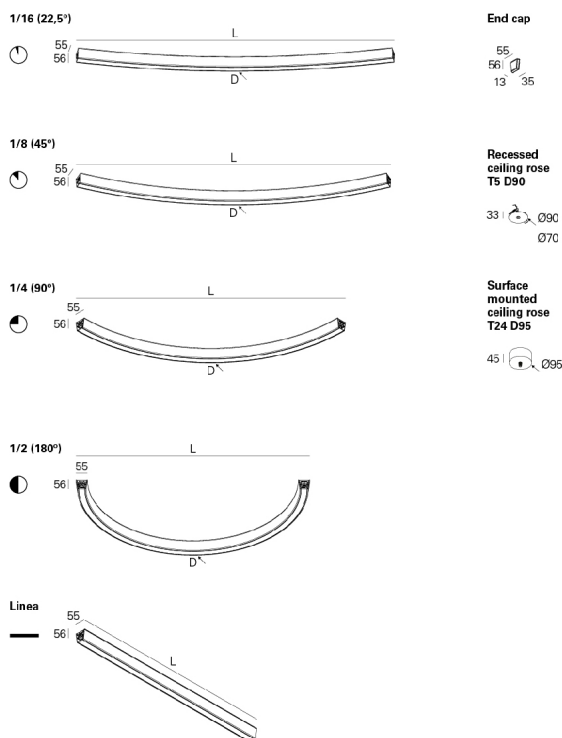

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

OPTIONS

bFLEX



L5 m
L15 m
L30 m

Order Code

985705

985715

985730

Colour temperature



3000K

Order Code

3000

Start kit



Start Kit - Start / End

• Two end caps included.

Order Code

923000

Body connector



Body connector (x1)

Order Code

932000

Ceiling rose



Ceiling rose
Surface T24 D95
Recessed T5 D90

• To order this option please indicate the required colour for the ceiling rose.

Order Code

978600

9713

Current supply cable



Transparent current cable 0,75 mm2

3 x 0,75 mm2

L1500

L3000

L6000

5 x 0,75 mm2

L1500

L3000

L6000

Order Code

940400

940401

940402

940500

940501

940502

Suspension



Suspension type "I"
(x3) for all curved versions and Linea (>=1967)

L1500

L3000

L6000

(x2) for Linea versions (L1124, L1405,

L1686)

L1500

L3000

L6000

Order Code

9129031

9129032

9129033

9129021

9129022


9129023

SwitchDIM



• For flux control through SwitchDIM.

Ceiling surface/suspension marking kit



• Option supplied under request.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

DETAILS



End cap




Suspended product




Applied diffuser



Body connector



Fast connection




Continuous line
diffuser



Indirect Part

PHOTOMETRY



CONCEPT S 35 D/I
bFLEX

TO SPECIFY:

Modular suspended LED luminaire, direct and indirect, to be mounted individually or in continuous line. Powder coated extruded aluminium body, off 35mm width. End caps painted at same colour as the profile and with bFLEX diffuser, uniform, supple and adjustable to the profile, allowing a single diffuser up to 30m long. Available in 2 versions: Curves (22,5 , 45 , 90 and 180) and Linea (1124, 1405, 1686, 1967, 2248, 2529 and 2810 mm). Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, MacAdam Step<3 and 70.000 lifetime (@L90, B10, Ta 25 C). Optional 3000K, dimmable Dali driver, S11 suspension, body connector, transparent current supply cable, and recessed ceiling rose T5 D90 or surface ceiling rose T24 D95. Available in 16 colours. – as Roxo Lighting CONCEPT S 35 D/I.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.