

Monospace with wall bracket

With highly efficient LED modules,
integral temperature monitoring device,
CRI: > 80, Colour tolerance: max. 3 SDCM
Service life: L80/B20 > 50 000 h
protection class I, IP65 , IK08
windage area AW 0.026 m²
corrosion-resistant die cast aluminium housing AlSi12,
polyester powder coated,
highly efficient metallized PC reflector,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
4 stainless steel screws,
front frame with anti-drop device,
mounting bracket: 2 drilled holes Ø 7 mm,
spacing 40 - 50 mm, 1 centre hole Ø 21 mm,
tilt range 180°, M20 cable gland,
integral driver

Monospace, asymmetrical beam

Part number*	Colour	Weight	Light source	Luminous flux	Main beam angle γ
8 250 046 049	black	4.5 kg	4 x LED module 11.5 W	5618 lm	58°
8 250 066 049	white		(46 W)		
8 250 056 049	silver grey		warm white (3000 K)		

Monospace, asymmetrical beam, High Output

Part number*	Colour	Weight	Light source	Luminous flux	Main beam angle γ
8 251 046 049	black	4.8 kg	4 x LED module 20 W	9041 lm	58°
8 251 066 049	white		(80 W)		
8 251 056 049	silver grey		warm white (3000 K)		

Monospace, asymmetrical wide beam

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 250 046 089	black	4.5 kg	5 x LED module 10.8 W	6643 lm	C 0 – 180	C 90 – 270
8 250 066 089	white		(54 W)		60°	138°
8 250 056 089	silver grey		warm white (3000 K)			

Monospace, asymmetrical wide beam, High Output

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 251 046 089	black	4.8 kg	5 x LED module 16 W	9120 lm	C 0 – 180	C 90 – 270
8 251 066 089	white		(80 W)		60°	138°
8 251 056 089	silver grey		warm white (3000 K)			

Monospace, lateral wide beam

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 250 046 059	black	4.5 kg	4 x LED module 11.5 W	5635 lm	C 0 – 180	C 90 – 270
8 250 066 059	white		(46 W)		33°	148°
8 250 056 059	silver grey		warm white (3000 K)			








Monospace, lateral wide beam, High Output

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 251 046 059	black	4.8 kg	4 x LED module 20 W	9082 lm	C 0 – 180	C 90 – 270
8 251 066 059	white		(80 W)		33°	148°
8 251 056 059	silver grey		warm white (3000 K)			

Monospace, Comfort Optic

Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)	
8 250 046 009	black	4.6 kg	1 x LED Prism module 55 W	3971 lm	C 0 – 180	C 90 – 270
8 250 066 009	white		warm white (3000 K)		71°	139°
8 250 056 009	silver grey					

Part number	Description
. 5 . . .	Luminaire with neutral white colour temperature (4000 K)
. 1 . .	Dimmable luminaire (DALI)

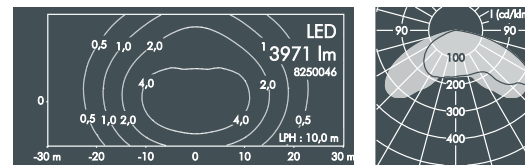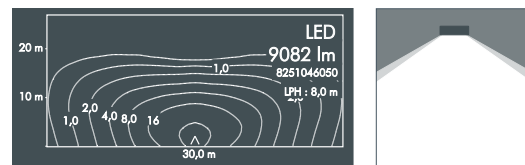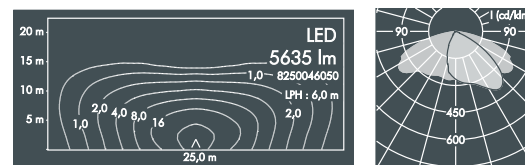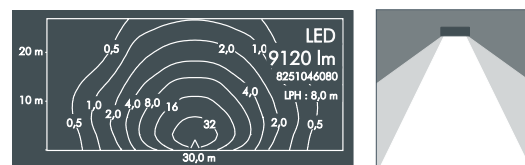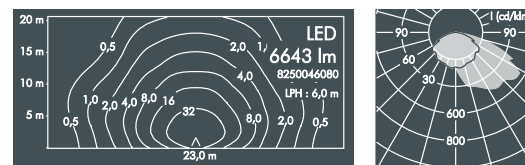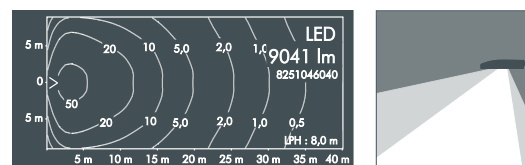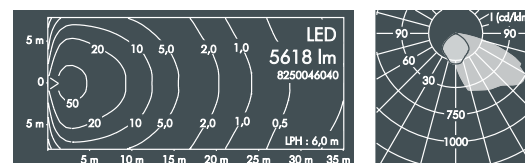

LED (see page 247)

Luminaires available in 2700 K and other colour temperatures upon request

