




Superlight Nano 4 RGBW


With high performance LEDs RGBW, external DMX-controller required, integral temperature monitoring device protection class I, IP67 , IK08 windage area A_W 0.02 m² corrosion-resistant die cast aluminium housing AlSi12, polyester powder coated, all exterior steel parts are stainless steel, tempered safety glass, silicon gasket, powder coated die cast zinc mounting bracket with tilt scale: 2 drilled holes Ø 8.5 mm, spacing 50 - 70 mm, 1 centre hole Ø 12.5 mm, tilt range 120°, 2 x M20 cable gland, RDM compatible integral driver (AC/DC)


Superlight Nano 4 RGBW, narrow beam					
Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 821 049 019	black	2.3 kg	5 x LED RGBW (W = 3000 K) (max. 47 W)	max. 1462 lm	17°
8 821 069 019	white				
8 821 059 019	silver grey				

Superlight Nano 4 RGBW, medium wide beam					
Part number*	Colour	Weight	Light source	Luminous flux	Beam angle γ (FWHM)
8 821 049 049	black	2.3 kg	5 x LED RGBW (W = 3000 K) (max. 47 W)	max. 1544 lm	34°
8 821 069 049	white				
8 821 059 049	silver grey				

Part number*	Description
. 4..	Luminaire with 4 cable glands for through wiring


*The luminaires are available with LEDs in different colour combinations and Tunable White (2700 K - 6500 K) upon request.

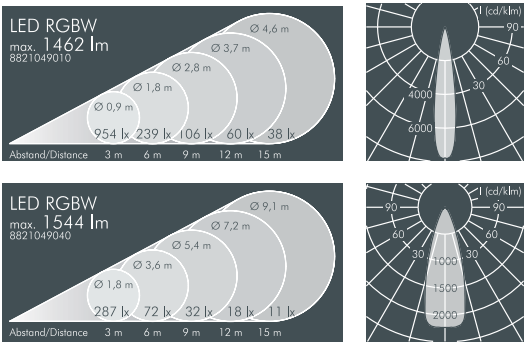




Accessories Superlight Nano 4


Part number	Colour	Description
128 0 700 940	black	Telescopic wall arm 300 - 480 mm, aluminium, polyester powder coated
128 0 700 960	white	
128 0 700 950	silver grey	




Part number	Colour	Description
128 0 730 940	black	Telescopic wall arm 440 - 610 mm, aluminium, polyester powder coated
128 0 730 960	white	
128 0 730 950	silver grey	



Part number	Colour	Description
128 0 760 940	black	Pole clamp, aluminium, polyester powder coated, stainless steel strap, for mounting on poles Ø 60 - 120 mm
128 0 760 960	white	
128 0 760 950	silver grey	




Part number	Colour	Description
129 0 502 940	black	Earth spike, stainless steel, for use in landscaped areas
129 0 502 960	white	
129 0 502 950	silver grey	





Part number	Description
120 0 623 940	Expandable tree strap with mounting plate, made of polyester fiber for trunk circumference 350 - 450 mm*, with polyester powder coated mounting plate

*different lengths available upon request



Part number	Colour	Description
128 0 814 940	black	Cowl, stainless steel, to avoid glare from 3 directions, for retro-fitting
128 0 814 960	white	
128 0 814 950	silver grey	



Part number	Colour	Description
128 0 815 940	black	Barn doors, aluminium, to avoid glare from 4 directions, for retro-fitting
128 0 815 960	white	
128 0 815 950	silver grey	