

Date
Customer
Project
Type

Drupl70 Surface


With a name inspired by the effects of sunlight through droplets of water, this luminaire's high-quality light and anti-glare qualities are key to comfort and productivity in professional settings. Drupl is the perfect solution for office-compliant continuous lighting, around the working space as well as on the ceiling. Drupl combines the benefits of unique optical lenses and highly-performant LEDs with elegant design. Create a uniform light expression in your space with general light down and soft light up.



DRUPL 70 SURFACE






DRUPL 70 STRAIGHT

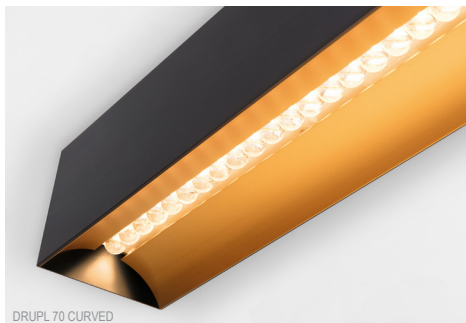

DRUPL 70 CURVED



DRUPL 70 SHARP



Base Profile

Dimensions	67mm x 70mm (h x w)
Base thickness	1.5mm
Mounting	Ceiling
Indoor/Outdoor	Indoor
Finish	Fine structured scratch resistant powder coating: white structure, black structure Brushed anodised: black matt Anodised: aluminium
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

Profile Cover

Finish	Fine structured scratch resistant powder coating: white structure, black structure Brushed anodised: gold, black matt Anodised: aluminium
--------	--

Lenses


Type	PMMA
------	------

Lighting Modules

Linear Lighting

LED type	High power LED line
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, Dali/Pushdim

Finish Information



aluminium
(anodised)




gold
(brushed anodised)



black structure
(powder coating)




black matt
(brushed anodised)




white structure
(powder coating)

Base Profile




- 93540005** DRUPL 70 BASE ALU/M
- 93540032** DRUPL 70 BASE BLACK STRUC/M
- 93540083** DRUPL 70 BASE BLACK MATT/M
- 93540009** DRUPL 70 BASE WHITE STRUC/M


Profile Cover



- 93540205*** DRUPL 70 CURVED COVER ALU/M
- 93540246*** DRUPL 70 CURVED COVER GOLD/M
- 93540232*** DRUPL 70 CURVED COVER BLACK STRUC/M
- 93540283*** DRUPL 70 CURVED COVER BLACK MATT/M
- 93540209*** DRUPL 70 CURVED COVER WHITE STRUC/M




- 93540305*** DRUPL 70 SHARP COVER ALU/M
- 93540346*** DRUPL 70 SHARP COVER GOLD/M
- 93540332*** DRUPL 70 SHARP COVER BLACK STRUC/M
- 93540383*** DRUPL 70 SHARP COVER BLACK MATT/M
- 93540309*** DRUPL 70 SHARP COVER WHITE STRUC/M




- 93540405*** DRUPL 70 STRAIGHT COVER ALU/M
- 93540446*** DRUPL 70 STRAIGHT COVER GOLD/M
- 93540432*** DRUPL 70 STRAIGHT COVER BLACK STRUC/M
- 93540483*** DRUPL 70 STRAIGHT COVER BLACK MATT/M
- 93540409*** DRUPL 70 STRAIGHT COVER WHITE STRUC/M

Endplate



- 93540181** DRUPL 70 ENDPLATE LOW ALU
- 93543181** DRUPL 70 ENDPLATE LOW BLACK STRUC
- 93541183** DRUPL 70 ENDPLATE LOW BLACK MATT
- 93549181** DRUPL 70 ENDPLATE LOW WHITE STRUC



- 93540182** DRUPL 70 ENDPLATE HIGH ALU
- 93543182** DRUPL 70 ENDPLATE HIGH BLACK STRUC
- 93543183** DRUPL 70 ENDPLATE HIGH BLACK MATT
- 93549182** DRUPL 70 ENDPLATE HIGH WHITE STRUC


Fixation / Mounting

- 93540162** DRUPL 70 SURFACE FIXATION HOLE

Supplement

- 93540010** DRUPL 70 RAL SUPPL. BASE/M
- 93540215** DRUPL 70 RAL SUPPL. CURVED COVER/M
- 93540188** DRUPL 70 RAL SUPPL. ENDPLATE
- 93540315** DRUPL 70 RAL SUPPL. SHARP COVER/M
- 93540415** DRUPL 70 RAL SUPPL. STRAIGHT COVER/M
- 93000101** DRUPL 70 RAL SET UP CHARGE

* Should be ordered for both sides



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

Linear LED Fortimo LEDline DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 100°	Lens 120°
2x	9X544502	9X544002	9X544102	560	93540016*	93540017*	93540018*
3x	9X544503	9X544003	9X544103	840			
4x	9X544504	9X544004	9X544104	1120			
5x	9X544505	9X544005	9X544105	1400			
6x**	9X544506	9X544006	9X544106	1680			
7x**	9X544507	9X544007	9X544107	1960			

Linear LED Fortimo LEDline Preset 75% DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 100°	Lens 120°
2x	9X545503	9X545003	9X545103	840	93540016*	93540017*	93540018*
3x	9X545503	9X545003	9X545103	840			
4x	9X545504	9X545004	9X545104	1120			
5x	9X545505	9X545005	9X545105	1400			
6x**	9X545506	9X545006	9X545106	1680			
7x**	9X545507	9X545007	9X545107	1960			

Linear LED Fortimo LEDline Preset 50% DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 100°	Lens 120°
3x	9X546503	9X546003	9X546103	840	93540016*	93540017*	93540018*
4x	9X546504	9X546004	9X546104	1120			
5x	9X546505	9X546005	9X546105	1400			
6x**	9X546506	9X546006	9X546106	1680			
7x**	9X546507	9X546007	9X546107	1960			

Lamp type	MED POWER LED
Delivered lumens	3273lm/m (LENS 80°) 2918lm/m (LENS 100°) 3049lm/m (LENS 120°)
Connected load	9W/ledline
Efficacy	96lm/W (LENS 80°) 86lm/W (LENS 100°) 90lm/W (LENS 120°)
UGR	18 (LENS 80°) 20 (LENS 100°) 24 (LENS 120°)
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

Lamp type	MED POWER LED
Delivered lumens	2580lm/m (LENS 80°) 2300lm/m (LENS 100°) 2404lm/m (LENS 120°)
Connected load	6,6W/ledline
Efficacy	99lm/W (LENS 80°) 88lm/W (LENS 100°) 92lm/W (LENS 120°)
UGR	17 (LENS 80°) 19 (LENS 100°) 23 (LENS 120°)
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

Lamp type	MED POWER LED
Delivered lumens	1518lm/m (LENS 80°) 1354lm/m (LENS 100°) 1414lm/m (LENS 120°)
Connected load	4,3W/ledline
Efficacy	84lm/W (LENS 80°) 75lm/W (LENS 100°) 79lm/W (LENS 120°)
UGR	16 (LENS 80°) 18 (LENS 100°) 21 (LENS 120°)
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

Technical values for straight cover white struc - 3000K

* Lens required: ordered quantity must be accoring to number of ledlines

** Emergency available for 6x en 7x