

Date

Customer

Project




Type

Drupl70 Suspended

With a name inspired by the effects of sunlight through droplets of water, this luminaire's high-quality light and anti-glare qualities are key to comfort and productivity in professional settings. Drupl is the perfect solution for office-compliant continuous lighting, around the working space as well as on the ceiling. Drupl combines the benefits of unique optical lenses and highly-performant LEDs with elegant design. Create a uniform light expression in your space with general light down and soft light up.



Drupl70 Suspended



Base Profile

Dimensions	67mm x 70mm (h x w)
Base thickness	1.5mm
Mounting	Ceiling
Indoor/Outdoor	Indoor
Finish	Fine structured scratch resistant powder coating: white structure, black structure Brushed anodised: black matt Anodised: aluminium
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

Profile Cover

Finish	Fine structured scratch resistant powder coating: white structure, black structure Brushed anodised: gold, black matt Anodised: aluminium
--------	--

Lenses

Type	PMMA
------	------

Lighting Modules

Linear Lighting

LED type	High power LED line
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, Dali/Pushdim


Finish Information



aluminium
(anodised)




gold
(brushed anodised)



black structure
(powder coating)




black matt
(brushed anodised)




white structure
(powder coating)

Base Profile




- 93540032** DRUPL 70 BASE BLACK STRUC/M
- 93540083** DRUPL 70 BASE BLACK MATT/M
- 93540009** DRUPL 70 BASE WHITE STRUC/M


Profile Cover




- 93540205*** DRUPL 70 CURVED COVER ALU/M
- 93540246*** DRUPL 70 CURVED COVER GOLD/M
- 93540232*** DRUPL 70 CURVED COVER BLACK STRUC/M
- 93540283*** DRUPL 70 CURVED COVER BLACK MATT/M
- 93540209*** DRUPL 70 CURVED COVER WHITE STRUC/M



- 93540305*** DRUPL 70 SHARP COVER ALU/M
- 93540346*** DRUPL 70 SHARP COVER GOLD/M
- 93540332*** DRUPL 70 SHARP COVER BLACK STRUC/M
- 93540383*** DRUPL 70 SHARP COVER BLACK MATT/M
- 93540309*** DRUPL 70 SHARP COVER WHITE STRUC/M




- 93540405*** DRUPL 70 STRAIGHT COVER ALU/M
- 93540446*** DRUPL 70 STRAIGHT COVER GOLD/M
- 93540432*** DRUPL 70 STRAIGHT COVER BLACK STRUC/M
- 93540483*** DRUPL 70 STRAIGHT COVER BLACK MATT/M
- 93540409*** DRUPL 70 STRAIGHT COVER WHITE STRUC/M




- 93540105** DRUPL 70 TOP COVER ALU/M
- 93540132** DRUPL 70 TOPCOVER BLACK STRUC/M
- 93540183** DRUPL 70 TOPCOVER BLACK MATT/M
- 93540109** DRUPL 70 TOPCOVER WHITE STRUC/M

Endplate




- 93540181** DRUPL 70 ENDPLATE LOW ALU
- 93543181** DRUPL 70 ENDPLATE LOW BLACK STRUC
- 93541183** DRUPL 70 ENDPLATE LOW BLACK MATT
- 93549181** DRUPL 70 ENDPLATE LOW WHITE STRUC



- 93540182** DRUPL 70 ENDPLATE HIGH ALU
- 93543182** DRUPL 70 ENDPLATE HIGH BLACK STRUC
- 93543183** DRUPL 70 ENDPLATE HIGH BLACK STRUC
- 93549182** DRUPL 70 ENDPLATE HIGH WHITE STRUC


Fixation / Mounting




- 93540505** DRUPL 70 CONNECTION COVER FOR SUSP ALU
- 93540583** DRUPL 70 CONNECTION COVER FOR SUSP BLACK MATT
- 93540532** DRUPL 70 CONNECTION COVER FOR SUSP BLSTR
- 93540509** DRUPL 70 CONNECTION COVER FOR SUSP WHSTR

* Should be ordered for both sides

Drupl70 Suspended




- 93540350** DRUPL 70 SUSPENSION ALU
93540850 DRUPL 70 SUSPENSION BLACK STRUC
93540950 DRUPL 70 SUSPENSION WHITE STRUC




- 93001109** HINGE FOR HIGH CONE ALU
93001132 HINGE FOR HIGH CONE BLACK STRUC
93001109 HINGE FOR HIGH CONE WHITE STRUC


Electrical Supply




- 93002003** POWER FEED KIT 2M 3X1.5MM² ALU
93003203 POWER FEED KIT 2M 3X1.5MM² BLACK STRUC
93002903 POWER FEED KIT 2M 3X1.5MM² WHITE STRUC
93002005 POWER FEED KIT 2M 5X1.5MM² ALU
93003205 POWER FEED KIT 2M 5X1.5MM² BLACK STRUC
93002905 POWER FEED KIT 2M 5X1.5MM² WHITE STRUC
93003303 POWER FEED KIT 2M 6X0.75 ALU
93003305 POWER FEED KIT 2M 6X0.75 BLACK STRUC
93003304 POWER FEED KIT 2M 6X0.75 WHITE STRUC




- 93003906** POWER FEED KIT 2M 9X0.75MM² ALU
93003908 POWER FEED KIT 2M 9X0.75MM² BLACK STRUC
93003907 POWER FEED KIT 2M 9X0.75MM² WHITE STRUC



- 93002151** CONNECTION BOX 3P FOR TRANSPARENT CABLE ALU
93003151 CONNECTION BOX 3P FOR TRANSPARENT CABLE BLACK STRUC
93002951 CONNECTION BOX 3P FOR TRANSPARENT CABLE WHITE STRUC
93002251 CONNECTION BOX 5P FOR TRANSPARENT CABLE ALU
93003251 CONNECTION BOX 5P FOR TRANSPARENT CABLE BLACK STRUC
93003951 CONNECTION BOX 5P FOR TRANSPARENT CABLE WHITE STRUC
93003451 CONNECTION BOX 6P FOR TRANSPARENT CABLE ALU
93003651 CONNECTION BOX 6P FOR TRANSPARENT CABLE BLACK STRUC
93003551 CONNECTION BOX 6P FOR TRANSPARENT CABLE WHITE STRUC



- 93005051** CONNECTION BOX 9P FOR TRANSPARENT CABLE ALU
93005251 CONNECTION BOX 9P FOR TRANSPARENT CABLE BLACK STRUC
93005151 CONNECTION BOX 9P FOR TRANSPARENT CABLE WHITE STRUC




- 93002152** TRANSPARENT CABLE 3X1.5MM²/M
93002252 TRANSPARENT CABLE 5X1.5MM²/M
93003452 TRANSPARENT CABLE 6X0.75MM²/M
93003552 TRANSPARENT CABLE 9X0.75MM²/M

Supplement

- 93540010** DRUPL 70 RAL SUPPL. BASE/M
93540515 DRUPL 70 RAL SUPPL. CONN. COVER FOR SUSPENSION
93540215 DRUPL 70 RAL SUPPL. CURVED COVER/M
93540188 DRUPL 70 RAL SUPPL. ENDPLATE
93540315 DRUPL 70 RAL SUPPL. SHARP COVER/M
93540415 DRUPL 70 RAL SUPPL. STRAIGHT COVER/M
93000101 DRUPL 70 RAL SET UP CHARGE
93000153 DRUPL 70 RAL SUPPL. CONNECT. BOX
93002053 DRUPL 70 RAL SUPPL. FOR POWER FEED KIT 2M
93001100 DRUPL 70 RAL SUPPL. HINGE FOR HIGH CONE
93000358 DRUPL 70 RAL SUPPL. SUSPENSION 4M

Drupl70 Suspended



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

Linear LED Fortimo LEDline DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 100°	Lens 120°
2x	9X544502	9X544002	9X544102	560	93540016*	93540017*	93540018*
3x	9X544503	9X544003	9X544103	840			
4x	9X544504	9X544004	9X544104	1120			
5x	9X544505	9X544005	9X544105	1400			
6x**	9X544506	9X544006	9X544106	1680			
7x**	9X544507	9X544007	9X544107	1960			

Linear LED Fortimo LEDline Preset 75% DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 100°	Lens 120°
2x	9X545503	9X545003	9X545103	840	93540016*	93540017*	93540018*
3x	9X545503	9X545003	9X545103	840			
4x	9X545504	9X545004	9X545104	1120			
5x	9X545505	9X545005	9X545105	1400			
6x**	9X545506	9X545006	9X545106	1680			
7x**	9X545507	9X545007	9X545107	1960			

Linear LED Fortimo LEDline Preset 50% DI

	2700K	3000K	4000K	Module length (mm)	Lens 80°	Lens 100°	Lens 120°
3x	9X546503	9X546003	9X546103	840	93540016*	93540017*	93540018*
4x	9X546504	9X546004	9X546104	1120			
5x	9X546505	9X546005	9X546105	1400			
6x**	9X546506	9X546006	9X546106	1680			
7x**	9X546507	9X546007	9X546107	1960			

Lamp type	MED POWER LED
Delivered lumens*	3273lm/m (LENS 80°) 2918lm/m (LENS 100°) 3049lm/m (LENS 120°)
Connected load*	34W/m
Efficacy*	96lm/W (LENS 80°) 86lm/W (LENS 100°) 90lm/W (LENS 120°)
UGR*	18 (LENS 80°) 20 (LENS 100°) 24 (LENS 120°)
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

Lamp type	MED POWER LED
Delivered lumens	2580lm/m (LENS 80°) 2300lm/m (LENS 100°) 2404lm/m (LENS 120°)
Connected load	6,6W/ledline
Efficacy	99lm/W (LENS 80°) 88lm/W (LENS 100°) 92lm/W (LENS 120°)
UGR	17 (LENS 80°) 19 (LENS 100°) 23 (LENS 120°)
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.


Lamp type	MED POWER LED
Delivered lumens	1518lm/m (LENS 80°) 1354lm/m (LENS 100°) 1414lm/m (LENS 120°)
Connected load	4,3W/ledline
Efficacy	84lm/W (LENS 80°) 75lm/W (LENS 100°) 79lm/W (LENS 120°)
UGR	16 (LENS 80°) 18 (LENS 100°) 21 (LENS 120°)
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

Technical values for straight cover white struc - 3000K

* Lens required: ordered quantity must be accoring to number of ledlines

** Emergency available for 6x en 7x

Drupl70 Suspended

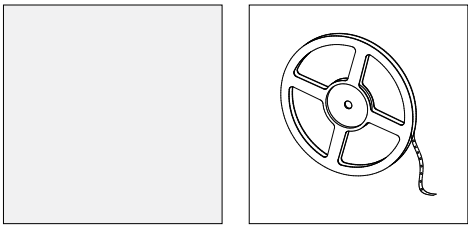

Linear Lighting modules

Linear LED Strip 24V Uplight

1000lm/m

	2700K	3000K	4000K
mounted/m	93000013	93000014	93000015

2000lm/m

	2700K	3000K	4000K
mounted/m	93000029	93000030	93000031

Lamp type	LED STRIP - diffuser included		
	1000lm/m	2000lm/m	
Delivered lumens	2700K	961lm/m	1507lm/m
	3000K	1137lm/m	1695lm/m
	4000K	1094lm/m	1702lm/m
Connected load	2700K	14.4W/m	14.4W/m
	3000K	14.4W/m	14.4W/m
	4000K	14.4W/m	14.4W/m
Efficacy	2700K	67lm/W	105lm/W
	3000K	79lm/W	118lm/W
	4000K	76lm/W	118lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs.		

DRIVERS

93009520	LED DRIVER 24V 60W
93009552	LED DRIVER 24V 100W
96009520	LED DRIVER 24V 60W 1-10V
98009520	LED DRIVER 24V 100W DALI/PUSHDIM

SUPPLEMENTS

93541001	LED STRIP 24V CONNECTION
----------	--------------------------