




Uplight 260 S adjustable optics

With 7 x high performance LEDs,
integral temperature monitoring device,
CRI: > 80, Colour tolerance: max. 2 SDCM
Service life: L90/B10 > 50 000 h
protection class I, IP68 (1.5 m) ♦ ♦ ♦, IK10
corrosion-resistant cast aluminium housing AlSi12,
double powder coated,
precise PMMA optics,
tilt range 0-15°, lockable,
all exterior steel parts are stainless steel,
tempered safety glass flush with frame,
for loads up to max. 4500 kg (according to
DIN EN 60598-2-13), silicon gasket,
V4A stainless steel trim ring and 6 screws,
M20 cable gland with 0.8 m cable H07RN-F3G1,
integral driver

Uplight 260 S, adjustable optics, narrow beam

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 669 016 019	4.8 kg	7 x LED 3.5 W (25 W) warm white (3000 K)	2002 lm	0 – 15°	10°

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 669 015 019	4.8 kg	7 x LED 3.5 W (25 W) neutral white (4000 K)	2102 lm	0 – 15°	10°

Uplight 260 S, adjustable optics, medium wide beam

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 669 016 049	4.8 kg	7 x LED 3.5 W (25 W) warm white (3000 K)	1921 lm	0 – 15°	32°

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 669 015 049	4.8 kg	7 x LED 3.5 W (25 W) neutral white (4000 K)	2017 lm	0 – 15°	32°







Uplight 260 S, adjustable optics, wide beam

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 669 016 059	4.8 kg	7 x LED 3.5 W (25 W) warm white (3000 K)	2086 lm	0 – 15°	62°

Part number	Weight	Light source	Luminous flux	Tilt range	Beam angle γ (FWHM)
8 669 015 059	4.8 kg	7 x LED 3.5 W (25 W) neutral white (4000 K)	2190 lm	0 – 15°	62°

Part number	Description
. 1..	Dimmable luminaire (DALI)
. . . 1.. . . .	Luminaire with slip resistant glass (R13 according to DIN EN 51130) The light distribution becomes more diffuse.
8 670	Luminaire for installation flush with surrounding surface (in combination with installation sleeve 126 0 391 060)






Accessories see page 27

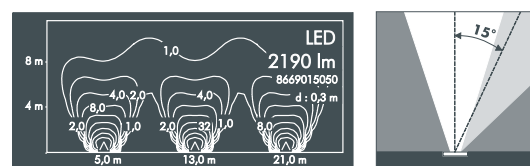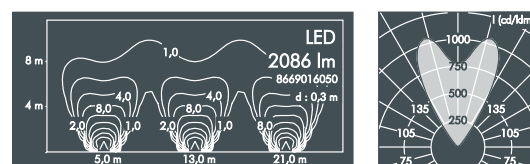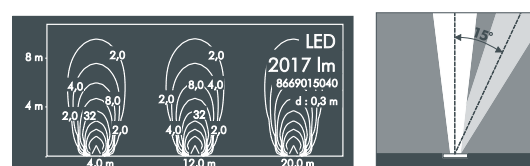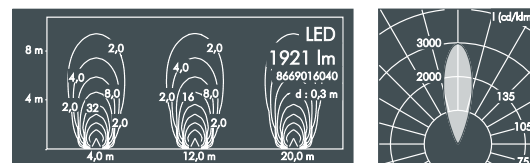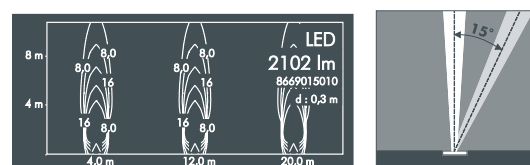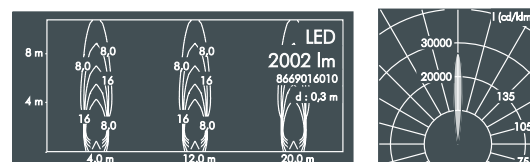

LED

luminaires available in 2700 K and other colour temperatures upon request





Accessories Uplight 260 S

Part number	Description
126 0 391 000	Installation sleeve , polypropylene, for luminaire with overlapping trim (for luminaires 8 669)

Part number	Description
126 0 391 060	Installation sleeve , polypropylene, for luminaire with trim for flush mounting (for luminaires 8 670)

Part number	Description
126 0 470 000	Honeycomb louvre* , internal, factory fitted, to avoid glare

* for retro-fitting, only one accessory per luminaire, not in combination

Uplight 260 S, narrow beam		Half beam angle γ	
Part number	Description	C 0-180	C 90-270
126 0 474 000	Ribbed glass spreader lense* , for linear beam control, continuously adjustable through 360°	10°	57°

* for retro-fitting, only one accessory per luminaire, not in combination