


one mini
origin
installation

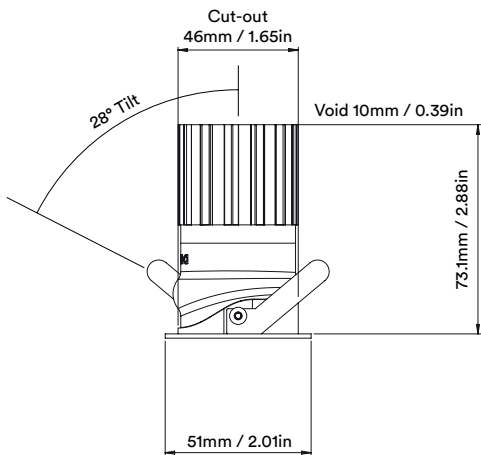

Unit height increases by
12mm / 0.48in for SPOT and
both ELLIPTICAL BEAMS

How to Install

- Cut hole in ceiling as per above cut-out, making sure to chamfer the inside edge at 45° to allow the Cell bezel to tilt, being mindful not damage the plasterboard;
- Wire luminaire cable to Orluna certified driver, ensuring correct polarity (red to positive terminal [+] and black to negative terminal [-]);
- With mains supply switched off, connect driver to mains supply (to avoid damaging the luminaire, do not hot-wire);
- Feed luminaire into cut-out by rotating clockwise pulling the light fitting fully up into the ceiling, ensuring Ø250mm around luminaire and driver is left clear of insulation.

Luminaire Details

Cut-out	Ø46mm
Recess Depth	73.1mm
Clearance	Ø250mm
Fixing Method	Tick Springs
Min Ceiling Thickness	5mm
Max Ceiling Thickness	28mm
Max Driver Distance	20m

Class	III
IP Rating	IP54/IP65
IP Zone	Zone 1
Material	Aluminium ADC12
Cable type	2 Core 0.75mm ²
Cable Length	300mm
Bezel Temp	F Rated