

erluna

arello adjustable
origin

circular product




IP65
IP54



UK
CA

**arello adjustable
origin**

circular product

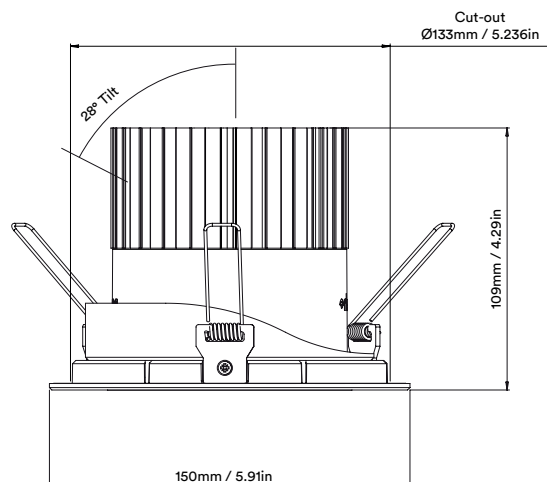

arello adjustable origin

circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.


3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2

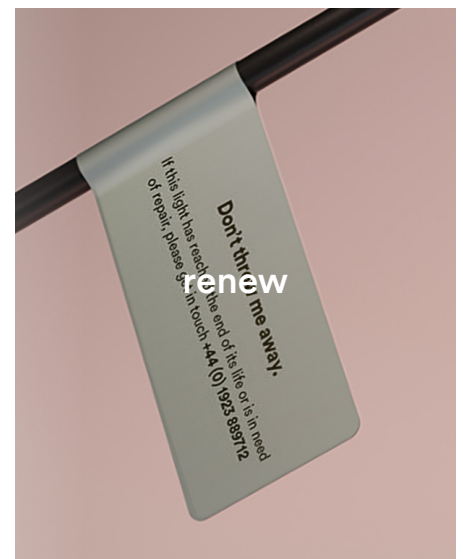

arello adjustable origin

circular product

		2700K		
		SOFT		
		Medium	Wide	Flood
LIGHT VALUES	Beam Width FWHM	24°	39°	63°
	Initial Lumens	2344	2344	2344
	Engine Lumens	1993	2063	2038
	Luminaire Lumens	1968	1924	1908
	Engine Lm/W	80	83	82
	Luminiare Cd	5525	3180	1897
	POWER	Voltage	33.1V	
Drive Current		700mA		
Circuit Power (typ)		24.8W		

		3000K		
		SOFT		
		Medium	Wide	Flood
LIGHT VALUES	Beam Width FWHM	23°	36°	61°
	Initial Lumens	2508	2508	2508
	Engine Lumens	2130	2205	2178
	Luminaire Lumens	2025	2090	2039
	Engine Lm/W	86	89	88
	Luminiare Cd	5855	3763	2174
	POWER	Voltage	33.1V	
Drive Current		700mA		
Circuit Power (typ)		24.8W		

DRIVER	Binning SDCM (Hot)	2
	CRI (typ)(R9)	98 (99)
	TM30 Rf Rg	Rf 95.9 Rg 100.5
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Lifetime (L70)	L70 >50,000hrs
	Protocols	Mains Dim / DALI / 0-10V / Non-dim
	Dim to Dark	0.1% Lux
DRIVER	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
OR	- ALO -	27	M	M	- W -	BB	- F 54 E
		27 / 2700K 30 / 3000K 40 / 4000K	M / Mains Dim D / DALI 0 / 0-10v N / Non Dim X / No Driver	M / Medium W / Wide F / Flood	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 C / Other RAL	BB / Black 9005 WB / White 9010 DB / White 9003 EB / White 9016 CB / Other RAL	F / 60 min Fire Rated Hood 54 / IP54 E / 3hr Emergency N / Frosted Lens Z / LSZH Cable K / Click Connector

*NOTE: clear glass lens as standard. Soft beams can be achieved with adding frosted lens