
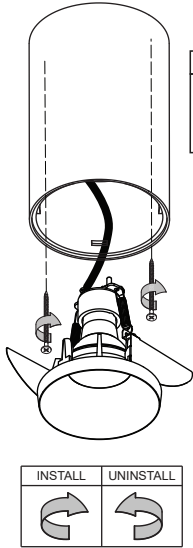




Smart surface tubed 82 large LED GE

128450XX




Combined with smart 82 LED retrofit **GU10**
(LED-fixture on visualisation not included)

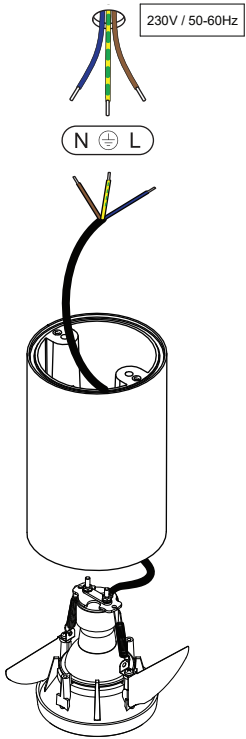

IP-rating
even combined
with included O-ring
fixture remains IP20



Combined with smart 82 LED **GE**
(LED-fixture on visualisation not included)

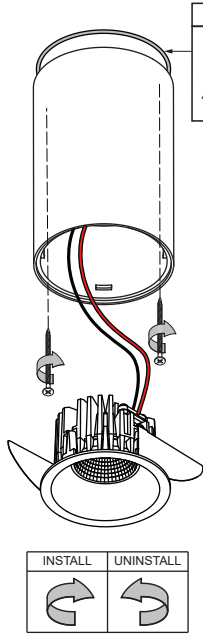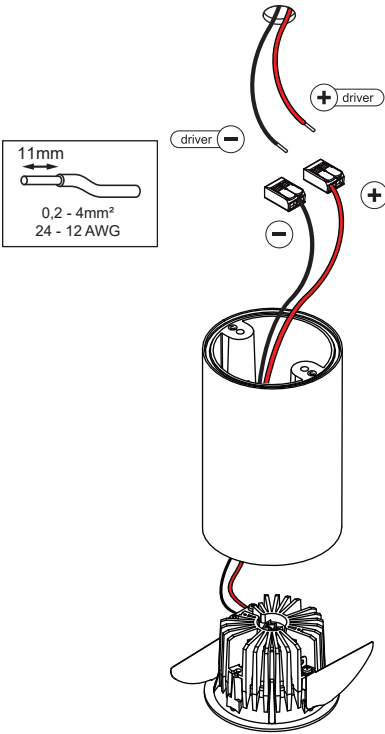

IP-rating
IP54 only when used
with included O-ring
and combined with
'Smart 82 IP55' fixture

CAN BE USED WITH		ATTENTION	
Set at these MAX drive currents:			
Smart 82 (IP*) LED GE	500 mA		
Smart 82 adjustable LED GE	500 mA		
Smart 82 (IP*) warmdim LED GE	350 mA		
Smart 82 adjustable warmdim LED GE	350 mA		
Smart 82 GU10 for tube			

For serial connection, respect polarity!	
⊕ RED	⊖ BLACK

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check
www.supermodular.com or connect with your sales contact.

