

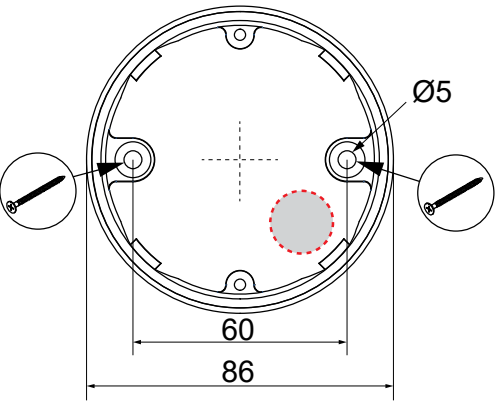




Smart surface tubed 82 small LED GE

128410XX



VISUALIZATION WITH 'SMART LOTIS'
READ 'CAN BE USED WITH' FOR ALL
OTHER USEFUL 'SMART' PRODUCTS
'SMART 82 GE' FIXTURE NOT INCLUDED



IP54 only when used
with included silicone ring
and in closed ceiling

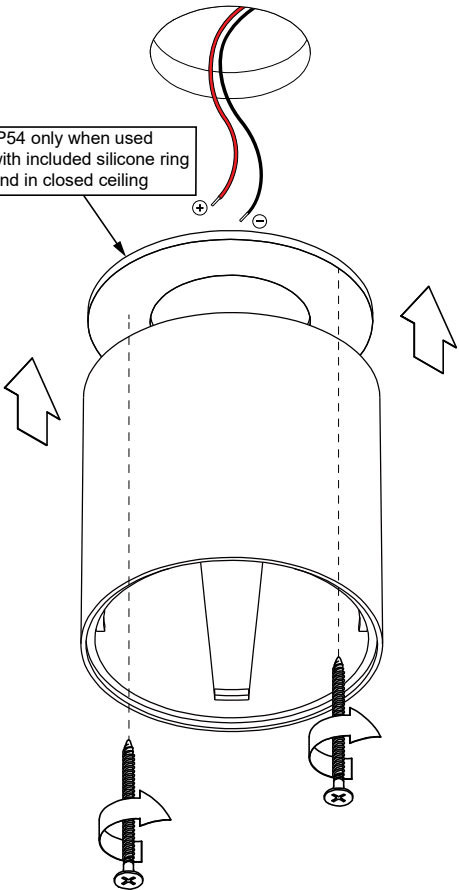

(SCREWS NOT INCLUDED)

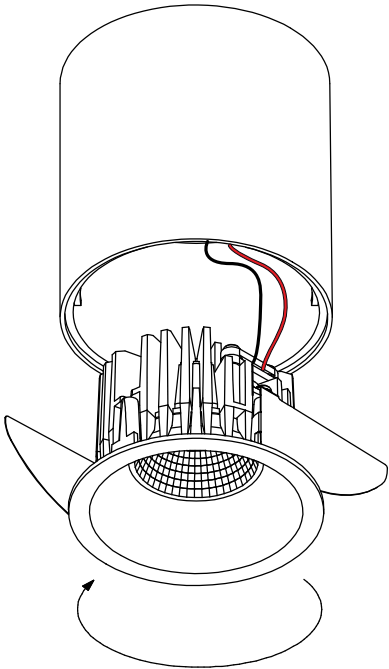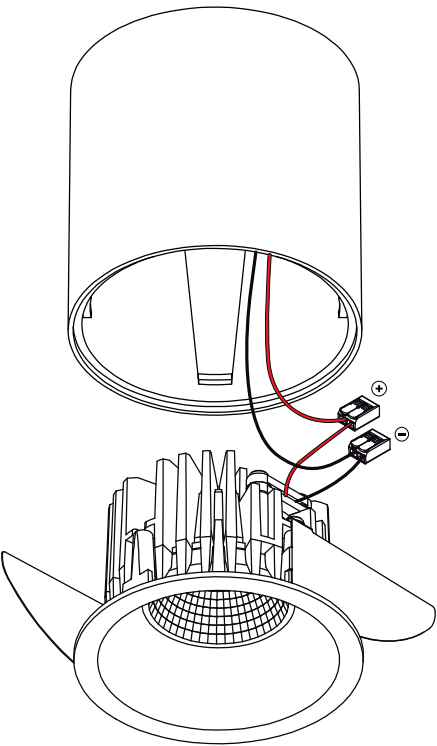

install : Twist clockwise
uninstall : Twist counterclockwise

Smart 82 (IP) LED GE:
Smart 82 adjustable LED GE:

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	16,5	19,2	6,2
500	17,1	19,8	9,2
For serial connection, respect polarity!			
⊕ RED		⊖ BLACK	

CAN BE USED WITH:
Smart 82 (IP*) LED GE
Smart 82 adjustable LED GE
Smart 82 (IP*) warmdim LED GE
Smart 82 adjustable warmdim LED GE

Smart 82 (IP) warmdim LED GE:
Smart 82 adjustable warmdim LED GE:

WARM DIM			
Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,5	18,5	6
For serial connection, respect polarity!			
⊕ RED		⊖ BLACK	

