





Smart surface tubed 82 XL LED GE

128433XX


Combined with smart 82 LED retrofit **GU10**
(LED-fixture on visualization not included)

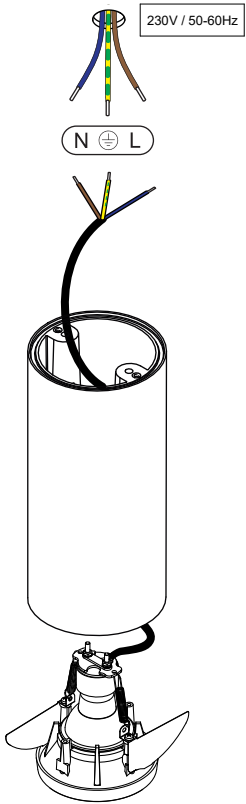



SCREWS
NOT INCLUDED

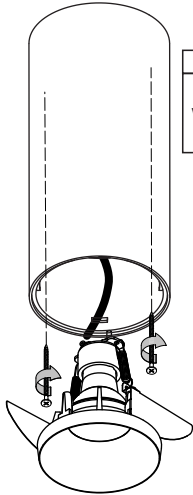



IP-rating
even combined
with included O-ring
fixture remains IP20



Combined with smart 82 LED **GE**
(LED-fixture on visualization not included)

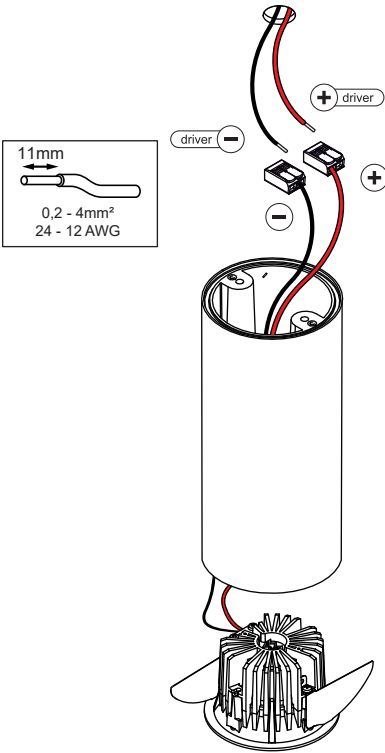

SCREWS
NOT INCLUDED

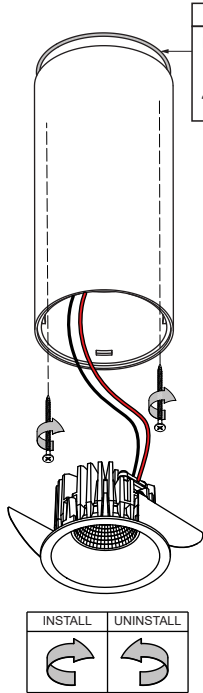

IP-rating
IP54 only when used
with included O-ring
and combined with
'Smart 82 IP55' fixture

CAN BE USED WITH		ATTENTION	
		Set at these MAX drive currents:	
Smart 82 (IP*) LED GE		500 mA	
Smart 82 adjustable LED GE		500 mA	
Smart 82 (IP*) warmdim LED GE		350 mA	
Smart 82 adjustable warmdim LED GE		350 mA	
Smart 82 GU10 for tube			

For serial connection, respect polarity!	
⊕ RED	⊖ BLACK

DRIVERS & ACCESSORIES
For latest version of driver matrix and available accessories check
www.supermodular.com or connect with your sales contact.

