
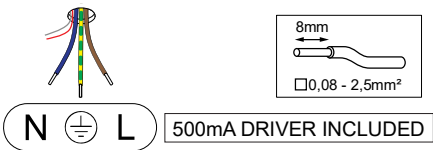


Smart surface tubed 82 XL LED GI




128430XX_128431XX_128432XX

VISUALIZATION WITH 'SMART LOTIS'
READ 'CAN BE USED WITH' FOR ALL
OTHER USEFUL 'SMART' PRODUCTS
'SMART 82 GE' FIXTURE NOT INCLUDED



Disconnect fixture connectors
and pull wires through opening

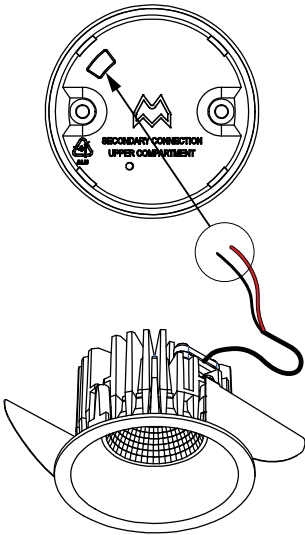





connect dim-wiring for:

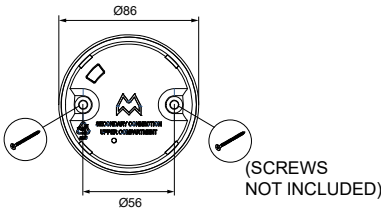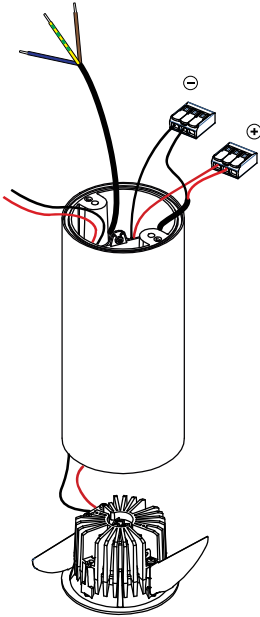

IP54 only when used with included O-ring
and combined with 'Smart 82 IP54' fixture

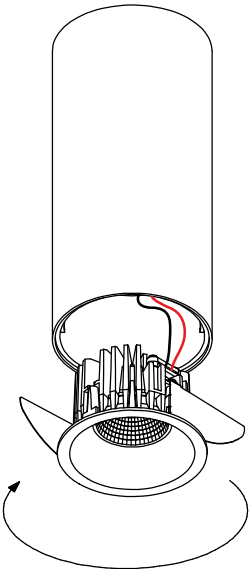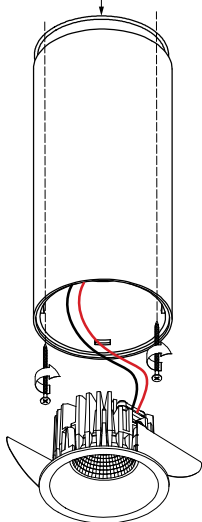

install : Twist clockwise
uninstall : Twist counterclockwise



CAN BE USED WITH:
Smart 82 (IP*) LED GE
Smart 82 adjustable LED GE

CAN NOT BE USED WITH:
Smart 82 (IP) warmdim LED GE
Smart 82 adjustable warmdim LED GE

