



114650XX 114651XX

1

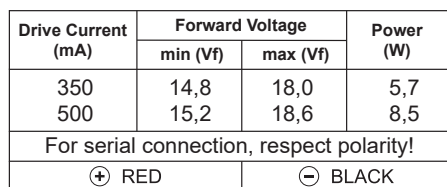

Technical drawing of the T10 LED light module showing dimensions and mounting details. The module is shown in a cross-section view, mounted on a base. The overall width is indicated as $\varnothing 44 \text{ mm}$. The height of the module is indicated as 50 mm. The drawing shows two LED chips on the module, with a red wire and a black wire connected to them. A large double-headed arrow indicates the mounting direction. Below the module, a detail view shows the T10 base and the LED chip.

2



Technical drawing of the LED module showing side and top views with dimensions:

- Side View (Left):**
 - Overall width: 200 x 200 mm
 - Height of the mounting plate: 70 mm
 - Component: Modular LED-driver
 - Minimum clearance: Min 1mm
- Top View (Right):**
 - Mounting plate diameter: $\varnothing 52$ mm
 - Plate thickness: 30 mm
 - LED chip diameter: $\varnothing 45$ mm

3



Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

