

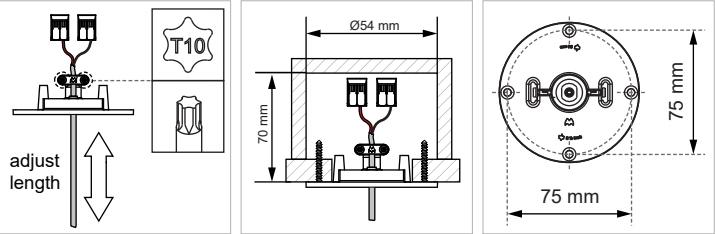


Smart Tube Suspension 115 GE


131414XX

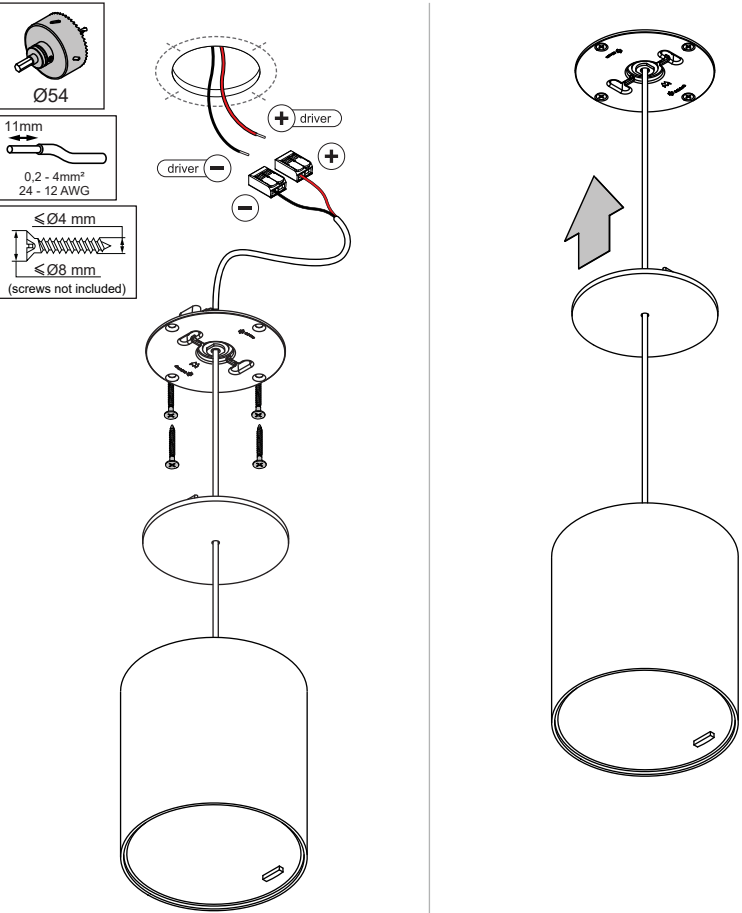



Open 'SMART TUBED' cover

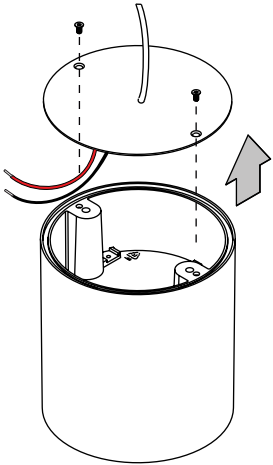

Disconnect fixture connectors and pull wires through opening

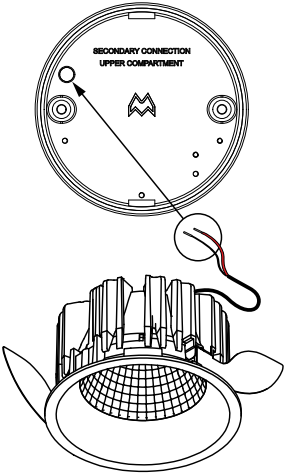

Connect fixture and close tube cover (re-use included toothed washers & screws)

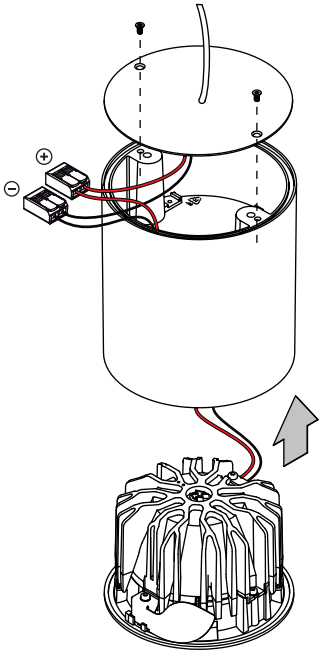

CAN BE USED WITH

Smart 115 LED GE
Smart 115 adjustable LED GE
Smart 115 adjustable warmdim LED GE

ATTENTION

Set at these MAX drive currents:
500 mA
500 mA
350 mA



LED-fixture on visualization not included

For serial connection, respect polarity!

⊕ RED ⊖ BLACK

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

