



Smart Tube Suspension 82 L GE


128428XX

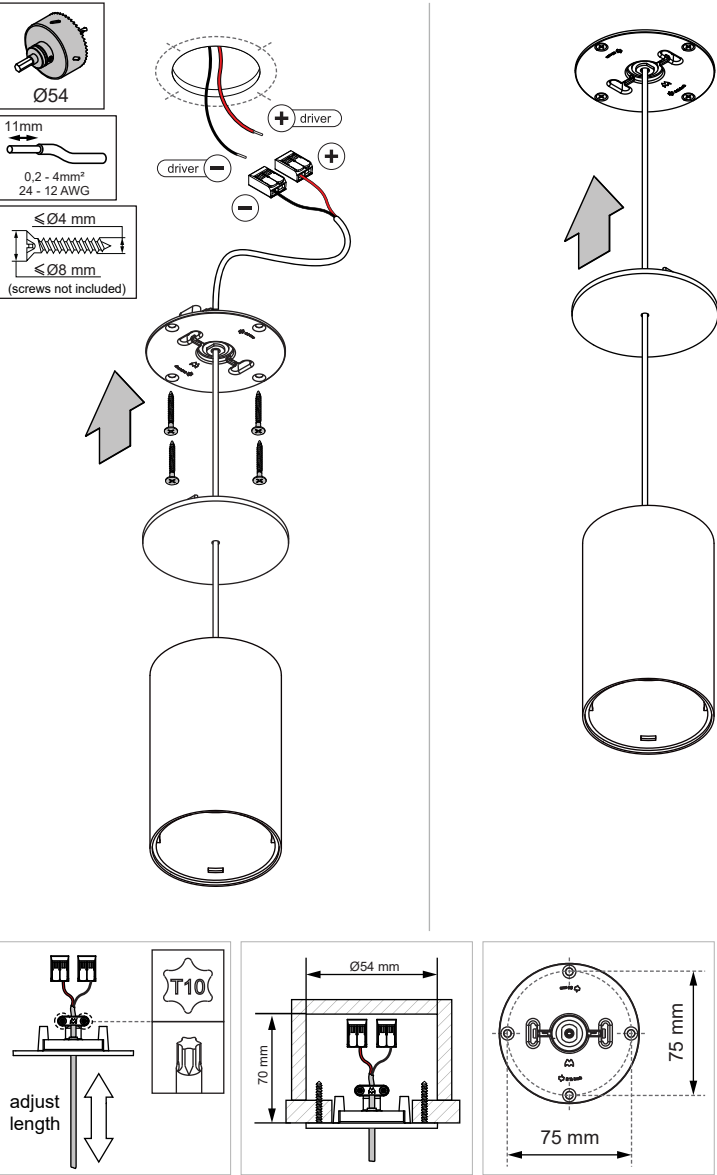



Open 'SMART TUBED' cover

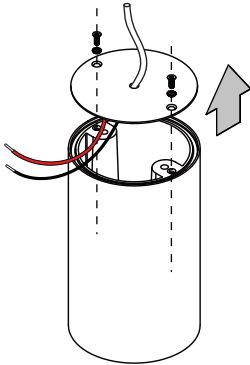

Disconnect fixture connectors and pull wires through opening

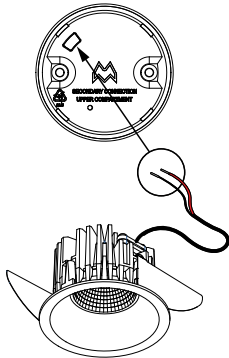

Connect fixture and close tube cover (re-use included toothed washers & screws)

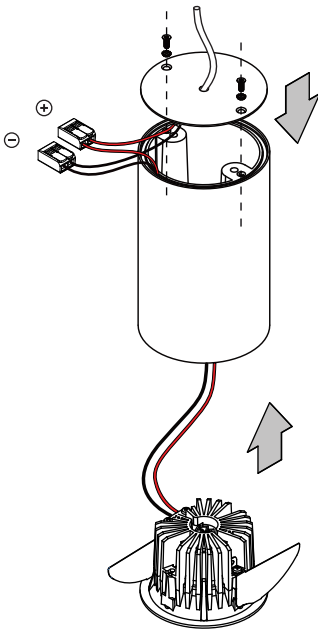

CAN BE USED WITH

Smart 82 LED GE

Smart 82 adjustable LED GE

Smart 82 warmdim LED GE

Smart 82 adjustable warmdim LED GE

ATTENTION

Set at these MAX drive currents:

500 mA

500 mA

350 mA

350 mA



LED-fixture on visualization not included

For serial connection, respect polarity!

⊕ RED ⊖ BLACK

DRIVERS & ACCESSORIES

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.

