



Smart surface tubed suspension 82 XL LED GI

128422XX_128423XX_128424XX


VISUALIZATION WITH 'SMART CAKE'
READ 'CAN BE USED WITH' FOR ALL
OTHER USEFUL 'SMART' PRODUCTS
'SMART 82 GE' FIXTURE NOT INCLUDED

500mA DRIVER INCLUDED

Open 'SMART TUBED' cover

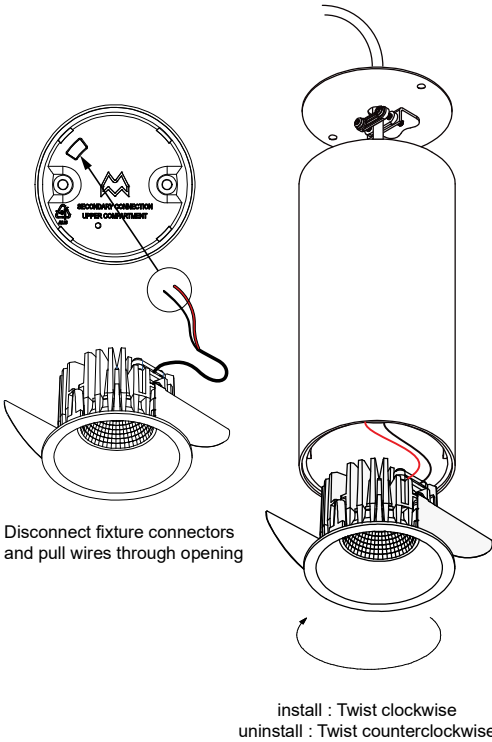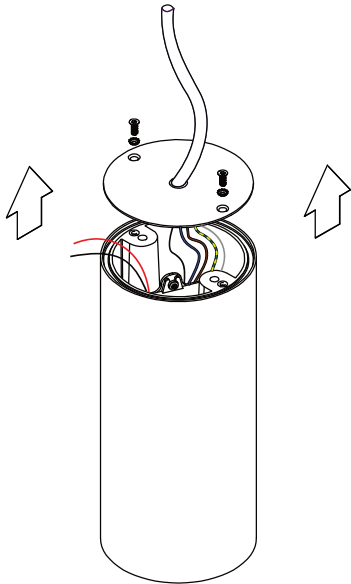






Connect fixture (+ dim wires) and
close tube cover (re-use included
toothed washers & screws)

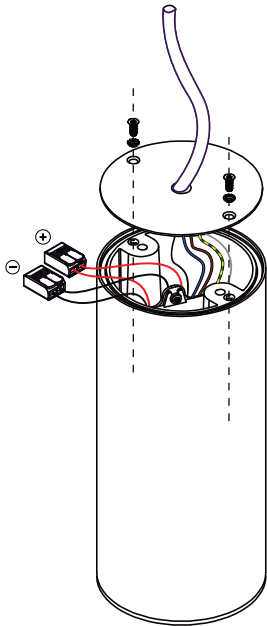

Only for '128423XX':
CONNECT 1-10V/PD
wires :

1-10V
red = + = grey
black = - = black

PUSH
grey = Ls = grey

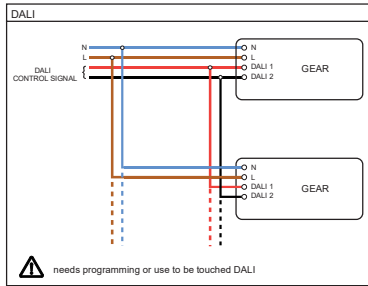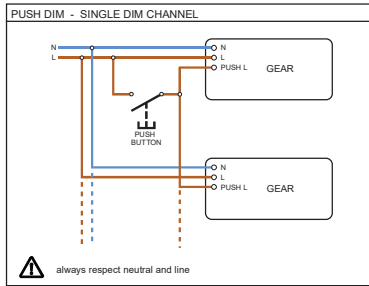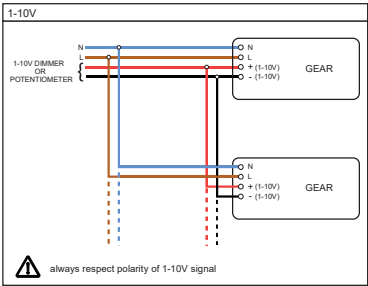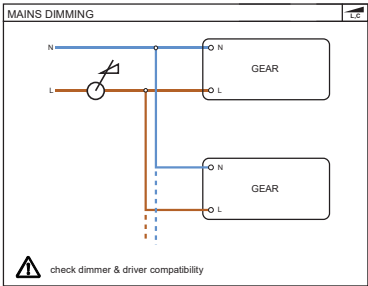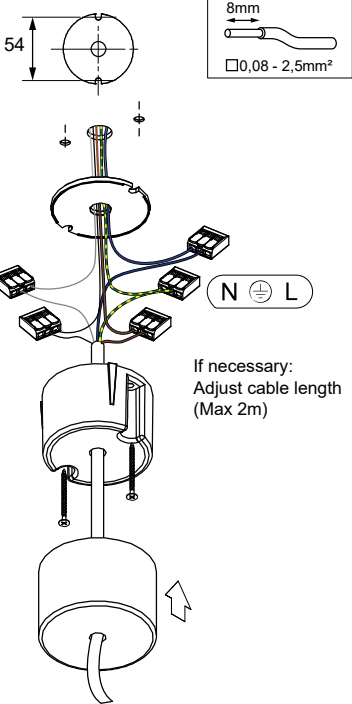

CAN BE USED WITH:
Smart 82 (IP*) LED GE
Smart 82 adjustable LED GE

CAN NOT BE USED WITH:
Smart 82 (IP) warmdim LED GE
Smart 82 adjustable warmdim LED GE

*in combination with Smart Surface Tubed suspension = IP20

