

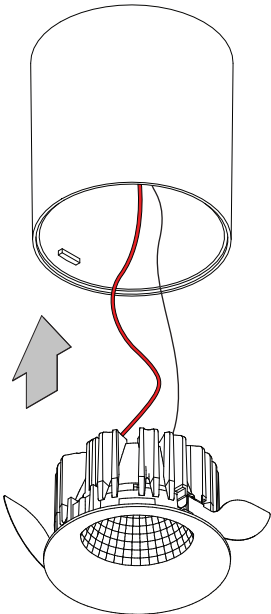
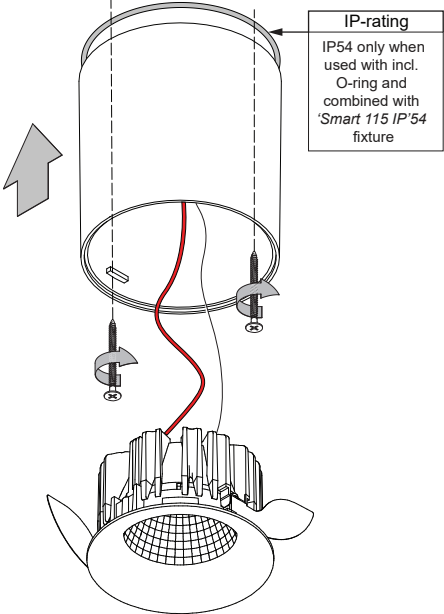
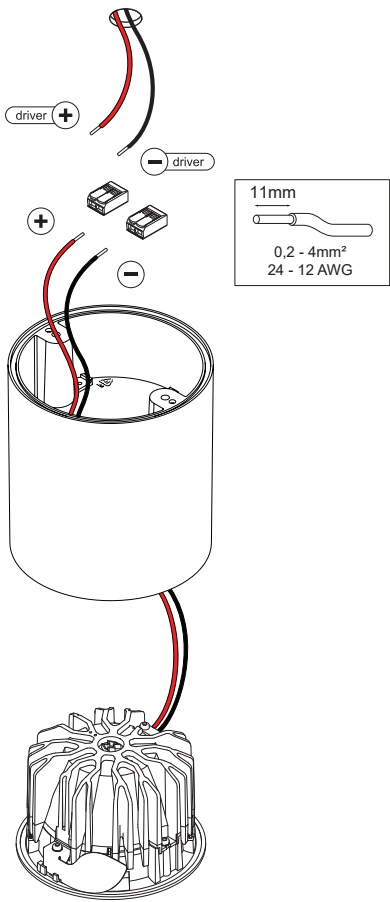
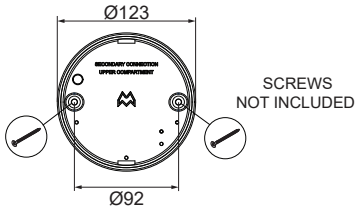


Smart surface tubed 115 LED GE

131404XX

Disconnect fixture connectors
and pull wires through opening

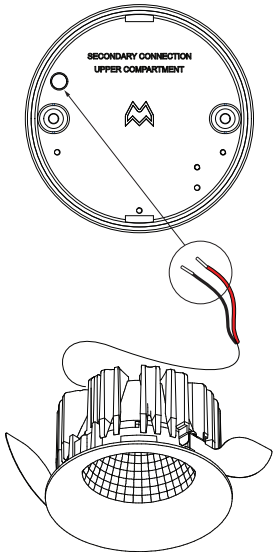

CAN BE USED WITH		ATTENTION Set at these MAX drive currents: !
Smart 115 LED GE	500 mA	
Smart 115 adjustable LED GE	500 mA	
Smart 115 adjustable warmdim LED GE	350 mA	

LED-fixture on visualization not included	
For serial connection, respect polarity!	
⊕ RED	⊖ BLACK
DRIVERS & ACCESSORIES For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.	

