
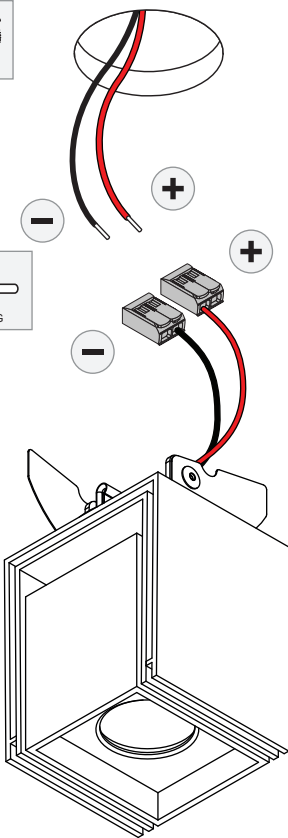


136100XX 136101XX 136102XX 136103XX

136100XX 136101XX 136102XX 136103XX







2

Ø40



Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	16,9	19,7	6,0
⊕ RED		⊖ BLACK	
For serial connection, respect polarity! Not suited for connection to mains voltage. Combine with a Modular LED-driver.			

For serial connection, respect polarity!
Not suited for connection to mains voltage.
Combine with a Modular LED-driver.

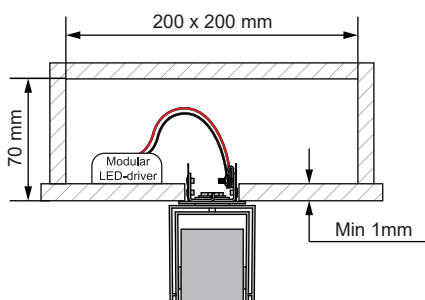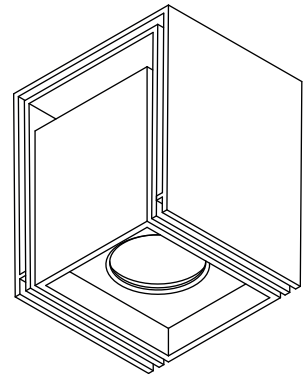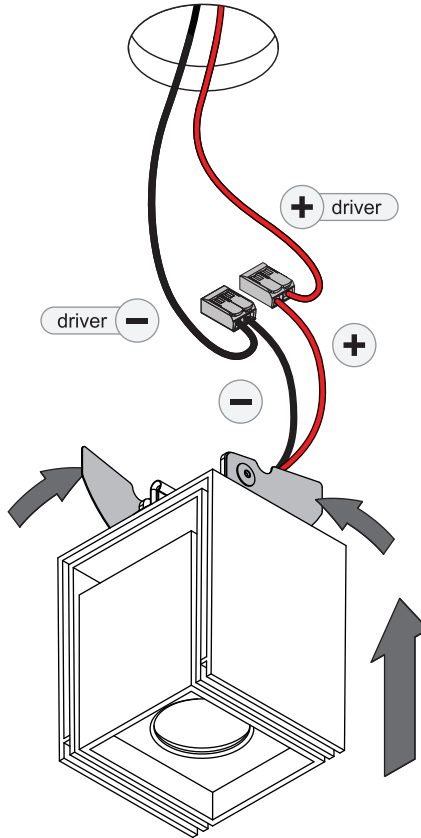

Replace protective shield when broken. The luminaire shall only be used complete with its protective shield.
Reference number: 1015282



Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.

For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.



IP 20

