



Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Surface/Suspended.

Light Distribution: Direct.

Light Source: LED 4000K, RG1, CRI>80, MacAdam Step <3, 80.000h lifetime (@L90, B10, Ta25 °C).

Optical System: Diffuser: Microprismatic or Opal

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium and steel sheet.

Surface Finish: Powder coated.

gCONTROL+ - Microprismatic PMMA diffuser



LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	kg	HF	DALI
	≤19	17	1875	110	Ø300x85	-	-	90620.L300.E	90620.L300.H
	≤19	25	3040	122	Ø400x85	-	-	90620.L400.E	90620.L400.H
	≤19	44	5959	135	Ø600x85	•	-	90620.L600.E	90620.L600.H
	≤19	66	9462	143	Ø900x85	•	-	90620.L900.E	90620.L900.H
	≤19	106	15008	142	Ø1150x85	•	-	90620.L115.E	90620.L115.H

LIGHT+ - Opal PMMA diffuser



LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	kg	HF	DALI
	≤25	17	2000	118	Ø300x85	-	-	90619.L300.E	90619.L300.H
	≤25	25	3200	128	Ø400x85	-	-	90619.L400.E	90619.L400.H
	≤25	44	6341	144	Ø600x85	•	-	90619.L600.E	90619.L600.H
	≤25	66	9918	150	Ø900x85	•	-	90619.L900.E	90619.L900.H
	≤25	106	16321	154	Ø1150x85	•	-	90619.L115.E	90619.L115.H

COLOUR / FINISH


Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

Code	Description
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon


DIMENSIONS

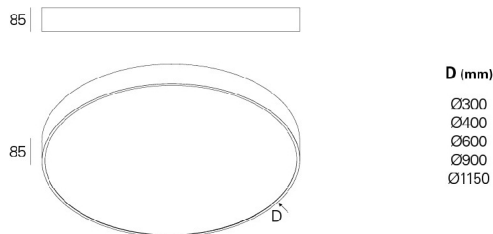

D (mm)

Ø300
Ø400
Ø600
Ø900
Ø1150

Recessed ceiling rose
T5




Surface mounted ceiling rose
T24




Central ceiling rose
T20



Central rod suspension
T0 D95




Central rod suspension
T0 D120



OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

Ceiling rose



Ceiling rose
Circular surface
Circular recessed

Order Code

9786
9713

• To order this option, please choose colour required to the ceiling rose

Central ceiling rose




Ceiling rose

• To order this option, please choose colour required to the ceiling rose.

Order code
977211

Suspension rod



Suspension rod
Ø95 mm (Ø400-600 mm)
Ø120 mm (Ø900-1150 mm)

Order code

913000
913010

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Current supply cable



1,5 m transparent current cable 0,75 mm2
3 x 0,75 mm2
5 x 0,75 mm2
1,5 m transparent current cable 1,5 mm2
7 x 1,5 mm2
9 x 1,5 mm2

Order code

940400
940500
940100
941200

Suspension



Suspension Type "I" 1,5m (x3)
Suspension Type "I" 3m (x3)

Order Code

911100
9111003MT

Emergency unit



Emergency unit 3 hours
• Prepared for Remote-control

Order Code
K3

Low output version



This option can be supplied on request

DETAILS



gCONTROL+
diffuser



LIGHT+ diffuser



Wall mounted
application



Ceiling surface
application



Suspended
application for
central ceiling rose



Central ceiling rose




Suspended
application with
external
perpendicular
suspensions



Recessed ceiling
rose with
perpendicular
suspensions



Central ceiling rose
with internal
perpendicular
suspensions



Suspended
application with
internal
perpendicular
suspensions




Central ceiling rose
with internal
perpendicular
suspensions




Suspension rod

PHOTOMETRY



ROFY 85
HO LIGHT+



ROFY 85
HO gCONTROL+

TO SPECIFY:

Surface (wall and ceiling) or suspended circular LED luminaire. Powder coated extruded aluminium body, available in 16 different colours. Available in 5 diameters, 300, 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver, 3h emergency unit, S10 suspension and transparent current supply cable. Possible to choose between recessed ceiling rose T5 D90 or surface mounted ceiling rose T24 D95 and central surface mounted ceiling rose T21. – as Roxo Lighting ROFY 85.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.