
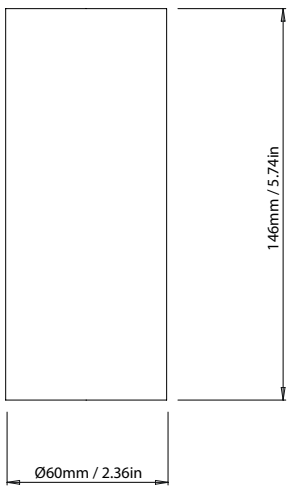
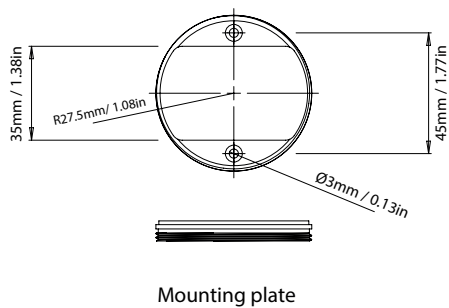


cloud fixed
origin natural
ultra output

circular product

cloud fixed
origin natural ultra output

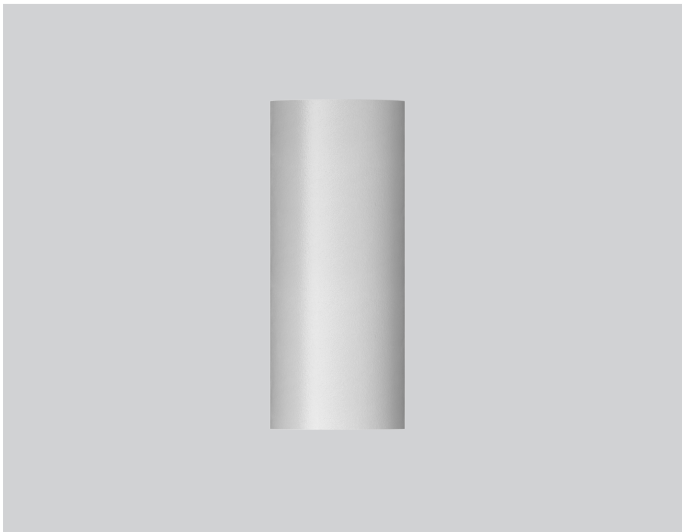

circular product

erluna

cloud fixed origin natural ultra output

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

orluna

cloud fixed
origin natural ultra output

circular product

2700K								
SPOT				SOFT				
LIGHT VALUES	Beam Width FWHM	Ultra 8°	Spot 10°	Narrow 14°	Medium 20°	Wide 27°	Flood 34°	Wash 54°
	Initial Lumens							
	Engine Lumens							
	Luminaire Lumens	215	368	401	1679	1626	1581	1513
	Engine Lm/W							
POWER	Luminaire Cd							
	Voltage	36V	36V	34V	35V			
	Drive Current	200mA	350mA	350mA	600mA			
	Circuit Power (typ)	8.6W	14.2W	13.5W	23.6W			

3000K								
SPOT				SOFT				
LIGHT VALUES	Beam Width FWHM	Ultra 8°	Spot 10°	Narrow 14°	Medium 20°	Wide 27°	Flood 34°	Wash 54°
	Initial Lumens							
	Engine Lumens							
	Luminaire Lumens	215	368	401	1679	1626	1581	1513
	Engine Lm/W							
POWER	Luminaire Cd							
	Voltage	36V	36V	34V	35V			
	Drive Current	200mA	350mA	350mA	600mA			
	Circuit Power (typ)	8.6W	14.2W	13.5W	23.6W			

DRIVER	Binning SDCM (Hot)	2						
	CRI (typ)(R9)	98 (99)						
	TM30 Rf Rg	Rf 97.7 Rg 100.4						
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)						
DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim						
	Dim to Dark	0.1% Lux						
	Distance from LED	20m / 65' (series wiring)						
	Emergency	Emergency packs available						

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NU	CF	27	M	M	W	BB	54 K
		27 / 2700K 30 / 3000K *40 / 4000K	M / Mains Dim D / DALI 0 / 0-10v N / Non Dim X / No Driver	U / Ultra S / Spot N / Narrow M / Medium W / Wide F / Flood H / Wash	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL A / Black Anodised J / Antique Bronze G / Polished Brass K / Brushed Chrome L / Polished Chrome F / Satin Grey P / Brushed Brass Z / Other Metallic	BB / Black 9005 WB / White 9010 DB / White 9003 CB / Other RAL AB / Black Anodised JB / Antique Bronze MB / Polished Brass KB / Brushed Chrome LB / Polished Chrome FB / Satin Grey PB / Brushed Brass ZB / Other Metallic	54 / IP54 C / Constant Torsion Spring H / Honeycomb N / Frosted Lens F- / 60 minute fire rating (hood) K / Click Connector Y5 / 5m cable Y / 10m cable

* Increase 3000k by 7%