
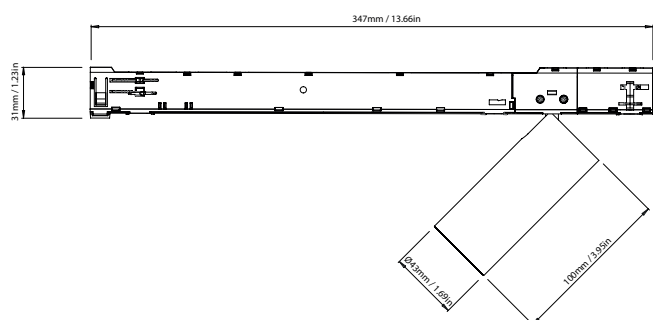


cloud mini
for track 230v
origin natural


circular product

cloud mini for track 230v

origin natural

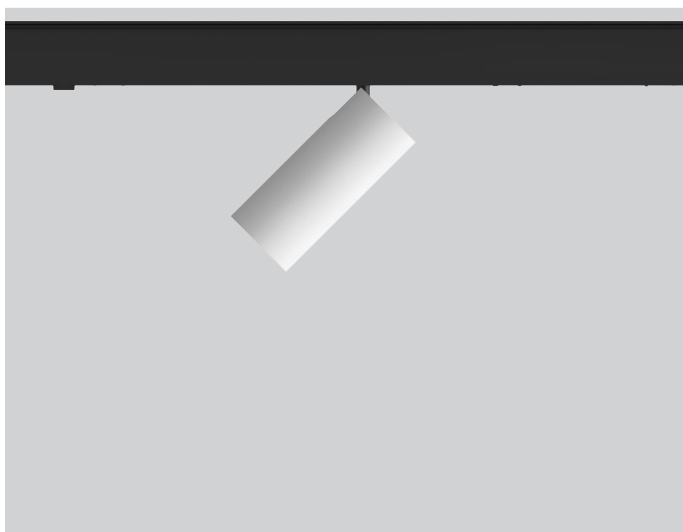

DALI

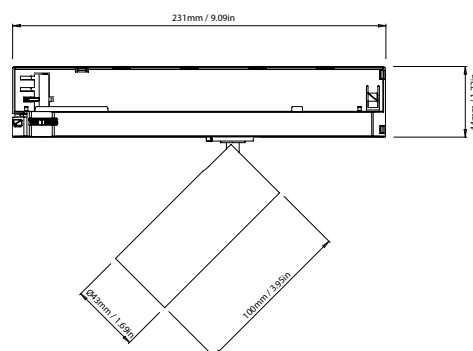

Mains Dim / Non Dim

cloud mini for track 230v


origin natural

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

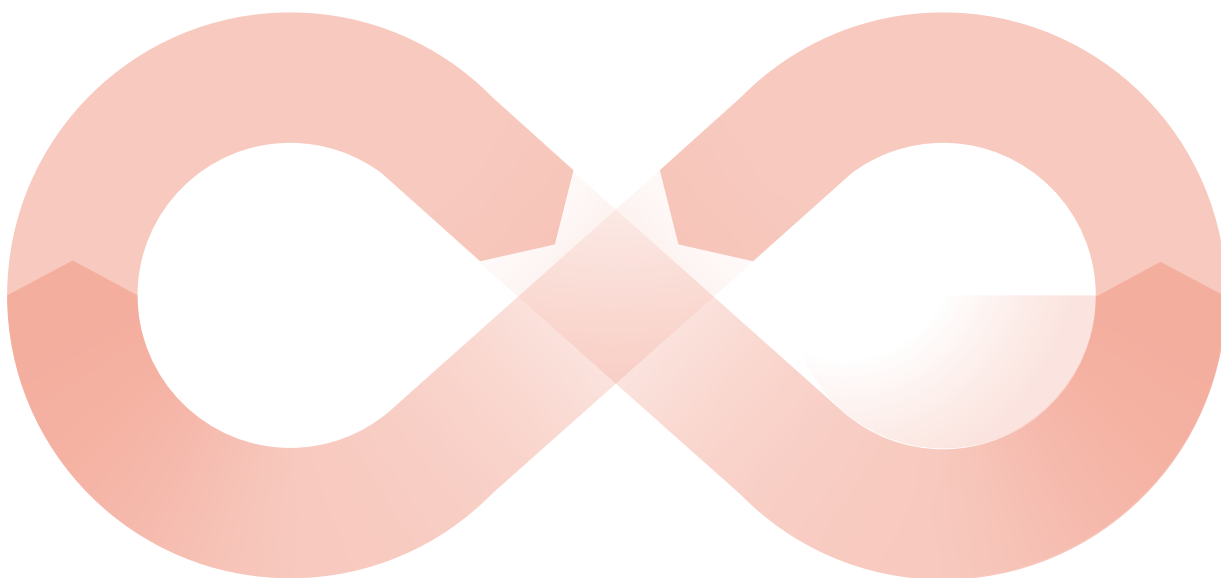

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

erluna

cloud mini for track 230v

origin natural

circular product

2700K								
SPOT		SOFT				SPECIALITY		
LIGHT VALUES	Spot	Narrow	Medium	Wide	Flood	Crisp	Linear	
	Beam Width FWHM	14°	22°	28°	40°	49°	35°	10x45°
	Initial Lumens	685	967	967	967	967	967	685
	Engine Lumens	312	658	746	764	735	751	258
	Luminaire Lumens	210	521	627	622	589	642	171
	Engine Lm/W	46	63	71	73	70	72	38
	Luminaire Cd	2914	1623	2122	1301	878	1814	420
POWER	Voltage	34V	35V				34V	
	Drive Current	200mA	300mA				200mA	
	Circuit Power (typ)	8W	11.8W				8W	

3000K								
SPOT		SOFT				SPECIALITY		
LIGHT VALUES	Spot	Narrow	Medium	Wide	Flood	Crisp	Linear	
	Beam Width FWHM	14°	22°	28°	40°	49°	35°	10x45°
	Initial Lumens	716	1010	1010	1010	1010	1010	716
	Engine Lumens	330	707	778	804	791	807	273
	Luminaire Lumens	222	546	660	656	618	664	185
	Engine Lm/W	49	67	74	77	75	77	40
	Luminaire Cd	3065	1669	2258	1391	955	1939	444
POWER	Voltage	34V	35V				34V	
	Drive Current	200mA	300mA				200mA	
	Circuit Power (typ)	8W	11.8W				8W	

DRIVER	Binning	SDCM (Hot)	2
	CRI (typ)(R9)		98 (99)
	TM30 Rf Rg		Rf 97.7 Rg 100.4
	Lifetime (TM21)		L90 B5 50,000hrs (inc driver)
	Lifetime (Calculated)		L70 426,000hrs
DRIVER	Protocols	Mains Dim / DALI / Non-dim	
	Dim to Dark	0.1% Lux	

SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
NL	CMTW	27	D	M	W	BB	20 H
	CMTW / White CMTB / Black CMTX / Other	27 / 2700K 30 / 3000K *40 / 4000K	D / DALI M / Mains Dim N / Non Dim	S / Spot N / Narrow M / Medium W / Wide F / Flood C / Crisp L / Elliptical Linear	W / White RAL 9010 D / White RAL 9003 B / Black RAL 9005 C / Other RAL A / Black Anodised J / Antique Bronze G / Polished Brass K / Brushed Chrome L / Polished Chrome F / Satin Grey P / Brushed Brass Z / Other Metallic	BB / Black 9005 WB / White 9010 DB / White 9003 CB / Other RAL AB / Black Anodised JB / Antique Bronze MB / Polished Brass KB / BrushedChrome LB / PolishedChrome FB / Satin Grey PB / Brushed Brass ZB / Other Metallic	20 / IP20 H / Honeycomb N / Frosted Lens
* Increase 3000k by 7%							