


**cloud pendnt**  
**for shallow track 48v**  
**origin natural**

**circular product**

**cloud pendant**  
**for shallow track 48v**  
**origin natural**

---

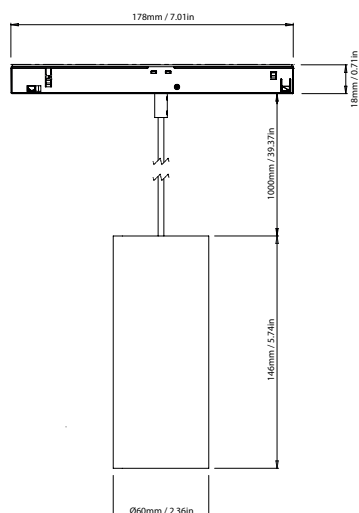

# cloud pendant for shallow track 48v origin natural

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

1

The fully repaired and tested product enters back into our stock –with a brand new warranty.

3

The 'new' light fitting is despatched to a new customer.

4

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

2



circular product

orluna

# cloud pendant for shallow track 48v origin natural

## circular product

| 2700K        |                     |       |        |        |      |       |      |            |        |        |
|--------------|---------------------|-------|--------|--------|------|-------|------|------------|--------|--------|
| LIGHT VALUES | SPOT                |       |        | SOFT   |      |       |      | SPECIALITY |        |        |
|              | Ultra               | Spot  | Narrow | Medium | Wide | Flood | Wash | Crisp      | Linear |        |
|              | Beam Width FWHM     | 8°    | 10°    | 14°    | 31°  | 43°   | 48°  | 56°        | 33°    | 10x45° |
|              | Initial Lumens      | 678   | 1078   | 1263   | 1263 | 1263  | 1263 | 1263       | 1263   | 1078   |
|              | Engine Lumens       | 241   | 403    | 441    | 994  | 1028  | 981  | 992        | 1029   | 355    |
|              | Luminaire Lumens    | 238   | 353    | 421    | 719  | 734   | 726  | 653        | 820    | 283    |
|              | Engine Lm/W         | 33    | 32     | 37     | 84   | 86    | 82   | 83         | 86     | 28     |
|              | Luminaire Cd        | 7272  | 8247   | 5952   | 1921 | 1355  | 1135 | 805        | 2274   | 749    |
| POWER        | Voltage             | 36V   | 36V    | 34V    |      |       |      |            |        | 36V    |
|              | Drive Current       | 200mA | 350mA  | 350mA  |      |       |      |            |        | 350mA  |
|              | Circuit Power (typ) | 8.6W  | 14.2W  | 13.5W  |      |       |      |            |        | 14.2W  |

| 3000K        |                     |       |        |        |      |       |      |            |        |        |
|--------------|---------------------|-------|--------|--------|------|-------|------|------------|--------|--------|
| LIGHT VALUES | SPOT                |       |        | SOFT   |      |       |      | SPECIALITY |        |        |
|              | Ultra               | Spot  | Narrow | Medium | Wide | Flood | Wash | Crisp      | Linear |        |
|              | Beam Width FWHM     | 8°    | 10°    | 14°    | 30°  | 43°   | 48°  | 56°        | 34°    | 10x45° |
|              | Initial Lumens      | 712   | 1148   | 1328   | 1328 | 1328  | 1328 | 1328       | 1328   | 1148   |
|              | Engine Lumens       | 253   | 423    | 462    | 1042 | 1079  | 1026 | 1039       | 1077   | 386    |
|              | Luminaire Lumens    | 250   | 382    | 442    | 757  | 773   | 762  | 708        | 863    | 307    |
|              | Engine Lm/W         | 35    | 34     | 39     | 88   | 91    | 86   | 87         | 91     | 31     |
|              | Luminaire Cd        | 7894  | 9171   | 6541   | 2086 | 1429  | 1176 | 862        | 2381   | 740    |
| POWER        | Voltage             | 36V   | 36V    | 34V    |      |       |      |            |        | 36V    |
|              | Drive Current       | 200mA | 350mA  | 350mA  |      |       |      |            |        | 350mA  |
|              | Circuit Power (typ) | 8.6W  | 14.2W  | 13.5W  |      |       |      |            |        | 14.2W  |

| DRIVER | 2<br>98 (99)<br>Rf 97.7 Rg 100.4<br>L90 B5 50,000hrs (inc driver)<br>L70 426,000hrs |  |  |  |  |  |  |  |  |  |
|--------|-------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
|        | DALI<br>0.1% Lux                                                                    |  |  |  |  |  |  |  |  |  |

### SPECIFICATION CODE

| Engine type | Bezel                        | Colour Temp                             | Driver   | Beam Width                                                                                                                   | Bezel Colour                                                                                                                                                                                                                                                | Baffle Colour                                                                                                                                                                                                                                               | Options                                        |
|-------------|------------------------------|-----------------------------------------|----------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| <b>NL</b>   | <b>- PSTW -</b>              | <b>27</b>                               | <b>D</b> | <b>M</b>                                                                                                                     | <b>- W -</b>                                                                                                                                                                                                                                                | <b>BB</b>                                                                                                                                                                                                                                                   | <b>- 54 H</b>                                  |
|             | PSTW / White<br>PSTB / Black | 27 / 2700K<br>30 / 3000K<br>*40 / 4000K | D / DALI | U / Ultra<br>S / Spot<br>N / Narrow<br>M / Medium<br>W / Wide<br>F / Flood<br>H / Wash<br>C / Crisp<br>L / Elliptical Linear | W / White RAL 9010<br>D / White RAL 9003<br>B / Black RAL 9005<br>C / Other RAL<br>A / Black Anodised<br>J / Antique Bronze<br>G / Polished Brass<br>K / Brushed Chrome<br>L / Polished Chrome<br>F / Satin Grey<br>P / Brushed Brass<br>Z / Other Metallic | BB / Black 9005<br>WB / White 9010<br>DB / White 9003<br>CB / Other RAL<br>AB / Black Anodised<br>JB / Antique Bronze<br>MB / Polished Brass<br>KB / Brushed Chrome<br>LB / Polished Chrome<br>FB / Satin Grey<br>PB / Brushed Brass<br>ZB / Other Metallic | 54 / IP54<br>H / Honeycomb<br>N / Frosted Lens |

\* Increase 3000k by 7%