




LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Private Houses, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Suspended.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, RG1, CRI>80, MacAdam Step <3, 80.000h lifetime (@L90, B10, Ta25 °C).

Optical System: Diffuser: Microprismatic or Opal

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium and steel sheet.

Surface Finish: Powder coated.

gCONTROL+ - Microprismatic PMMA diffuser

LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤19	32	3752	117	Ø400x60	-	90587.L400.E	90587.L400.H
	≤19	56	6930	124	Ø600x60	•	90587.L600.E	90587.L600.H
	≤19	84	11296	134	Ø900x60	•	90587.L900.E	90587.L900.H
	≤19	137	18150	132	Ø1150x60	•	90587.L115.E	90587.L115.H

LIGHT+ - Opal PMMA diffuser


LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤25	32	3906	122	Ø400x60	-	90589.L400.E	90589.L400.H
	≤22	56	7222	134	Ø600x60	•	90589.L600.E	90589.L600.H
	≤22	66	11883	141	Ø900x60	•	90589.L900.E	90589.L900.H
	≤22	137	19360	141	Ø1150x60	•	90589.L115.E	90589.L115.H

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

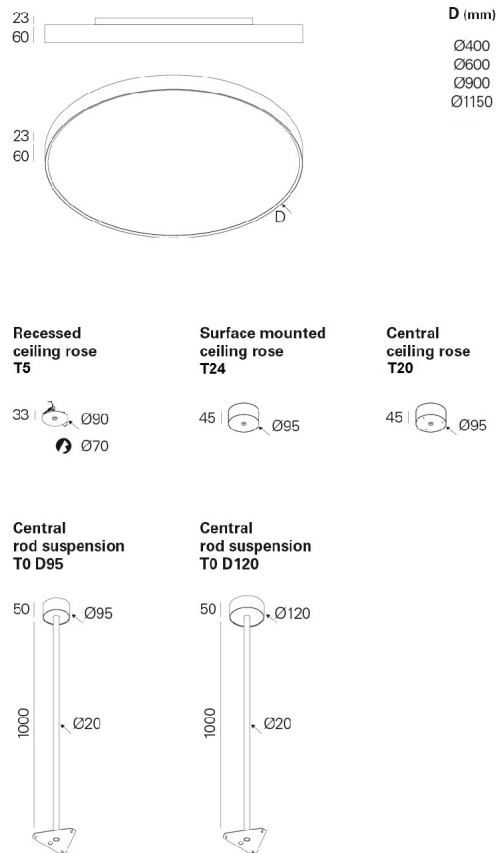

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

Ceiling rose



Ceiling rose
Circular surface
Circular recessed

Order Code

9786

9713

• To order this option, please choose colour required to the ceiling rose

Central ceiling rose




Ceiling rose

• To order this option, please choose colour required to the ceiling rose.

Order code
977211

Suspension rod



Suspension rod
Ø95 mm (Ø400-600 mm)
Ø120 mm (Ø900-1150 mm)

Order code

913000

913010

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

Current supply cable



1,5 m transparent current cable 0,75 mm²
 3 x 0,75 mm²
 5 x 0,75 mm²
 1,5 m transparent current cable 1,5 mm²
 7 x 1,5 mm²
 9 x 1,5 mm²

Order code

940400

940500

940100

941200

Suspension



Suspension Type "I" 1,5m (x3)
 Suspension Type "I" 3m (x3)

Order Code

911100

9111003MT

Emergency unit



Emergency unit 3 hours

• Prepared for Remote-control

Order Code

K3

Low output version



This option can be supplied on request

DETAILS



gCONTROL+
diffuser



LIGHT+ diffuser



Wall mounted
application



Ceiling surface
application



Suspended
application for
central ceiling rose



Central ceiling rose




Suspended
application with
external
perpendicular
suspensions



Recessed ceiling
rose




Suspended
application with
internal
perpendicular
suspensions



Recessed ceiling
rose with
perpendicular
suspensions



Central ceiling rose
with internal
perpendicular
suspensions




Suspension rod




Suspension rod
application

PHOTOMETRY



ROFY 60 D/I
HO LIGHT+



ROFY 60 D/I
HO gCONTROL+

TO SPECIFY:

Surface (wall and ceiling) or suspended circular LED luminaire with low height body, with direct and indirect light. Powder coated extruded aluminium body, available in 16 different colours. Available in 5 diameters, 300, 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver, 3h emergency unit, S10 suspension and transparent current supply cable. Possible to choose between recessed ceiling rose T5 D90 or surface mounted ceiling rose T24 D95 and central surface mounted ceiling rose T21. – as Roxo Lighting ROFY 60 D/I.

We reserve the right to make technical changes without prior notice.
 Electrical/Optical data are subjected to a tolerance of +/-10%.