



Norms: EN 60598-1, EN 60598-2-2



230V/50Hz

PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Recessed.

Light Distribution: Direct / Indirect.

Light Source: LED 4000K, RG1, CRI>80, MacAdam Step <3, 80.000h lifetime (@L90, B10, Ta25 °C).

Optical System: Diffuser: Microprismatic or Opal

Control Gear: LED driver, 220-240VAC-50/60Hz.

Materials: Body: Extruded aluminium and steel sheet.

Surface Finish: Powder coated.

gCONTROL+ - Microprismatic PMMA diffuser



LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤19	32	3752	117	Ø400x60	-	90591.L400.E	90591.L400.H
	≤19	56	6930	124	Ø600x60	•	90591.L600.E	90591.L600.H
	≤19	84	11296	134	Ø900x60	•	90591.L900.E	90591.L900.H
	≤19	137	18150	132	Ø1150x60	•	90591.L115.E	90591.L115.H

LIGHT+ - Opal PMMA diffuser




LED	UGR	W	Lm Output	Lm/W	AxB (mm)	K3	HF	DALI
	≤25	32	3906	122	Ø400x60	-	90593.L400.E	90593.L400.H
	≤22	56	7222	134	Ø600x60	•	90593.L600.E	90593.L600.H
	≤22	66	11883	141	Ø900x60	•	90593.L900.E	90593.L900.H
	≤22	137	19360	141	Ø1150x60	•	90593.L115.E	90593.L115.H

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH


Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

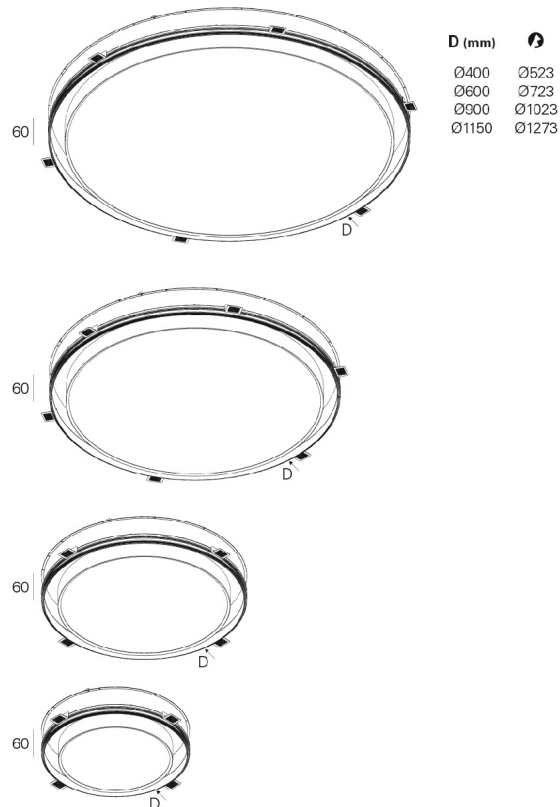

OPTIONS

Colour temperature



3000K
Tunable White

Order code
3000
T000

Emergency unit



Emergency unit 3 hours

• Prepared for Remote-control

Order Code
K3

Low output version



This option can be supplied on request

Tilted bracket




Tilted bracket


Order Code
9271

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.

DETAILS



LIGHT+ diffuser



gCONTROL+
diffuser



Horizontal bracket



Tilted bracket




Horizontal bracket




Tilted bracket

PHOTOMETRY



ROFY 60 /T
H0 LIGHT+



ROFY 60 /T
H0 gCONTROL+

TO SPECIFY:

Trimless recessed circular LED luminaire with low height body, with direct and indirect light. Powder coated extruded aluminium body, available in 16 different colours. Available in 5 diameters 400, 600, 900 and 1150mm, with opal acrylic diffuser (PMMA) for homogenous light diffusion or with microprismatic diffuser for glare control. Standard version with 4000K LED, RG1 (Photobiological Risk Group 1, according to IEC 62471), CRI>80, 80.000 lifetime (@L80, B10, Ta 25 C). Available as option in 3000K, Tunable White (2700-6500K), with dimmable DALI driver and 3h emergency unit. – as Roxo Lighting ROFY 60 /T D/I.

We reserve the right to make technical changes without prior notice.
Electrical/Optical data are subjected to a tolerance of +/-10%.