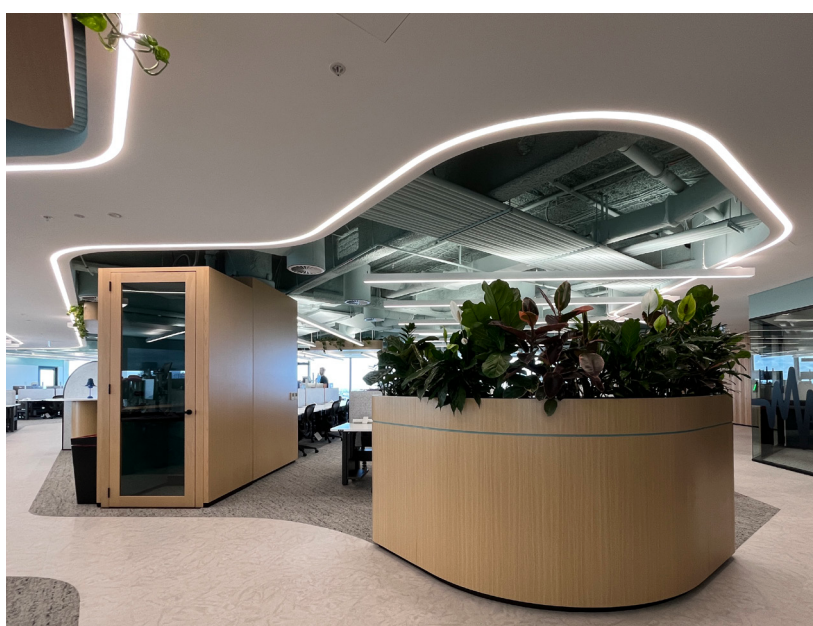


B4 FOURline

Curved Profile Series









B4 FOURline - Curved Profile Series

- Opal PMMA diffuser
- Various wattages 14.4W or 28.8W & 14.4W (RGBW) bendable LED Strip
- Aluminium profiles available in white & black matt textured finishes or custom RAL colours
- 2700K, 3000K, 3500K, 4000K, RGBW
- Recessed, surface mounted & suspended options
- Remote 24VDC power supplies available in Non-Dim, 1-10V, DMX, DALI or Casambi



B4 FOURline

Curved Profile Series

B4-FL-C25S / Surface / Suspended	B4-FL-C25H / Suspended	B4-FL-C35S / Surface / Suspended	B4-FL-C35R / Recessed
			
			
Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 14.4W/m 60LED up to 838lm @ 4K 14.4W/m 48LED RGBW up to 307lm @RGBW Min Radius - 300mm	Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 28.8W/m (2x Strips) up to 1675lm @ 4K 14.4W/m 48LED RGBW up to 307lm @RGBW Min Radius - 300mm	Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 14.4W/m 60LED up to 838lm @ 4K 28.8W/m (2x Strips) up to 1675lm @ 4K 14.4W/m 48LED RGBW up to 307lm @RGBW Min Radius - 300mm	Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 14.4W/m 60LED up to 838lm @ 4K 28.8W/m (2x Strips) up to 1675lm @ 4K 14.4W/m 48LED RGBW up to 307lm @RGBW Min Radius - 300mm
B4-FL-C50S / Surface / Suspended	B4-FL-C50R / Recessed	B4-FL-C50H / Suspended	B4-FL-C35V / Suspended
			
			
Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 28.8W/m (2x Strips) up to 2000lm @ 4K 14.4W/m 48LED up to 415lm @RGBW Min Radius - 300mm	Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 28.8W/m (2x Strips) up to 2000lm @ 4K 14.4W/m 48LED up to 415lm @RGBW Min Radius - 300mm	Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 28.8W/m (2x Strips) up to 2000lm @ 4K 14.4W/m 48LED up to 415lm @RGBW Min Radius - 300mm	Colour / CCT 27K / 30K / 35K / 40K / RGBW Wattages 28.8W/m (2x Strips) up to 2000lm @ 4K 14.4W/m 48LED up to 415lm @RGBW Min Radius - 350mm

B4 FOURline

Curved Profile Series

B4 FOURline - LED Curved Profile Series (example specification text)

B4 FOURline Curved surface mounted 25mm profile, Opal PMMA diffuser, High Output+ 14.4W 60Leds Per/m warm white 3000K, CRI>90, 838Lm IP20 per meter, 100mm cutting intervals, (max run 5m per feed), White finish c/w remote 24V DC DALI power supply

B4-FL	C25S	OP	SMD	15W	930	SI	DALI
B4-FL	Profile	Diffuser	Light Source	Wattage	Colour temp	Finish	Control
	C25S - Surf/Susp 25 C25H - Up/Down 25 C35S - Surf/Susp 35 C35R - Recessed 35 C50S - Surf/Susp 50 C50R - Recessed 50 C50H - Up/Down 50 C35V - Suspended V	OP - Opal PMMA	SMD - Multi Chip 100mm cutting intervals except RGBW which is 125mm	15W - 14.4W 30W - 28.8W *C25 only available with single strip	927 - 2700K warm white 930 - 3000K warm white 935 - 3500K neutral white 940 - 4000K cool white RGBW - RGB (W=3K/4K)	SI - Silver Anodised BK - Matt Black WH - Matt White RAL - Custom RAL	ND - Non dim DIM - 1-10v DALI - Dali DMX - DMX CAS - Casambi

