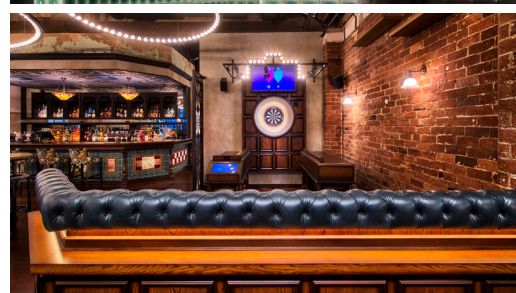
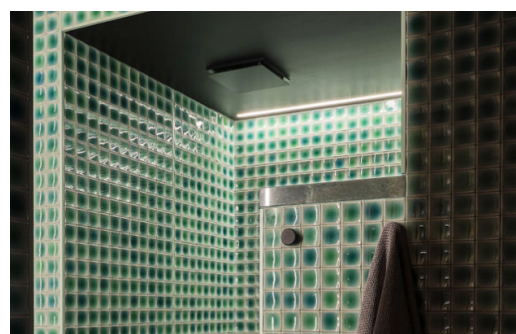
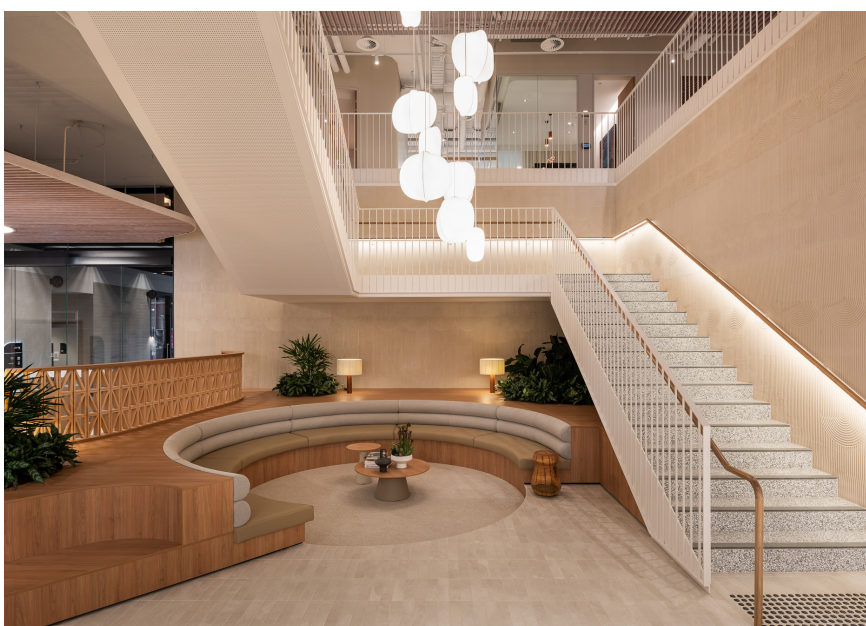


B4 FOURline

Rigid LED Series












B4 FOURline - LED Aluminum profile

- Clear, opal or frosted polycarbonate diffuser options
- Various wattages 4.8w, 9.6w, 14.4w, 19.2w & 26w (RGBW)
- Aluminium profiles available in anodised silver, white & black matt textured finishes or custom colours
- 2700k, 3000k, 3500k, 4000k, RGB, RGBW & Tunable white
- Recessed, surface mounted & suspended options
- Remote 24VDC power supply available in (Non-Dim, 1-10V, DMX or DALI) Casambi



B4 FOURline

Rigid LED Series

B4-FL-R35 / Recessed	B4-FL-S35 / Surface / Suspended	B4-FL-SM9 / Surface	B4-FL-C18 / Corner
			
			
Colour / CCT 27K / 30K / 35K / 40K / RGBW / TW Wattages 14.4W 210LED up to 780lm @ 4K 19.2W 210LED up to 1032lm @ 4K 27.4W 84LED RGBW up to 748lm @RGBW 19.2W 240LED TW 2300K-6500K 1248lm	Colour / CCT 27K / 30K / 35K / 40K / RGBW / TW Wattages 14.4W 210LED up to 780lm @ 4K 19.2W 210LED up to 1032lm @ 4K 27.4W 84LED RGBW up to 748lm @RGBW 19.2W 240LED TW 2300K-6500K 1248lm	Colour / CCT 27K / 30K / 40K Wattages 9.6W 120LED up to 385lm @ 4K	Colour / CCT 27K / 30K / 35K / 40K / TW Wattages 4.8W 70LED up to 310lm @ 4K 9.6W 120LED up to 610lm @ 4K 14.4W 210LED up to 921lm @ 4K
B4-FL-S15 / Surface	B4-FL-S8 / Surface	B4-FL-R15 / Recessed	B4-FL-R8 / Recessed
			
			
Colour / CCT 27K / 30K / 35K / 40K / TW Wattages 4.8W 70LED up to 282lm @ 4K 9.6W 120LED up to 556lm @ 4K 14.4W 210LED up to 836lm @ 4K 19.2W 210LED up to 1145lm @ 4K	Colour / CCT 27K / 30K / 35K / 40K / TW Wattages 4.8W 70LED up to 380lm @ 4K 9.6W 120LED up to 752lm @ 4K 14.4W 210LED up to 1140lm @ 4K	Colour / CCT 27K / 30K / 35K / 40K / TW Wattages 4.8W 70LED up to 282lm @ 4K 9.6W 120LED up to 556lm @ 4K 14.4W 210LED up to 836lm @ 4K 19.2W 210LED up to 1145lm @ 4K	Colour / CCT 27K / 30K / 35K / 40K / TW Wattages 4.8W 70LED up to 380lm @ 4K 9.6W 120LED up to 752lm @ 4K 14.4W 210LED up to 1140lm @ 4K

B4 FOURline

Rigid LED Series

B4 FOURline - LED Aluminum profile

B4 FOURline surface mounted 15mm profile, Opal PMMA diffuser, High Output+ 14.4w 210Leds Per/m warm white 3000K, CRI>90 3 SDCM, 836Lm IP20 per meter, 33.3mm cutting intervals, (max run 6m), Silver anodised finish c/w remote 24V DC DALI power supply

B4-FL	S15	OP	SMD	15W	930	SI	DALI
B4-FL	Profile	Diffuser	Light Source	Wattage	Colour temp	Finish	Control
S8 - Surface 8 S15 - Surface 15 R8 - Recessed 8 R15 - Recessed 15 C18 - Corner 18 SM9 - Surface Micro 9 S35 - Surface 35 R35 - Recessed 35 SS35 - Suspended 35	OP - Opal PMMA FR - Frosted PMMA CLR - Clear PMMA	SMD - Multi Chip COB - Continuous	5W - 4.8W 10W - 9.6W 15W - 14.4W 20W - 19.2W 28W - 27.5W **RGBW 21W - 21.2W **TW	927 - 2700k warm white 930 - 3000k warm white 935 - 3500k neutral white 940 - 4000k cool white RGBW - RGB (W=3K/27K) TW - 2300-6500K	SI - Silver Anodised BK - Matt Black WH - Matt White	ND - Non dim DIM - 1-10v DALI - Dali DMX - DMX CAS - Casambi	
Continuous COB recommend for 8mm profiles for Dot-Free illumination							

