



Date
Customer
Project
Type

Chival Wall Up/Down 292 2x LED DE

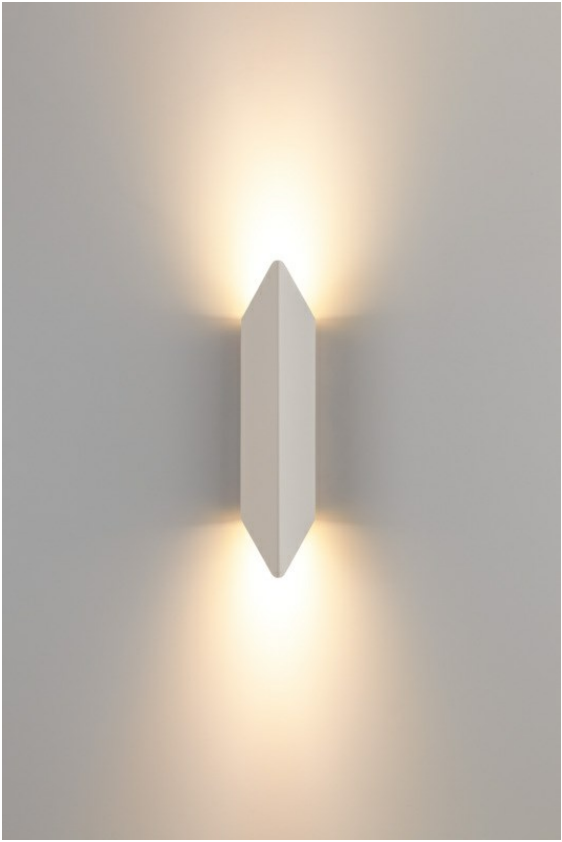

Formed by one single, pleated plate, Chival shows elements of sharp design and refined craftsmanship. Its up and down vertical light is a natural continuation of the shape, which was inspired by medieval coats of arms. Alone, Chival is beautiful and timeless. Try two or more, and you'll see a conversation of shadow, light and patterns taking shape.



Specifications

Material		
Light Source Type	LED	
LED Type	CREE 1304	
LED technology	LED COB	
CRI	Min. 90	
Colour Temperature	2700K/3000K	
Lifetime	L80B20 @50,000 Hours	
Lamp Included	Yes	
Number of Light Sources	2	
CIE flux code	87 94 98 50 69	
Binning (SDCM)	2	
Light Direction	Up/Down	
Optic	Collimator	
Measured beam angle (°)	34.0	
Input Voltage	Remote Constant Current Driver Required	
Electrical Class	III	
IP Rating	20	
Glow wire rating (°C)	960	
Indoor/Outdoor	Indoor	
Application	Wall	
Mounting	Surface	
Adjustability	Not Applicable	
Distance to Lighted Object (m)	0,1	
Primary Colour & Primary Finish	Grey White Structure, Champagne Brushed Ano, Black Chrome, Black Brushed Ano, Silver Bronze Ano, Bronze Brushed Ano	
Gross weight (g)	370.0	
Drive current (mA)	350	500
Min. forward voltage (Vf)	7.5	7.8
Max. forward voltage (Vf)	9.5	9.8
Connected load (W)	3.0	4.4
Delivered lumens (lm)	<528	<722
Efficacy (lm/W)	88	81
Glare rating	28	29