

Date


Customer

Project


Type

SLD50 High Suspended

If more powerful light combined with same brilliant esthetics is your desire, SLD50 High fulfills it. Perfect for a space in which users require an extra degree of visual comfort. Its deep recessed light units provide powerful luminance, the perfect fit for an office looking to add architectural feel to its ambiance. Available in various anodised colours, trimless, in a surface-mounted, suspended and recessed version, and with flange, for the recessed version only.

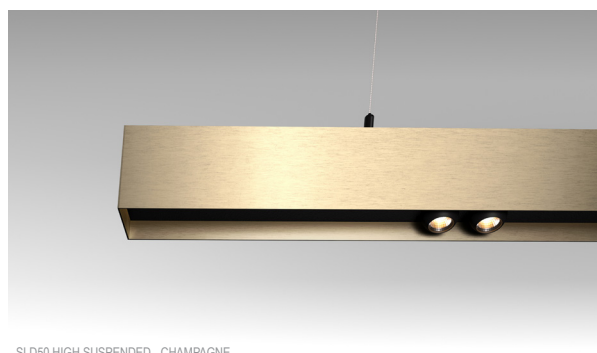

SLD50 High Suspended

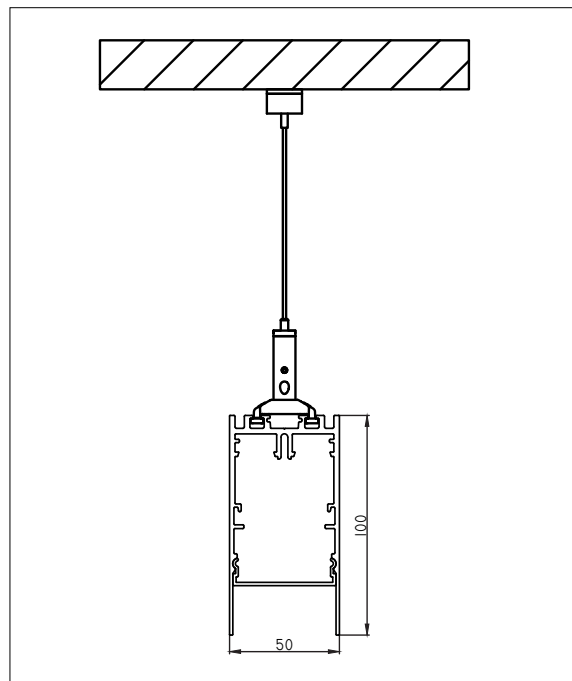

SLD50 HIGH

Base Profile

Dimensions	100mm x 50mm (h x w)
Base thickness	1.5mm
Mounting	Ceiling suspended
Indoor/Outdoor	Indoor
Finish*	Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years

Profile Cover

Finish*	Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
---------	---

* not all colour combinations are possible, please refer to our configurator to see matching colours

Diffusor

Type	Polycarbonate Prismatic polycarbonate
------	--

Lighting Modules

Linear Lighting module

LED type	High power LED line
Colour temperature	2700K, 3000K, 4000K, 2700K-6500K tunable white
Dimming	Non-dimmable, Dali/Pushdim, Casambi Available in preset dimmed version 50% Flicker-free (AM dimming)

Spot Lighting module

LED type	LED Array
Adjustability	h 360° v -30°/+30°
Beam angle	Medium (25°), Flood (40°)
Colour temperature	2700K, 3000K, 4000K
Dimming	Trailing edge, 1-10V, Dali/Pushdim, Casambi

Linear LED Strip 24V Uplight


LED type	LED Strip - diffusor included
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, Dali/Pushdim, Casambi

Finish Information

(RAL finish available on request)



aluminium
(anodised)




bronze
(brushed anodised)




champagne
(brushed anodised)



silver bronze
(brushed anodised)




black structure
(powder coating)



white structure
(powder coating)


SLD50 High Suspended

Base Profile




- 93590005** SLD50 HIGH PROFILE ALU/M
- 93590018** SLD50 HIGH PROFILE ANO BRONZE/M
- 93590041** SLD50 HIGH PROFILE CHAMPAGNE/M
- 93590006** SLD50 HIGH PROFILE ANO SILVER BRONZE/M
- 93590032** SLD50 HIGH PROFILE BLACK STRUC/M
- 93590009** SLD50 HIGH PROFILE WHITE STRUC/M

Profile Cover




- 93560205** SLD50 COVER ALU/M
- 93560218** SLD50 COVER ANO BRONZE/M
- 93560241** SLD50 COVER CHAMPAGNE/M
- 93560206** SLD50 COVER ANO SILVER BRONZE/M
- 93560232** SLD50 COVER BLACK STRUC/M
- 93560209** SLD50 COVER WHITE STRUC/M

Diffusor




- 93560000** SLD50 POLY IN/M
- 93560200** SLD50 PRISMATIC POLY IN/M

Endplate




- 93590205** SLD50 HIGH ENDPLATE ALU
- 93590218** SLD50 HIGH ENDPLATE ANO BRONZE
- 93590241** SLD50 HIGH ENDPLATE CHAMPAGNE
- 93590206** SLD50 HIGH ENDPLATE ANO SILVER BRONZE
- 93590232** SLD50 HIGH ENDPLATE BLACK STRUC
- 93590209** SLD50 HIGH ENDPLATE WHITE STRUC

Connection




- 93590054** SLD50 HIGH CONNECTION 180° 3-5P
- 93590056** SLD50 HIGH CONNECTION 180° 6-9P




- 93590055** SLD50 HIGH CONNECTION 90° 3-5P
- 93590057** SLD50 HIGH CONNECTION 90° 6-9P

Fixation / Mounting




- 93560805** SLD50 SUSPENSION 4M ALU
- 93560832** SLD50 SUSPENSION 4M BLACK STRUC
- 93560809** SLD50 SUSPENSION 4M WHITE STRUC




- 93001005** HINGE FOR LOW CONE ALU
- 93001032** HINGE FOR LOW CONE BLACK STRUC
- 93001009** HINGE FOR LOW CONE WHITE STRUC


Electrical Supply




- 93590052** SLD50 HIGH HOLE FOR POWER SUPPLY 3-5P
93590053 SLD50 HIGH HOLE FOR POWER SUPPLY 6-9P




- 93002003** POWER FEED KIT 2M 3X1.5MM² ALU
93003203 POWER FEED KIT 2M 3X1.5MM² BLACK STRUC
93002903 POWER FEED KIT 2M 3X1.5MM² WHITE STRUC
93002005 POWER FEED KIT 2M 5X1.5MM² ALU
93003205 POWER FEED KIT 2M 5X1.5MM² BLACK STRUC
93002905 POWER FEED KIT 2M 5X1.5MM² WHITE STRUC
93003303 POWER FEED KIT 2M 6X0.75 ALU
93003305 POWER FEED KIT 2M 6X0.75 BLACK STRUC
93003304 POWER FEED KIT 2M 6X0.75 WHITE STRUC




- 93003906** POWER FEED KIT 2M 9X0.75MM² ALU
93003908 POWER FEED KIT 2M 9X0.75MM² BLACK STRUC
93003907 POWER FEED KIT 2M 9X0.75MM² WHITE STRUC



- 93002151** CONNECTION BOX 3P FOR TRANSPARANT CABLE ALU
93003151 CONNECTION BOX 3P FOR TRANSPARANT CABLE BLACK STRUC
93002951 CONNECTION BOX 3P FOR TRANSPARANT CABLE WHITE STRUC
93002251 CONNECTION BOX 5P FOR TRANSPARANT CABLE ALU
93003251 CONNECTION BOX 5P FOR TRANSPARANT CABLE BLACK STRUC
93003951 CONNECTION BOX 5P FOR TRANSPARANT CABLE WHITE STRUC
93003451 CONNECTION BOX 6P FOR TRANSPARENT CABLE ALU
93003651 CONNECTION BOX 6P FOR TRANSPARENT CABLE BLACK STRUC
93003551 CONNECTION BOX 6P FOR TRANSPARENT CABLE WHITE STRUC



- 93005051** CONNECTION BOX 9P FOR TRANSPARENT CABLE ALU
93005251 CONNECTION BOX 9P FOR TRANSPARENT CABLE BLACK STRUC
93005151 CONNECTION BOX 9P FOR TRANSPARENT CABLE WHITE STRUC




- 93002152** TRANSPARANT CABLE 3X1.5MM²/M
93002252 TRANSPARANT CABLE 5X1.5MM²/M
93003452 TRANSPARANT CABLE 6X0.75MM²/M
93003552 TRANSPARANT CABLE 9X0.75MM²/M

Supplements

- 93002000** SUPPL. EXTRA CIRCUIT /M (2 STANDARD)

SLD50 High Suspended



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

Linear LED Fortimo LEDline

	2700K	3000K	4000K	2700K-6500K	Module length (mm)
2x	9X591002	9X592002	9X593002	-	560
3x	9X591003	9X592003	9X593003	98564303	840
4x	9X591004	9X592004	9X593004	98564304	1120
5x	9X591005	9X592005	9X593005	98564305	1400
6x	9X591006	9X592006	9X593006	98564306	1680
7x	9X591007	9X592007	9X593007	-	1960

Lamp type	MED POWER LED
Delivered lumens	1821lm/m (2700K) 1781lm/m (3000K) 2078lm/m (4000K) 1781lm/m (Tunable White @2700K) 1801lm/m (Tunable White @6500K)
Connected load*	29W/m 28W/m (Tunable White @2700K) 25W/m (Tunable White @6500K)
Efficacy*	61lm/W 63lm/W (Tunable White @2700K) 72lm/W (Tunable White @6500K)
UGR*	21
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.

* values for poly

SUPPLEMENTS


93551011*	PROFILE EMERGENCY PACK 3H
98564308**	CASAMBI DIM MODULE DALI
98564307***	CASAMBI DIM MODULE DALI 2,7-6,5K TW

*only for 2700K, 3000K, 4000K in 6x and 7x

**only for 2700K, 3000K, 4000K, only for dali

***only for tunable white 2700K - 6500K

SLD50 High Suspended



NON-DIM	-3-----
DALI/PUSHDIM	-8-----

Linear LED Fortimo LEDline + lens 50°

	2700K	3000K	4000K	Module length (mm)
2x	9X591102	9X592102	9X593102	560
3x	9X591103	9X592103	9X593103	840
4x	9X591104	9X592104	9X593104	1120
5x	9X591105	9X592105	9X593105	1400
6x	9X591106**	9X592106**	9X593106**	1680
7x	9X591107**	9X592107**	9X593107**	1960

Lamp type	MED POWER LED
Delivered lumens	2544lm/m (2700K) 2487lm/m (3000K) 2900lm/m (4000K)
Connected load*	29W/m
Efficacy*	86lm/W
UGR*	16
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.
Remark	Combine with a prismatic poly clear to create an office compliant solution

* values for lens 50° prismatic @3000K

Linear LED Fortimo LEDline Preset 50% + lens 50°

	2700K	3000K	4000K	Module length (mm)
3x	9X594103	9X595103	9X596103	840
4x	9X594104	9X595104	9X596104	1120
5x	9X594105	9X595105	9X596105	1400
6x	9X594106	9X595106	9X596106	1680
7x	9X594107	9X595107	9X596107	1960

Lamp type	MED POWER LED
Delivered lumens	1547lm/m (2700K) 1511lm/m (3000K) 1764lm/m (4000K)
Connected load*	17W/m
Efficacy*	89lm/W
UGR*	14
Binning	3SDCM
Lifetime	L80 B10 @50000hrs.
Remark	Combine with a prismatic poly clear to create an office compliant solution

* values for lens 50° prismatic @3000K

SUPPLEMENTS

93551011* PROFILE EMERGENCY PACK 3H

98564308** CASAMBI DIM MODULE DALI


98564307*** CASAMBI DIM MODULE DALI 2,7-6,5K TW

*only for 2700K, 3000K, 4000K in 6x and 7x

**only for 2700K, 3000K, 4000K, only for dali

***only for tunable white 2700K - 6500K

SLD50 High Suspended



Linear LED Strip 24V Uplight

1000lm/m

	2700K	3000K	4000K
mounted/m	93000512	93000513	93000514

2000lm/m

	2700K	3000K	4000K
mounted/m	93000010	93000011	93000012

3600lm/m

	2700K	3000K	4000K
mounted/m	93000038	93000039	93000040

Lamp type	LED STRIP - diffuser included			
		1000lm/m	2000lm/m	3600lm/m
Delivered lumens	2700K	806lm/m	1411lm/m	2482lm/m
	3000K	859lm/m	1441lm/m	2632lm/m
	4000K	781lm/m	1372lm/m	2763lm/m
Connected load	2700K	10.8W/m	18.9W/m	28W/m
	3000K	10.8W/m	18.9W/m	28W/m
	4000K	9.6W/m	16.6W/m	28W/m
Efficacy	2700K	75lm/W	75lm/W	89lm/W
	3000K	80lm/w	76lm/W	94lm/W
	4000K	81lm/W	83lm/W	99lm/W
Binning	3SDCM			
Lifetime	L80 B10 @50000hrs.			

DRIVERS


93009520	LED DRIVER 24V 60W
96009520	LED DRIVER 24V 60W 1-10V
96009560	LED DRIVER 24V 100W 1-10V
98009520	LED DRIVER 24V 100W DALI/PUSHDIM

SUPPLEMENTS

93560050	LED STRIP 24V CONNECTION
98564308*	CASAMBI PROF DIM MODULE DALI

*only when combined with LINEAR LED FORTIMO in the same configuration

SLD50 High Suspended



Eyeball 1x

	2700K		3000K		4000K		Module length (mm)
	25°	40°	25°	40°	25°	40°	
black struc	93591332	93591232	93591532	93591432	93591732	93591632	60
white struc	93591309	93591209	93591509	93591409	93591709	93591609	60

Lamp type	1x LED ARRAY
Adjustability	h 360° v -30°/+30°
Delivered lumens	523lm (2700K) 544lm (3000K) 595lm (4000K)
Connected load*	7.5W
Binning	3SDCM
Lifetime	L80 B20 @50000hrs.
Remark	Order LED driver separately Only in combination with 'cover'


* values for 25° white struc @3000K - driver incl.

DRIVERS		Module length
93567000	LED gear for eyeball 350mA 18W	150mm
96567000	LED gear for eyeball 350mA 15W 1-10V/pushdim	150mm
98567000	LED gear for eyeball 350mA 15W dali	150mm
97567000	LED gear for eyeball 350mA 40W 1-10V/pushdim/dali	335mm

SUPPLEMENTS	
98564308*	CASAMBI PROF DIM MODULE DALI

*only when combined with LINEAR LED FORTIMO in the same configuration

SLD50 High Suspended



Modupoint system

Combine with	Marbulito Jack
	Medard Jack
	Minude Jack
	Marbulito Jack Suspended
	Minude Jack Suspended
Remark	Modupoint LED stick required Order LED driver separately Only in combination with 'cover' Max. 3 modupoints per meter

93568000	SLD50/SLD50H Modupoint LED DE for 1xjack
----------	--

DRIVERS		Module length
93009500	LED gear 350mA 10W Tre dim for jack warm dim	102mm
93009501	LED gear 500mA 10W Tre dim for jack	102mm
96009500	LED gear 350mA 18W 1-10V/push dim for jack warm dim	220mm
96009501	LED gear 500mA 26W 1-10V/push dim for jack	220mm
98009500	LED gear 350mA 18W dali for jack warm dim	220mm
98009501	LED gear 500mA 26W dali for jack	220mm

SUPPLEMENTS	
98564308*	CASAMBI PROF DIM MODULE DALI

*only when combined with LINEAR LED FORTIMO in the same configuration